


# Floor Stand

**X** SERIES

**XP4280FS - 42U**

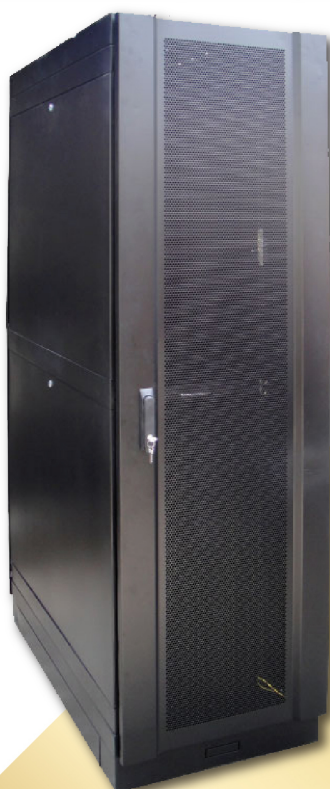


## Features & Specifications

- Internal system base with vented roof
- 2.0mm thickness metal frame
- Lockable honeycomb perforated front door c/w push lock
- Lockable honeycomb perforated rear swing door
- Lockable detachable side panels with latch
- 19" server compatible mounting elements
- 2.0mm thickness panel mounting members with "U" marking
- 40 sets M6 caged nuts & screws
- Heavy duty castor wheels
- Adjustable feet
- 4 ball bearing fans with fan tray
- 2 equipment trays
- Side vertical metal cable management panel
- Power Distribution Unit(PDU) (PS8001/BAM3205)
- Finished high quality epoxy powder coating (Black)
- Support weight up to 1500kg



Top Cover  
Vented Design



Equipment  
Tray



Ball Bearing  
Fans



Earthing  
cable



Side Panel  
Latch



19" Panel  
Mounting

Model	Capacity (U)	Height (mm)	Width (mm)	Depth (mm)	Packing Dimension (H*W*D)	Weight (kg)	PDU (nos)
XP4280FS	42	2050	600	800	2062 x 612 x 812	133.5	12

☒ Black
 ☐ Grey
 ☐ Beige

\* Customized sizes available upon request  
 \* Product shown is for illustration purpose only



**GV INDUSTRIES SDN. BHD**  
 NO. 28 & 30, Jalan TS 6/7, Taman Perindustrian Subang,  
 Taman Indah Subang Uep, 47150 Subang Jaya,  
 Selangor Darul Ehsan.  
 +603 - 8081 2216    sales@gvisb.com.my

**Penang Branch**  
 737-6-9, Sri Nibong Complex,  
 Jalan Sultan Azlan Shah,  
 11900 Penang  
 +604 - 642 8753

**Johor Branch**  
 No.49 & 49A, Jalan Pulai 23,  
 Taman Pulai Utama, 81300  
 Skudai, Johor, Malaysia  
 +607 - 520 5236