

**Weather Sealed
Built-in LED light!**
T8 or T5 tubes not required!




	lumiWP Weatherproof Batten LED Tube Series
CRI	Ra > 80 / R9 > 0
Input Power (DC)	180-240V 50/60Hz
Power Factor	> 0.95 @240VAC
Working Temp	Ambient Temperature Max 50°C
Projection Angle	120°
IP Rating	IP65
Housing Material	Frosted ABS Enclosure, Aluminium Plate & Weather Proof Connector

Part No	Wattage	Colour Temp	Lumens	Lumens Per Watt	Input Power (AC)	Dimension / Size	Weight	Warranty
WP2600C2	20	6000K	2640	132	240V @ 80mA	630mm (L) X 74mm (W) x 74mm (H)	750g	2 Years
WP2600N2	20	4000K	2640	132				
WP2600W2	20	3000K	2440	122		1220mm (L) X 38mm (W) x 38mm (H)	500g	
WP2600C	20	6000K	2640	132				
WP2600N	20	4000K	2640	132				
WP2600W	20	3000K	2440	122				
WP5000C	38	6000K	5016	132	240V @ 160mA	1230mm (L) X 74mm (W) x 74mm (H)	1300g	
WP5000N	38	4000K	5016	132				
WP5000W	38	3000K	4636	122				


Note: * ± 10% Lux accuracy * Test environment @ 25 °C *Specifications subject to change without prior notice. * Product images are for illustraton purposes only.

Drawing (Unit: mm)

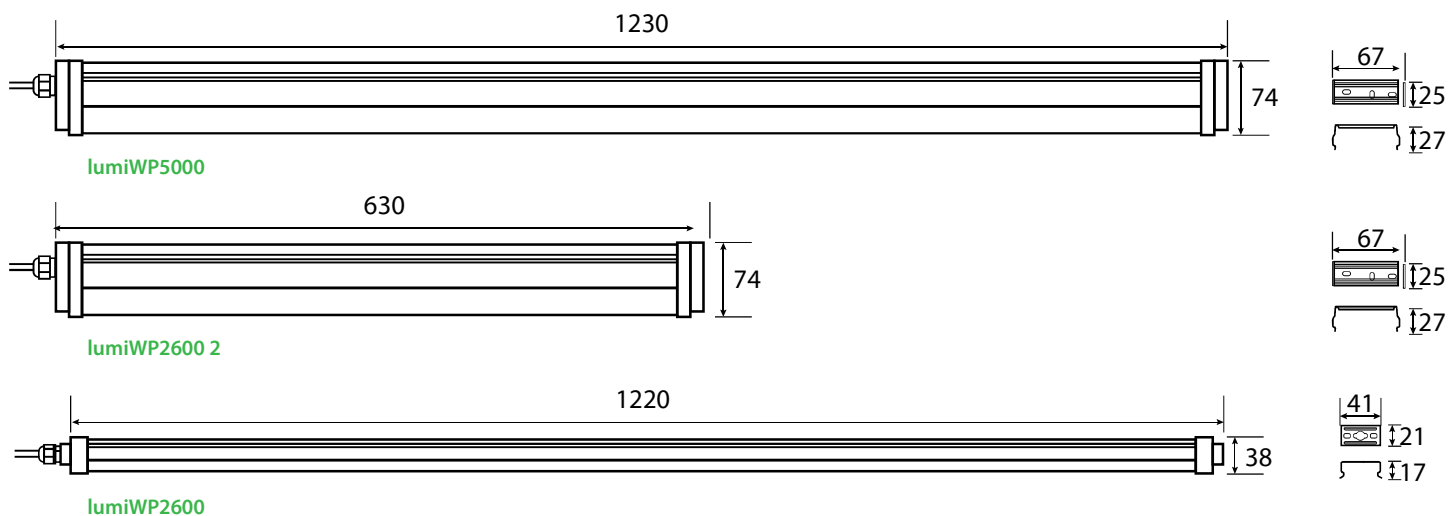

Installation Instructions


A - Chain Suspended Mounting

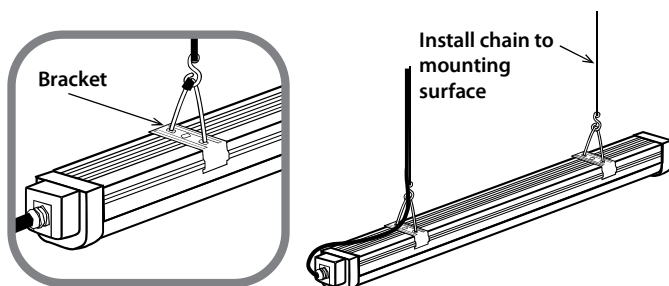

Chain Mounting with V-Hook

- Step 1 : Clip the brackets to the housing.
- Step 2 : Attach V-Hooks to brackets.
- Step 3 : Attach chain to the hooks and mounting surface.

B - Surface Mounting

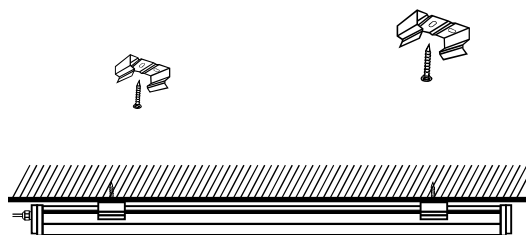

Surface Mounting

- Step 1 : Secure the brackets to the ceiling.
- Step 2 : Clip the housing onto the brackets.

Packaging Size

