

## STND Series

Warning lights with electric horn supports 30 prerecorded, 30 user defined sound tones(MP3)

### PRODUCT SPECIFICATION

STNDL | STND100 | STND125  
STNDL-N | STND100-N | STND125-N

**Materials** Lens-AS, Housing-ABS,  
Reflector-Heat resistant ABS

**Protection rating** IP54

**Compliant with RoHS directive**


- Combination of warning light and horn allows transmission of both visual and audible signals together
- Appropriate sound tones can be chosen depending on the various working environments among the various type of available sound tones
- Sound tone selector and volume controller in front of the device allows convenient use
- SD Card type allows user defined sound tone
- Built-in 30 sound tones, support binary and bit input modes
- Binary input mode allows the user to select from 30 different sound options with the tone selection switch
- Bit input mode consists of 5 sound types with 6 groups. Choose one of the groups to play 5 sounds from that group.(MP3 is separate from the 6 groups)
- Standard unit choose built-in sound only. It can choose 30 sounds in accordance with the customer's needs.



STND Series

### Sound Selection Instruction for SDcard Type

- SD card type unit
- It can choose both built-in sounds and user defined sounds(MP3) by controlling sound setup switch no. 1.
- Standard unit
- It can choose both Bit input mode and Binary input mode by controlling sound setup switch no. 1.



#### Sound Selection

- 0: Built-in sound
- 1: SD Card(MP3)

#### Standard unit(Built-in sound only)

- 0:Bit input(Can choose 5 channels per group)
- 1:Binary(Can choose 30 channels)

#### Bit input mode selection from 6 groups

- 001: WS(5 Warning sounds)
- 010: WP(5 Special warning sounds 1<sup>st</sup> group)
- 011: WM(5 Melodies)
- 100: WA(5 Alarms)
- 101: WO(5 Special warning sounds 2<sup>nd</sup> group)
- 110: WN(5 Special warning sounds 3<sup>rd</sup> group)

- 30 pre-recorded sounds offered(5 warning sounds, 5 special warning sounds 1st group, 5 melodies, 5 alarms, 5 special warning sounds 2nd group, 5 special warning sounds 3rd group)
- External MP3 sound support(SD card)
- Binary input: 30 channels
- Bit input: 5 channels(6 sound groups)
- A multi-functional product that can use an SD card for MP3 playback
- Please refer to [Sound pattern and combination for multifunctional product] on this catalogue for channel input setting.

### Features per modelst

	STNDL/STND100 STND125(MP3)	STNDL-N/STND100-N STND125-N (standard unit)	Column
Support SD card(MP3)	O	X	
Support 30 built-in sounds	O	O	
Play mode	O	X	
Bit/Binary input	O	O	Please refer to sound setup switch manual parts

### STNDL / STND100,125(MP3)


- User defined 30 sounds
- 30 built-in sounds

### STNDL-N / STND100,125-N (standard unit)

- 30 built-in sounds

### Multifunctional Type

- Standard unit does not support either SD card or Play mode.



- 1 Switch for Sound Selection
- 2 SD Card Slot
- 3 for MP3
- 4 Switch for Volume Adjustment

### User-defined sound(MP3)

- User-defined sound(MP3) type



Customer can create a playlist and grouping conveniently through PC. Product supports up to 32Gbyte. SD Card is an optional item.

# STND Series



STND Series



STND series has a front control panel for convenient sound signal control.

## STNDL / STNDLF LED Steady/Flashing Tower Light & Electric Horn

Model number	Layer	Voltage	Current	Sound Pattern and volume	Certificates	Weight	Color
STNDL Steady  STNDLF Steady/ Flashing	1	DC12V	0.440A	·WS-Warning sound ·WP-Special warning sound 1st group ·WM-Melody ·WA-Alarm ·WO-Special warning sound 2nd group ·WN-Special warning sound 3rd group  ·Bit Input: 5Ch ·Binary Input: 30Ch ·Built-in sounds : Max.105dB (Based on WS-Ch5) ·MP3: Max.98dB	CE	1.19kg	● R-Red
		DC24V	0.375A			1.19kg	
		AC110V -220V	Max. 0.170A			1.58kg	
	2	DC12V	0.565A			1.43kg	● R-Red ● A-Amber ● G-Green
		DC24V	0.440A			1.43kg	
		AC110V -220V	Max. 0.205A			1.82kg	
	3	DC12V	0.650A			1.67kg	● R-Red ● A-Amber ● G-Green
		DC24V	0.500A			2.06kg	
		AC110V -220V	Max. 0.230A			2.06kg	
	4	DC12V	0.760A			1.91kg	● R-Red ● A-Amber ● G-Green ● B-Blue
		DC24V	0.555A			1.91kg	
		AC110V -220V	Max. 0.255A			2.30kg	
	5	DC12V	0.845A			2.15kg	● R-Red ● A-Amber ● G-Green ● B-Blue ○ W-White
		DC24V	0.620A			2.15kg	
		AC110V -220V	Max. 0.285A			2.54kg	


- Lens colors are interchangeable
- Ambient operating temperature: -30°C to +50°C

※ CE 인증: DC24V, AC110/220V



※ When playing MP3 files, there may be difference of volume depending on user's audio file type.

### Technical Diagram

Units: mm

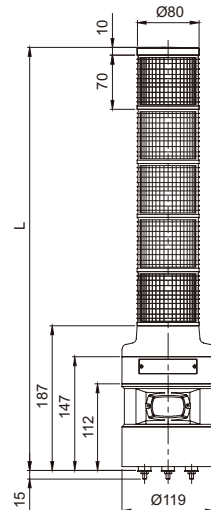

LAYER	L
1	267
2	337
3	407
4	477
5	547

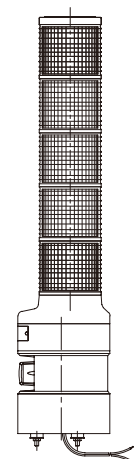

### Wiring Instructions


- External power line  
UL1015 AWG18(0.75sq) x 2C 400mm
- External signal line  
UL1007 AWG22(0.3sq) 400mm
- This product can be wired regardless of polarity.

### Ordering Specification


STNDL	-	3	-	24	-	RAG	-	INSD
[Model number]		[Layer]		[Voltage]		[Color]		[Including SD card]
STNDL STNDLF		1-1Layer 2-2Layers 3-3Layers 4-4Layers 5-5Layers		12-DC12V 24-DC24V 110/220-AC110V-220V		● R-Red ● A-Amber ● G-Green ● B-Blue ○ W-White		(None)-Without SD card INSD-Including SD card

## Wiring Instructions


### ·STNDL-DC/AC(Steady)

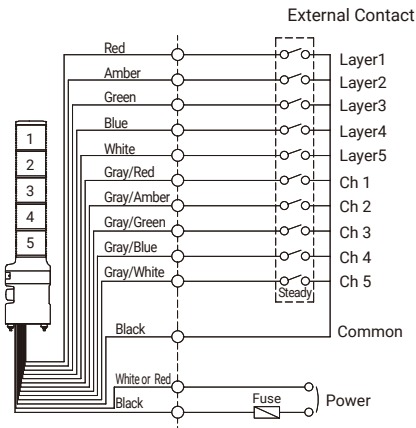


### ·STNDLF-DC/AC(Steady/Flashing)

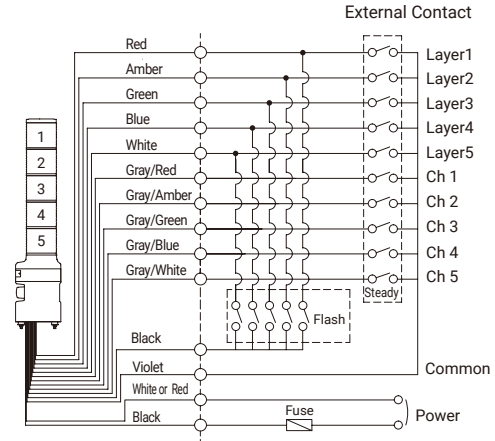

### ·STNDL-DC/AC(Steady)

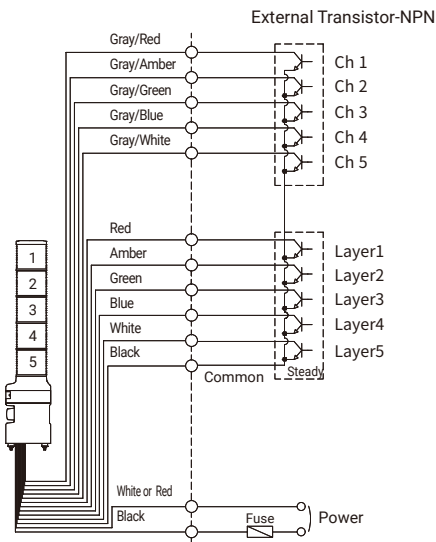

### ·STNDLF-DC/AC(Steady/Flashing)

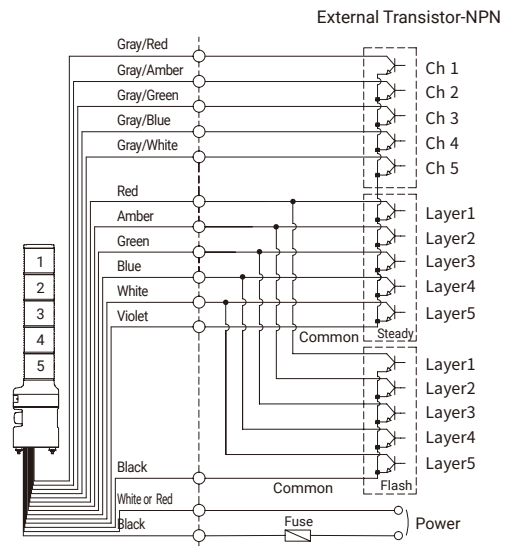

- This product can be wired regardless of polarity.
- In case of Bit input, 5 sound tones can be played. For Binary input, 30 sound tones can be played.
- ※ Please refer to [Sound pattern and combination for multifunctional product] on this catalogue for channel input setting (Wiring instruction is replaced to channel selection switch)



Do not apply a voltage to each signal line. It may cause damage to the product

- NPN transistor(non-external contact control) can be enabled by using the flashing common line for the light source.
- Each unit's light source and signal sound do not operate identically even though multiple units are working at the same time.
- Do not short-circuit between steady common and flash common. Signal light won't work properly.