

SRC1 Series Single-Phase, Slim Detachable Heatsink Type SSR

Single-Phase, Slim Detachable Heatsink Type SSR

■ Features

- Dielectric strength: 4000 VAC (also 2,500VAC model)
- Slim, compact size (22.5 mm width)
- High heat dissipation efficiency with ceramic PCB
- Zero cross turn-on, random turn-on models available
- Input Indicator (green LED)

⚠ Please read "Safety considerations" in operation manual before using.



■ Ordering Information

SRC **1** - **1** **2** **15** **□** - **N**

Item	Control phase	Rated input voltage	Rated load voltage	Rated load current (resistive load)	Function	Version	
						N	New
						No Mark	Zero cross turn-on
					R		Random turn-on
				15			15A
				20			20A
				30			30A
			2				24-240VAC
			4				48-480VAC
		1					4-30VDC
		4					90-240VAC
		1					Single-phase
		SRC					Solid State Relay (slim type)

Model	Rated input voltage	Rated load voltage	Rated input current	Function
SRC1-1215-N	4-30VDC	15A	24-240VAC	Zero cross turn-on
SRC1-4215-N	90-240VAC			
SRC1-1220-N	4-30VDC	20A		
SRC1-4220-N	90-240VAC			
SRC1-1230-N	4-30VDC	30A	48-480VAC	Zero cross turn-on
SRC1-4230-N	90-240VAC			
SRC1-1420	4-30VDC	20A		
SRC1-4420	90-240VAC			
SRC1-1420R	4-30VDC			Random turn-on

■ Specifications

○ Input

● SRC1-□□□□-N

Rated input voltage range		4-30VDC	90-240VACrms~ (50/60Hz)
Allowable input voltage range		4-32VDC	85-264VACrms~ (50/60Hz)
Max. input current		18mA	18mArms (240VACrms~)
Pick-up voltage		Min. 4VDC	Min. 85VACrms~
Drop-out voltage		Max. 1VDC	Max. 10VACrms~
Turn-on time	Zero cross turn-on	Max. 0.5 cycle of load source + 1ms	Max. 2 cycle of load source + 1ms
Turn-off time		Max. 0.5 cycle of load source + 1ms	Max. 2 cycle of load source + 1ms

● SRC1-□□□□

Rated input voltage range		4-30VDC	90-240VACrms~ (50/60Hz)
Allowable input voltage range		4-32VDC	85-264VACrms~ (50/60Hz)
Max. input current		9mA (Zero cross turn-on), 13mA (Random turn-on)	7mArms (240VACrms~)
Pick-up voltage		Min. 4VDC	Min. 85VACrms~
Drop-out voltage		Max. 1VDC	Max. 10VACrms~
Turn-on time	Zero cross turn-on	Max. 0.5 cycle of load source + 1ms	Max. 1.5 cycle of load source + 1ms
Turn-on time	Random turn-on	Max. 1ms	—
Turn-off time		Max. 0.5 cycle of load source + 1ms	Max. 1.5 cycle of load source + 1ms

(A)	Photoelectric Sensors
(B)	Fiber Optic Sensors
(C)	Door/Area Sensors
(D)	Proximity Sensors
(E)	Pressure Sensors
(F)	Rotary Encoders
(G)	Connectors/ Connector Cables/ Sensor Distribution Boxes/Sockets
(H)	Temperature Controllers
(I)	SSRs / Power Controllers
(J)	Counters
(K)	Timers
(L)	Panel Meters
(M)	Tacho / Speed / Pulse Meters
(N)	Display Units
(O)	Sensor Controllers
(P)	Switching Mode Power Supplies
(Q)	Stepper Motors & Drivers & Controllers
(R)	Graphic/ Logic Panels
(S)	Field Network Devices
(T)	Software

SRC1 Series

■ Specifications

○ Output

Rated load voltage range		24-240VACrms~ (50/60Hz)			48-480VACrms~ (50/60Hz)
Allowable load voltage range		24-264VACrms~ (50/60Hz)			48-528VACrms~ (50/60Hz)
Rated load current	Resistive load (AC-51)*1	15Arms	20Arms	30Arms	20Arms
Min. load current		0.15Arms	0.2Arms	0.5Arms	0.5Arms
Max. 1 cycle surge current (60Hz)		160A	250A	400A	300A
Max. non-repetitive surge current (I²t, t=8.3ms)		130A²s	300A²s	910A²s	350A²s
Peak voltage (non-repetitive)		600V			1200V (zero cross turn-on), 1000V (random turn-on)
Leakage current (Ta=25°C)		Max. 10mArms (240VAC~/60Hz)			Max. 10mArms (480VAC~/60Hz)
Output on voltage drop[Vpk] (Max. load current)		Max. 1.6V			
Static off-state dv/dt		500V/μs			

*1: AC-51 is utilization category at IEC60947-4-3.

○ General Specifications

Dielectric strength (Vrms)		• SRC1-□□□□-N: 2500VAC~ 50/60Hz 1 min (Input-Output, Input/Output-Case) • SRC1-□□□□: 4000VAC~ 50/60Hz 1 min (Input-Output, Input/Output-Case)	
Insulation resistance		Over 100MΩ (at 500VDC Megger) (Input-Output, Input/Output-Case)	
Indicator		Input indicator: Green LED	
Vibration	Mechanical	0.75mm amplitude at frequency of 10 to 55Hz (for 1 min) in each X, Y, Z direction for 1 hour	
	Malfunction	0.5mm amplitude at frequency of 10 to 55Hz (for 1 min) in each X, Y, Z direction for 10 min	
Shock	Mechanical	300m/s ² (approx. 30G) in each X, Y, Z direction for 3 times	
	Malfunction	100m/s ² (approx. 30G) in each X, Y, Z direction for 3 times	
Environment	Ambient temp.	-30 to 80°C (in case of the rated input voltage 90-240VAC~: -20 to 70°C), storage: -30 to 100°C (The rated load current capacity is different depending on ambient temperature. Refer to ▢ SSR Derating Curve'.)	
	Ambient humi.	45 to 85%RH, storage: 45 to 85%RH	
Input terminal connection		Min. 1×0.5mm ² (1×AWG20), Max. 1×1.5mm ² (1×AWG16) or 2×1.5mm ² (2×AWG16)	
Output terminal connection		Min. 1×0.75mm ² (1×AWG18), Max. 1×4mm ² (1×AWG12) or 2×2.5mm ² (2×AWG14)	
Input terminal fixed torque		0.75 to 0.95N·m	
Output terminal fixed torque		1 to 1.35N·m	
Approval		CE cULus (except SRC1-□□□□-N)	
Weight ^{*1}		Approx. 119g (approx. 85g)	


*1: The weight includes packaging. The weight in parenthesis is for unit only.

*Environment resistance is rated at no freezing or condensation.


*For wiring the terminal, an O-ring terminal must be used.

■ Dimensions & Mounting

○ Dimensions

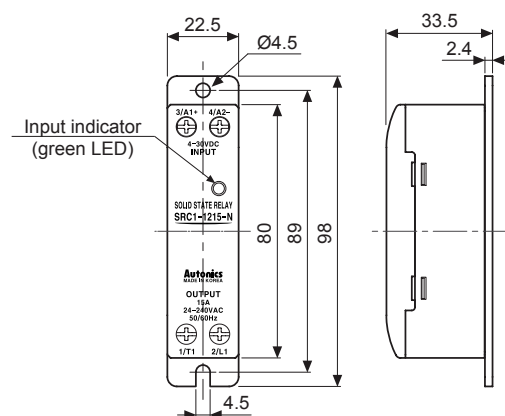


○ Hole cut-out for panel front mounting



*Screw tightening torque for mounting: 1.8 to 2.5N·m

○ Installation interval (unit: mm)

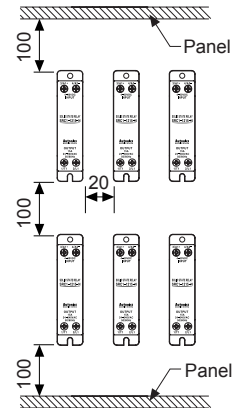


High temperature caution

Make sure do not touch the heat sink or the unit body while power is supplied or right after load power is turned off. If not, it may cause a burn.

*For mounting multiple SSR, please keep certain installation intervals for heat prevention. For horizontal installation (when the heights of input part and output part are equal), it is recommended to apply 50% of rated load current.


Single-Phase, Slim Detachable Heatsink Type SSR

■ Connections

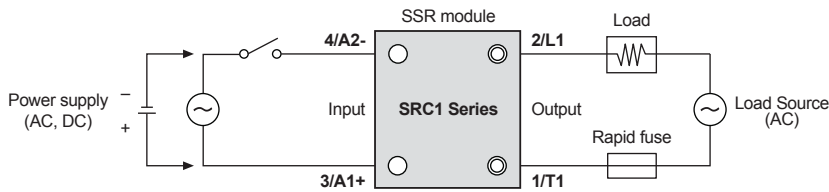


■ SSR Derating Curve


◎ SRC1-1215-N

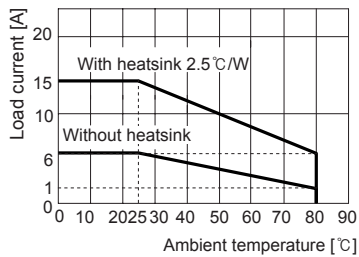


◎ SRC1-4215-N

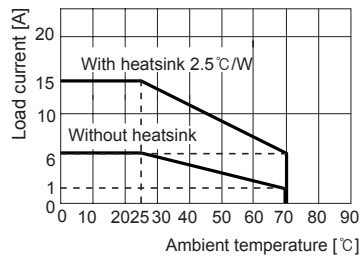


◎ SRC1-1220-N

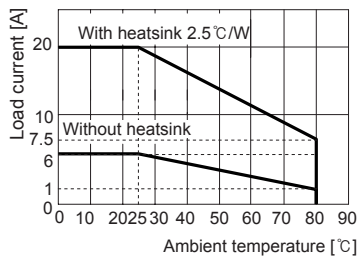


◎ SRC1-4220-N

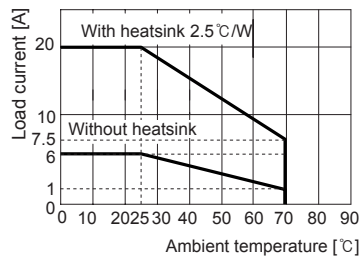


◎ SRC1-1230-N

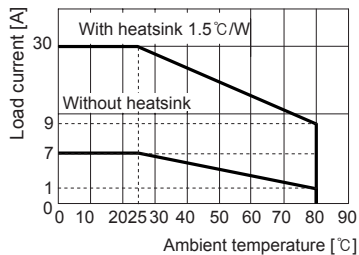


◎ SRC1-4230-N

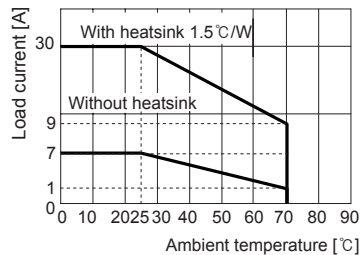

◎ SRC1-1420/1420R

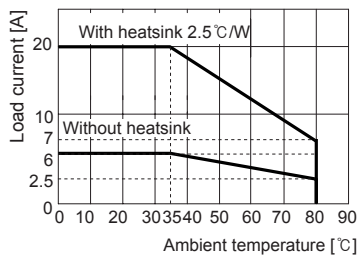

◎ SRC1-4420

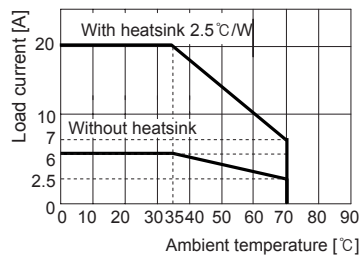

⚠ Please supply less than 50% of the rated load current when installing several SSRs closely due to decreasing effectiveness of protection against heat.

(A)	Photoelectric Sensors
(B)	Fiber Optic Sensors
(C)	Door/Area Sensors
(D)	Proximity Sensors
(E)	Pressure Sensors
(F)	Rotary Encoders
(G)	Connectors/ Connector Cables/ Sensor Distribution Boxes/Sockets
(H)	Temperature Controllers
(I)	SSRs / Power Controllers
(J)	Counters
(K)	Timers
(L)	Panel Meters
(M)	Tacho / Speed / Pulse Meters
(N)	Display Units
(O)	Sensor Controllers
(P)	Switching Mode Power Supplies
(Q)	Stepper Motors & Drivers & Controllers
(R)	Graphic/ Logic Panels
(S)	Field Network Devices
(T)	Software

■ Proper Usage



High temperature caution

Make sure do not touch the heat sink or the unit body while power is supplied or right after load power is turned off. If not, it may cause a burn.



Cautions during use

1. Attach a heatsink and ventilate for smooth convection current. If not, congested heat transfer may cause product failure or malfunction.
2. For mounting multiple SSR, please keep certain installation intervals for heat prevention. For horizontal installation (when the heights of input part and output part are equal), it is recommended to apply less than 50% of the rated load current.
3. Make sure do not touch the heatsink or the unit body while power is supplied or right after load power is turned OFF. If not, it may cause a burn.
4. Connect the proper cable for the rated load current with output terminal.
5. Use rapid fuse of which I^2t is under 1/2 of SSR I^2t in order to protect the unit from load's short-circuit current. In case of a short-circuit please replace the fuse which has same specification.
6. In case that load's current is lower than SSR min. load current, connect dummy resistance to the load in parallel so as to make load's current higher than SSR min. load current.
7. When selecting phase control with random turn-on model, install the noise filter between load and load's source
8. Make sure that the screw on output terminal is tightly fastened. Using the unit with loose bolt may cause product failure or malfunction.
9. Do not touch the load's terminal even if output is OFF. It may cause electric shock.
10. In case of 4-30VDC model, the signal input should be insulated and limited voltage/current or Class 2, SELV power supply device.
11. To attach the heatsink, use Thermal Grease as below or that of equal specification.
※Thermal Grease: GE TOSHIBA (YG6111), KANTO-KASEI (FLOIL G-600), SHINETSU (G746)
12. Avoid following environments to install this unit.
 - ① Where temperature/humidity is beyond the specification
 - ② Where dew condensation occurs due to temperature change
 - ③ Where inflammable or corrosive gas exists
 - ④ Where direct rays of light exist
 - ⑤ Where severe shock, vibration or dust exists
 - ⑥ Where near facilities generating strong magnetic forces or electric noise
13. This product may be used in the following environments.
 - ① Indoors
 - ② Max. altitude: 2,000m
 - ③ Pollution degree 2
 - ④ Installation category III