

APPLICATION

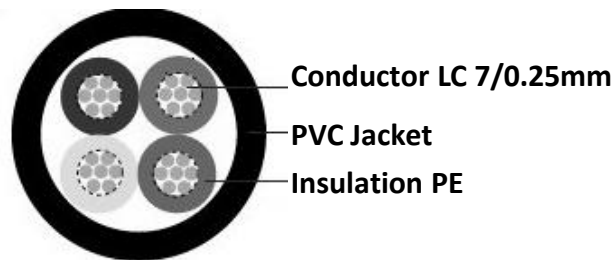
- ❖ These cables are designed for signaling and alarm systems.
- ❖ They allow the connection of contacts, detectors and sensors, infra-red as well as microwave or mixed technology systems to the switchboard

PRODUCT FACTS

- ❖ INDOOR USE

PRODUCT CODE

- ❖ ALA-XPRO-4025-LC-10

**TECHNICAL DATA**

DESCRIPTION	SPECIFICATION
<i>Physical Characteristics</i>	
Number of Cores	4
Stranding	7/0.25 mm
Conductor Overall Diameter	1.2 mm
Conductor Material	Aluminum
Thickness of Insulation	0.25mm
Insulation Material	PE
Insulation colour	White,Orange,Green,Black
Shield Aluminum Foil	None
Thickness of Jacket	0.60mm
Jacket Material	PVC
Jacket colour	White
Jacket Overall Diameter	4+/-0.25mm
Nominal Overall Diameter	4+/-0.25mm
Length	100 m/roll
Cable Weight (kg)	1.7kg
Maximum Operating Temperature (121•C)	Not showing any cracks
Maximum Conductor Resistance	Under 152.21 ohm /KM at 25•C
<i>Electrical Characteristics</i>	
Maximum Operating Voltage (V AC)	300V