

# LED GLASS TUBE

Economic and Energy Efficiency



## Features

- ◆ Up to 50% energy saving compared with fluorescents
- ◆ Excellent light transmittance and uniform light distribution
- ◆ High quality GLASS tube with eco-friendly coating
- ◆ Long lifetime up to 30,000hrs
- ◆ Easy installation
- ◆ No mercury material or UV radiation

## Benefits


- ◆ Considerably lower energy cost
- ◆ Lowering maintenance cost
- ◆ Easy and flexible installation
- ◆ Environmental friendly

## Application

- ◆ For general lighting in e.g. supermarkets, offices, hotels, residential and restaurants



## Dimension

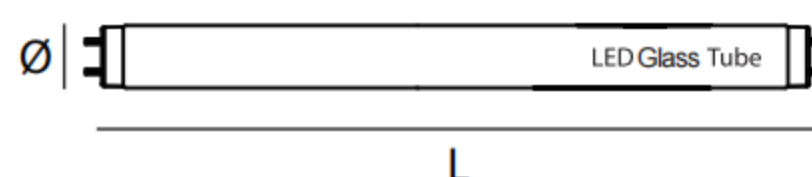

## Specification

\* Dimming not allowed, not for use with electronic ballast gear.

Model	Dimension	Lampholder	Input Voltage	Power	Lumen	Efficiency	CCT (K)	CRI	Beam Angle	Power Factor
RLASELE721023	Ø26x588	G13	200-240V 50/60Hz	9W	900lm	100lm/W	3000K	80	300	>0.90
RLASELE721024	Ø26x588	G13	200-240V 50/60Hz	9W	900lm	100lm/W	4000K	80	300	>0.90
RLASELE721026	Ø26x588	G13	200-240V 50/60Hz	9W	900lm	100lm/W	6500K	80	300	>0.90
RLASELE741823	Ø26x1198	G13	200-240V 50/60Hz	18W	1800lm	100lm/W	3000K	80	300	>0.90
RLASELE741824	Ø26x1198	G13	200-240V 50/60Hz	18W	1800lm	100lm/W	4000K	80	300	>0.90
RLASELE741826	Ø26x1198	G13	200-240V 50/60Hz	18W	1800lm	100lm/W	6500K	80	300	>0.90

\*SJ Lite reserves the right to change and amend the specification without prior notice.

### Retrofit Lamp Installation instructions:





### LED Glass Tube Lamp Installation instructions:


- (1) Switch off the power supply.
- (2) Turning the conventional lamp 90°.
- (3) Remove the conventional lamp.
- (4) Remove the conventional starter from the starter holder.
- (5) Insert the LED starter into the starter holder.
- (6) Insert the LED glass lamp into the lamp holder.
- (7) Secure it in position by turning the lamp 90°.
- (8) Switch on the power supply. (200-240V ~ 50/60Hz)

### Installation instructions:


- (1) Switch off electricity.
- (2) and (3) Remove the conventional lamp and capacitor.
- (4) and (5) Retrofit refer to wiring method diagram b:
  - a) Bypass CCG & Replace the old starter with the LED tube starter.
- (6) Insert the LED lamp into the lamp holder.
- (7) Secure it in position by turning the lamp 90°.
- (8) Switch on electricity.

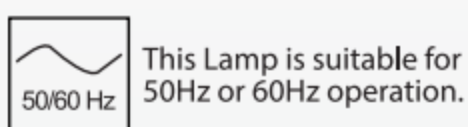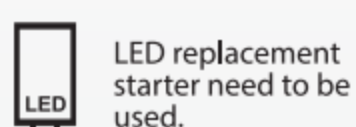

### a) The wiring method for the new fixture (Complete Fixture)

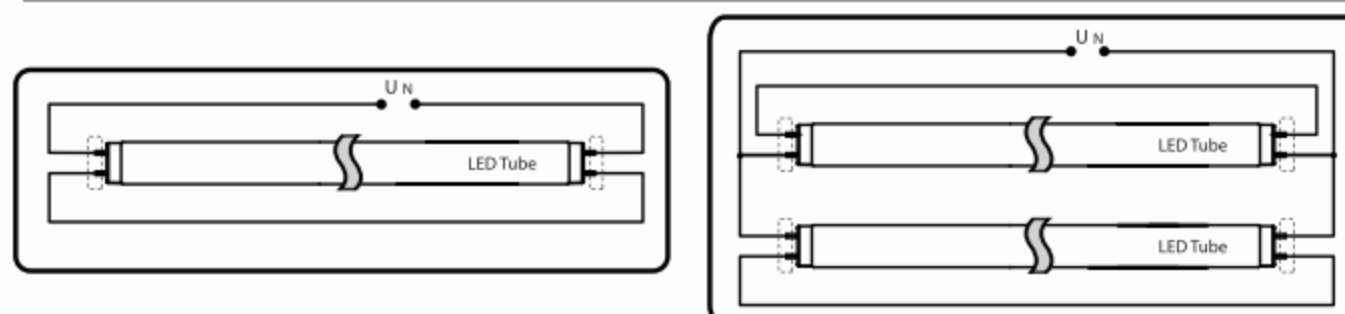

### b) The wiring method for the old fixture / Retrofit (Used more than 5 years)

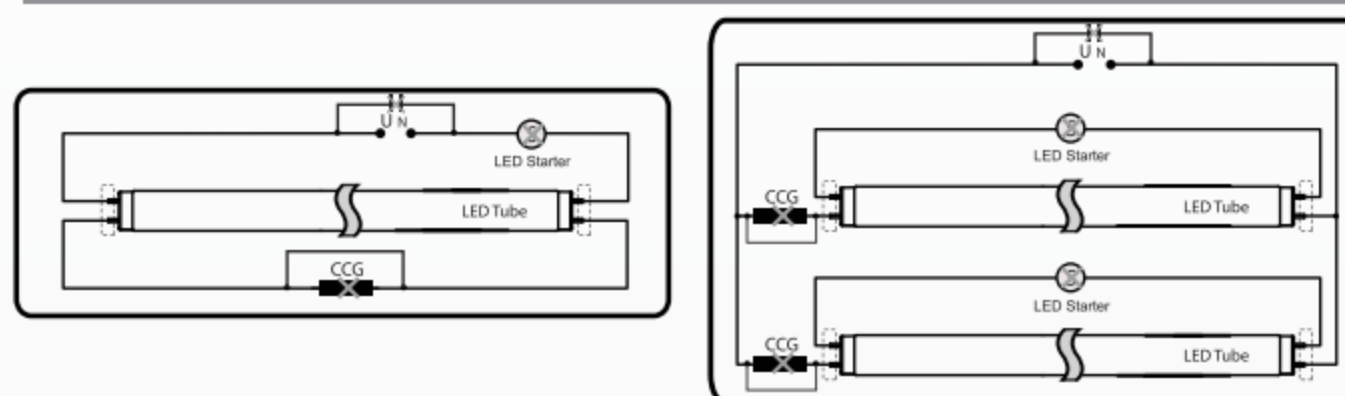

### c) The wiring method for replacing CCG

