



陽光五金有限公司


SUNLIGHT HARWARE SDN. BHD. (026380-W)

GST No: 001644265472

陽光金屬瓦有限公司

SUNLIGHT ROOFING SDN. BHD. (1241808-P)

GST No: 001714204672

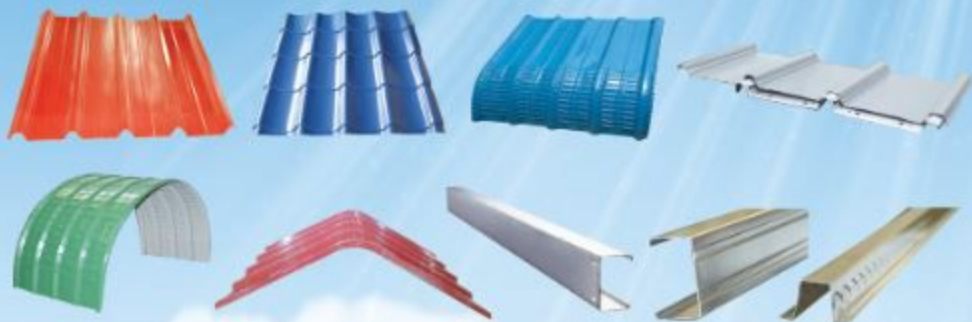

Always your right choice...



DURABILITY



COLOUR
CHOICES



ENVIRONMENT
FRIENDLY



WARRANTY



MADE IN
MALAYSIA



SIRIM



QTA



陽光

SUNLIGHT

Sunlight Hardware Sdn Bhd (626380-W)

☎ www.sunlighthardware.com

✉ sunlight_sunite@hotmail.com

Sunlight Roofing Sdn Bhd (1241808-P)

☎ www.sunlighthardware.com

✉ charmy.sunlightroofing@gmail.com

HEADQUARTERS

NO 301 AN NUSAH (RPM) BNR 4 TAMAN PERINDUSTRIAN (RPM) BNR, F. 803 LI L. TIRAM, JOHOR, MALAYSIA.

+607-893 4478 / +607-893 4368 / +607-893 5923 / +6016-715 6720 ☎ 607-893 3452

KOTA TINGGI BRANCH

6&3 JALAN EMALJUAN 3, TAMAN PERINDUSTRIAN KOTA TINGGI, 81000 KOTA TINGGI, JOHOR.

☎ +607-893 1172 / 48277 338 3181

☎ +607-893 1172

Company Profile

Sunlight Awning and Decoration Enterprise was formed since 1987 founded by Mr. Michael Lee. He embarks his journey doing mainly supply and install specialize in metal roofing, polycarbonate and steel structure projects. Due to high demand, the business has grown to become a retailer for building construction materials.

In 2013, he started Sunlight Hardware Sdn. Bhd as a retailer and supplier for building construction material to enhance our products availability to our clients. Due to strong support from our clients, we are able expand the upstream business into manufacturer producing various steel products.

Today, Sunlight Hardware Sdn. Bhd has 2 manufacturing plants in Johor owning more than 20 rollforming machines. The number of workers has been increased to more than 60 workers. In order to provide the best services to our customers, Sunlight Hardware Sdn. Bhd owned more than 10 lorries for logistic purposes (including 100 feet trailer).

In recent years, Sunlight Steel Sdn.Bhd and Sunlight Roofing Sdn. Bhd has formed to continuously to provide our best services to our client as a "One Stop Solution" reliable supplier and contractor"



Head Office :

No. 1A, Jalan Indah Gemilang 4,
Taman Perindustrian Gemilang,
81800 Ulu Tiram, Johor
E : sunlight_sulite@hotmail.com
T : 07 863 4478
F : 07 863 3452



Branch Office :

No. 6 & 8, Jalan Kemajuan 3,
Taman Perindustrian Kota Tinggi,
81800 Kota Tinggi, Johor
E : sunlighthardware@gmail.com
T & F : 07 883 7172


Certifications





SUNLIGHT CLIP LOCK 710

DIMENSION :



TECHNICAL SPECIFICATION: AVAILABLE THICKNESS


| Base/ Metal Thickness (DWT) (mm) | Total Coated Thickness (TCT) (mm) | Mass per Unit Area (kg/m ²) | Mass per Unit Length (kg/m) | Coverage (m ² /tonne) | Minimum Yield Strength (MPa) |
|----------------------------------|-----------------------------------|---|-----------------------------|----------------------------------|------------------------------|
| 0.35 | 0.40 | 3.77 | 2.67 | 265 | 550 |
| 0.40 | 0.47 | 4.48 | 3.18 | 223 | 550 |
| 0.45 | 0.53 | 5.08 | 3.61 | 197 | 550 |

MAXIMUM RECOMMENDED SPACING OF SUPPORTS

| Total Coated Thickness (TCT) (mm) | ROOFS | | | WALLS | | | MAXIMUM ROOF OVERHANG UNSTIFFENED (mm) | MAXIMUM ROOF OVERHANG STIFFENED (mm) |
|-----------------------------------|------------------|---------------|--------------------|------------------|---------------|--------------------|--|--------------------------------------|
| | Single Span (mm) | End Span (mm) | Internal Span (mm) | Single Span (mm) | End Span (mm) | Internal Span (mm) | | |
| 0.47 | 1600 | 1700 | 2200 | 2400 | 2400 | 2400 | 150 | 350 |
| 0.53 | 3000 | 2300 | 2800 | 2400 | 2400 | 2400 | 200 | 400 |


- LENGTHS** : All products can be available to the custom cut up to your length requirements. For lengths longer than 21 metres, roll on site can be arranged.
- TOLERANCES** : Length ± 5 mm
Thickness ± 0.03 mm
Cover Width ± 4 mm
- RECOMMENDED PITCH** : Minimum 3° Roof Pitch at up to 52 meter length with 350mm/hr rainfall intensity.
- Notes** : All products subject to stock availability.

GENERAL INSTALLATION GUIDE

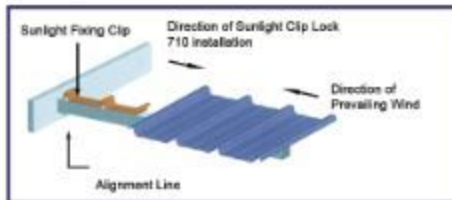


1. Sunlight Fixing Clip

The fixing clips must be aligned longitudinally onto the purlins. The clips fixing direction sheets oppose the prevailing wind direction.

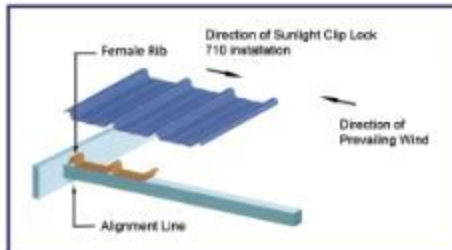


2. Laying of 1st Sunlight Clip Lock Roofing Sheet

Position the first sheet of Sunlight Clip Lock over the fixing clips, apply pressure on the centre of the ribs. The roofing sheets is then locked onto the fixing clip. Ensure the female rib facing the edge of the roof.

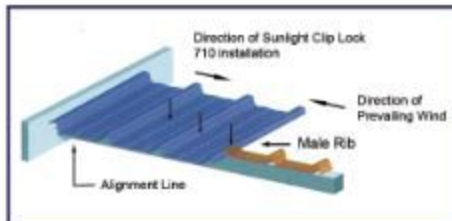

3. Second Fixing Clip Installation

The next fixing clip is then fastened on the purlins with the male portion of the clips holding down the male rib of the roof sheet securely.

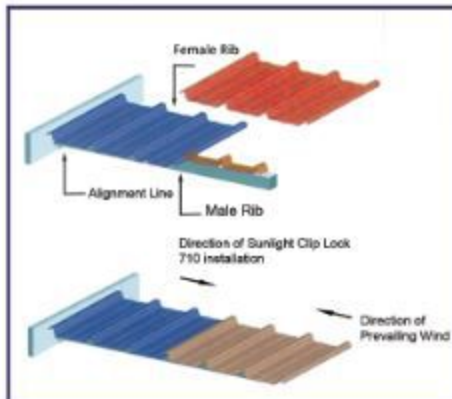


4. Subsequent Sunlight Clip Lock Roofing Sheet

The next roofing sheet is then placed over the fixing clip with the female rib of the roof sheet covering the male rib of the previous sheet. Use alignment wire to ensure the roof sheets aligned laterally, parallel to the eave purlins.




5. Continue Process of Installation


Repeat Step 3 and 4 until the roof area is fully covered. The pan of final roofing sheet shall be cut longitudinally if the space between the last sheet and the edge is more than one third (1/3) of the width of sheet. The roof finishing install with flashing and capping.

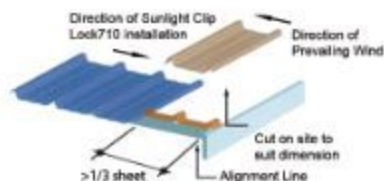

6. Ending Pieces Recommendation


For the space between the last sheet and the edge that less than one third (1/3) of the width of the sheet, the final sheet will be secured down with a cut off (1/3) fixing clips. The roof finishing install with flashing and capping.

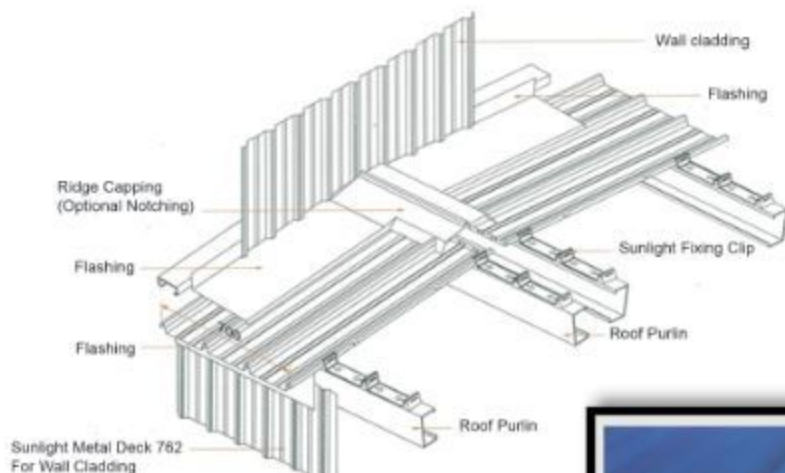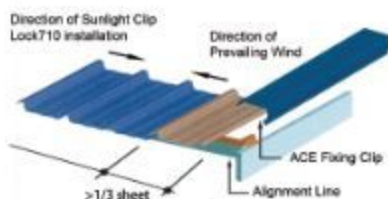

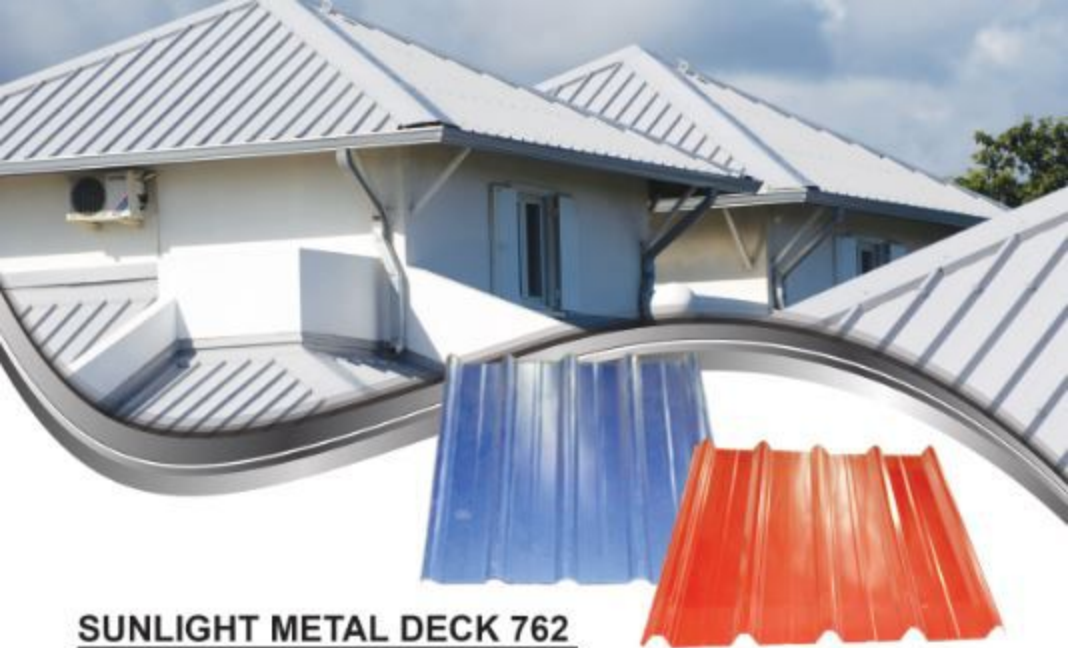

SUNLIGHT METAL DECK 762

DIMENSION :

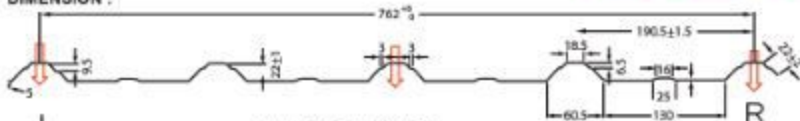

AVAILABLE THICKNESS

TECHNICAL SPECIFICATION

| Based Metal Thickness (BMT) (mm) | Total Coated Thickness (TCT) (mm) | Mass per Unit Area (kg/m ²) | Mass per Unit Length (kg/m) | Coverage (m ² /tonne) | Minimum Yield Strength (MPa) |
|----------------------------------|-----------------------------------|---|-----------------------------|----------------------------------|------------------------------|
| 0.20 | 0.25 | 2.02 | 1.54 | 650 | 550 |
| 0.25 | 0.30 | 2.60 | 1.98 | 385 | 550 |
| 0.30 | 0.35 | 3.05 | 2.32 | 328 | 550 |
| 0.35 | 0.40 | 3.45 | 2.63 | 290 | 550 |
| 0.42 | 0.47 | 4.25 | 3.24 | 235 | 550 |
| 0.48 | 0.53 | 4.76 | 3.63 | 210 | 550 |

Maximum Recommended Spacing Of Supports

| Total Coated Thickness (TCT) (mm) | ROOFS | | WALLS | | MAXIMUM ROOF OVERHANG UNSTIFFED (mm) |
|-----------------------------------|---------------|--------------------|---------------|--------------------|--------------------------------------|
| | End Span (mm) | Internal Span (mm) | End Span (mm) | Internal Span (mm) | |
| 0.40 | 900 | 1000 | 1200 | 1500 | 100 |
| 0.47 | 1200 | 1500 | 1700 | 2000 | 150 |
| 0.53 | 1300 | 1700 | 2000 | 2300 | 200 |


LENGTHS : All products can be available to the custom-cut up to your length requirements. For lengths longer than 21 metres, roll on site can be arranged.

TOLERANCES : Length ±5mm
Thickness ±0.03mm
Cover Width ±4mm


RECOMMENDED PITCH : Minimum 5° Roof Pitch at up to 13 meter length with 350mm/hr rainfall intensity.

Note : All products subject to stock availability.

SUNLIGHT CRIMP CURVE PROFILES




CRIMP CURVE




ARC


SINGLE CRIMP PROFILE



Curved Variable Degree



Curved 90 Unequal End Lengths

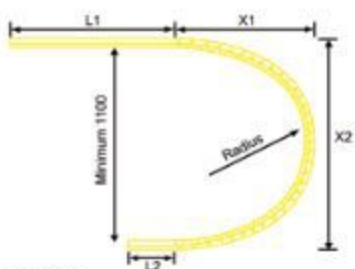

Semi-Circle


Notes

1. Minimum Radius Curve is 300mm inside of the sheet.
2. Minimum length of the sheet, L1 or L2 must be 13mm.
3. Maximum length of the straight sheet is approximately 13m.
4. All products subject to stock availability.



SUNLIGHT EUROTILE

DIMENSION :

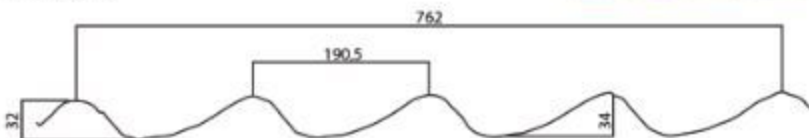

AVAILABLE THICKNESS :

| Based Metal Thickness (BMT) (mm) | Total Coated Thickness (TCT) (mm) | Mass per Unit Area (kg/m ²) | Mass per Unit Length (kg/m) |
|----------------------------------|-----------------------------------|---|-----------------------------|
| 0.30 | 0.35 | 3.38 | 2.58 |
| 0.35 | 0.40 | 4.09 | 3.13 |
| 0.42 | 0.47 | 4.50 | 3.43 |
| 0.48 | 0.53 | 5.09 | 3.88 |




Side lapping details

LENGTHS : All products can be available to the custom-cut up to your length requirements. For lengths longer than 21 metres, roll on site can be arranged.


TOLERANCES : Length $\pm 5\text{mm}$
 Thickness $\pm 0.03\text{mm}$
 Cover Width $\pm 4\text{mm}$

RECOMMENDED PITCH : Minimum 8 °Roof Pitch.
 Note All products subject to stock availability

SUNLIGHT LIGHTWEIGHT TRUSS AND BATTEN




SUNLIGHT C SECTION




| Height (mm) | Width (mm) | Total Coating Thickness (TCT) (mm) | Mass Per Unit Length (Kg/m) | Available Coating | Steel Grade (Mpa) | Colour Availability |
|-------------|------------|------------------------------------|-----------------------------|--|-------------------|---------------------|
| 75 | 37 | 0.75 | 0.903 | Galvanised Iron (Z180), Aluminium-Zinc (AZ150) | 550 | G.I, Blue, Brown |
| 75 | 37 | 0.8 | 1 | Galvanised Iron (Z180), Aluminium-Zinc (AZ150) | 550 | G.I, Blue, Brown |
| 75 | 37 | 1.0 | 1.2 | Galvanised Iron (Z180), Aluminium-Zinc (AZ150) | 550 | G.I, Blue, Brown |

SUNLIGHT BATTEN 'KECIL' (Truss Kecil)





| Height (mm) | Width (mm) | Total Coating Thickness (TCT) (mm) | Mass Per Unit Length (Kg/m) | Available Coating | Steel Grade (Mpa) | Colour Availability |
|-------------|------------|------------------------------------|-----------------------------|--|-------------------|---------------------|
| 33 | 25 | 0.45 | 0.38 | Galvanised Iron (Z180), Aluminium-Zinc (AZ150) | 550 | G.I, Blue, Brown |
| 33 | 25 | 0.47 | 0.40 | Galvanised Iron (Z180), Aluminium-Zinc (AZ150) | 550 | G.I, Blue, Brown |
| 33 | 25 | 0.50 | 0.42 | Galvanised Iron (Z180), Aluminium-Zinc (AZ150) | 550 | G.I, Blue, Brown |

SUNLIGHT BATTEN 'BESAR' (Truss Besar)



| Height (mm) | Width (mm) | Total Coating Thickness (TCT) (mm) | Mass Per Unit Length (Kg/m) | Available Coating | Steel Grade (Mpa) | Colour Availability |
|-------------|------------|------------------------------------|-----------------------------|--|-------------------|---------------------|
| 42 | 33 | 0.45 | 0.48 | Galvanised Iron (Z180), Aluminium-Zinc (AZ150) | 550 | G.I, Blue, Brown |
| 42 | 33 | 0.47 | 0.50 | Galvanised Iron (Z180), Aluminium-Zinc (AZ150) | 550 | G.I, Blue, Brown |
| 42 | 33 | 0.50 | 0.53 | Galvanised Iron (Z180), Aluminium-Zinc (AZ150) | 550 | G.I, Blue, Brown |
| 42 | 33 | 0.75 | 0.80 | Galvanised Iron (Z180), Aluminium-Zinc (AZ150) | 550 | G.I, Blue, Brown |

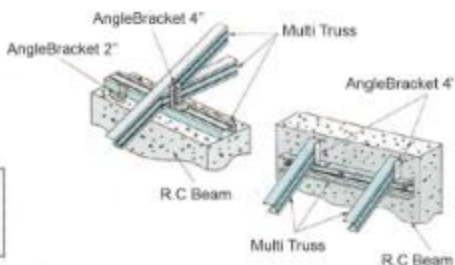


Angle Bracket

| | |
|------|-----------|
| Size | 100X48X48 |
| Size | 48X48X48 |

Note : All products subject to stock availability. Thickness tolerance $\pm 0.03\text{mm}$.


GENERAL INSTALLATION GUIDE

GENERAL TRUSS JOINING METHOD

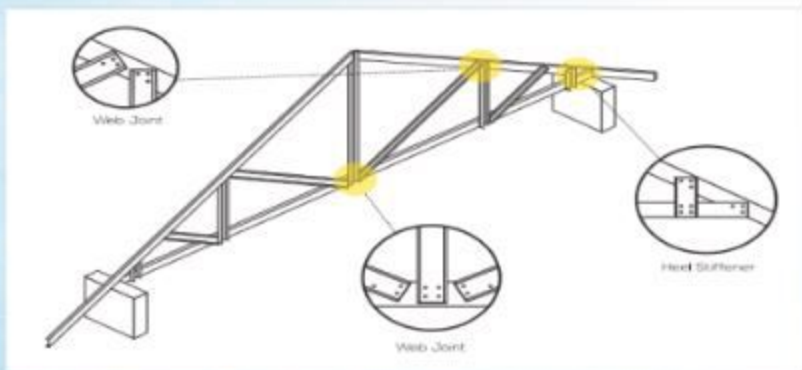


OVERLAPPING

TILE ROOF

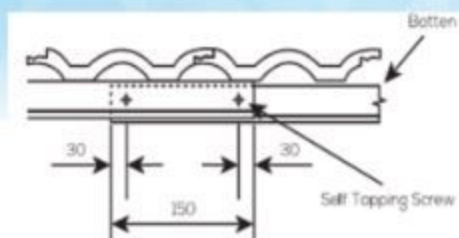


PROFILE METAL SHEET

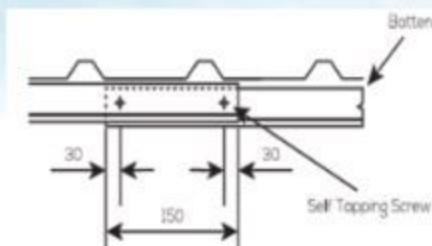


Batten overlaps are recommended to be 150mm in length

FIXINGS




Pairs of screws must be fixed in line.
Offset must be avoided.

BOX UPS



The C-Shaped Steel truss section boxed up provides extra strength, design flexibility, and wider spans.

SUNLIGHT C PURLINS



H = Height , W = Width , C = Lipped

| CODE | Height, H (mm) | Width, W (mm) | Thickness (mm) | Lipped (mm) | Mass per Unit Length (Kg/m) | x (mm) | y (mm) | I _{xx} 10 ³ mm ⁴ | I _{yy} 10 ³ mm ⁴ | I _{xy} 10 ³ mm ⁴ | I _{xx} 10 ³ mm ⁴ | I _{yy} 10 ³ mm ⁴ | R _{xx} mm | R _{yy} mm |
|--------|----------------|---------------|----------------|-------------|-----------------------------|--------|--------|---|---|---|---|---|--------------------|--------------------|
| C7516 | 75 | 45 | 1.6 | 16 | 2.35 | 17.5 | 37.5 | 0.274 | 0.09 | 6.373 | 3.262 | 30.262 | 17.323 | |
| C7520 | 75 | 45 | 2.0 | 16 | 2.94 | 17.5 | 37.5 | 0.337 | 0.011 | 8.987 | 0.400 | 30.111 | 17.170 | |
| C7525 | 75 | 45 | 2.5 | 16 | 3.54 | 17.5 | 37.5 | 0.413 | 0.135 | 11.1 | 4.43 | 30.14 | 16.97 | |
| C10016 | 100 | 50 | 1.6 | 16 | 2.82 | 17.6 | 50 | 0.572 | 0.128 | 11.440 | 3.951 | 40.16 | 19.000 | |
| C10020 | 100 | 50 | 2.0 | 16 | 3.47 | 17.6 | 50 | 0.706 | 0.156 | 14.120 | 4.815 | 40.002 | 18.824 | |
| C10025 | 100 | 50 | 2.5 | 16 | 4.40 | 17.6 | 50 | 0.858 | 0.19 | 17.360 | 5.854 | 39.81 | 18.631 | |
| C12516 | 125 | 50 | 1.6 | 16 | 3.14 | 15.9 | 62.5 | 0.96 | 0.138 | 15.360 | 4.047 | 49.314 | 18.693 | |
| C12520 | 125 | 50 | 2.0 | 16 | 3.87 | 15.9 | 62.5 | 1.187 | 0.169 | 18.992 | 4.956 | 49.153 | 18.534 | |
| C12525 | 125 | 50 | 2.5 | 16 | 4.89 | 15.9 | 62.5 | 1.462 | 0.205 | 23.392 | 6.012 | 48.951 | 18.337 | |
| C15016 | 150 | 65 | 1.6 | 16 | 3.85 | 20.1 | 75 | 1.737 | 0.275 | 23.160 | 6.125 | 59.958 | 23.872 | |
| C15020 | 150 | 65 | 2.0 | 16 | 4.77 | 20.1 | 75 | 2.149 | 0.338 | 28.635 | 7.528 | 59.794 | 23.712 | |
| C15025 | 150 | 65 | 2.5 | 16 | 5.91 | 20.2 | 75 | 2.654 | 0.413 | 35.387 | 9.213 | 59.590 | 23.513 | |
| C15030 | 150 | 65 | 3.0 | 16 | 7.45 | 20.2 | 75 | 3.356 | 0.528 | 43.100 | 10.340 | 59.510 | 23.210 | |
| C17516 | 175 | 75 | 1.6 | 16 | 4.41 | 22.4 | 87.5 | 2.72 | 0.409 | 31.086 | 7.776 | 70.018 | 27.164 | |
| C17520 | 175 | 75 | 2.0 | 16 | 5.54 | 22.4 | 87.5 | 3.372 | 0.504 | 38.537 | 9.582 | 69.851 | 27.002 | |
| C17525 | 175 | 75 | 2.5 | 16 | 6.89 | 22.4 | 87.5 | 4.171 | 0.618 | 47.669 | 11.749 | 69.643 | 26.801 | |
| C17530 | 175 | 75 | 3.0 | 16 | 8.57 | 22.4 | 87.5 | 5.286 | 0.790 | 58.20 | 13.69 | 69.56 | 26.70 | |
| C20016 | 200 | 75 | 1.6 | 16 | 4.76 | 20.9 | 100 | 3.702 | 0.427 | 37.02 | 7.893 | 78.885 | 26.785 | |
| C20020 | 200 | 75 | 2.0 | 16 | 5.90 | 21.0 | 100 | 4.592 | 0.525 | 45.92 | 9.722 | 78.714 | 26.622 | |
| C20025 | 200 | 75 | 2.5 | 16 | 7.39 | 21.0 | 100 | 5.685 | 0.644 | 56.85 | 11.926 | 78.5 | 26.419 | |
| C20030 | 200 | 75 | 3.0 | 16 | 9.15 | 21.0 | 100 | 7.191 | 0.830 | 69.300 | 13.910 | 78.430 | 26.320 | |
| C25016 | 250 | 75 | 1.6 | 16 | 5.38 | 18.5 | 125 | 6.236 | 0.455 | 49.888 | 8.053 | 96.12 | 25.975 | |
| C25020 | 250 | 75 | 2.0 | 16 | 6.59 | 18.6 | 125 | 7.742 | 0.56 | 61.936 | 9.923 | 95.939 | 25.811 | |
| C25025 | 250 | 75 | 2.5 | 16 | 8.35 | 18.6 | 125 | 9.596 | 0.687 | 76.768 | 12.181 | 95.713 | 25.607 | |
| C25030 | 250 | 75 | 3.0 | 16 | 10.35 | 18.6 | 125 | 11.987 | 0.875 | 95.60 | 15.70 | 95.30 | 26.33 | |
| C30016 | 300 | 100 | 1.6 | 16 | 6.75 | 24.9 | 150 | 11.526 | 0.998 | 76.84 | 13.289 | 117.074 | 34.445 | |
| C30020 | 300 | 100 | 2.0 | 16 | 8.51 | 24.9 | 150 | 14.334 | 1.23 | 95.427 | 16.378 | 116.869 | 34.261 | |
| C30025 | 300 | 100 | 2.5 | 16 | 10.60 | 24.9 | 150 | 17.746 | 1.511 | 118.307 | 20.147 | 116.613 | 34.032 | |
| C30030 | 300 | 100 | 3.0 | 16 | 12.71 | 24.9 | 150 | 21.703 | 1.879 | 147.00 | 27.89 | 116.82 | 35.76 | |

Note : All products subject to stock available. Thickness tolerance ± 1.0 mm.


The purlin load table are derived in a accordance to BS5950 : Part 5 : 1987 "Code of Practice for Design of Cold Formed Section" with maximum roof pitch 30° and roofing sheet distributed load 6.55kg/m²

| CODE | Purlin Spacing (m) | | | | | |
|--------|--------------------|------|------|------|------|------|
| | 0.9 | 1.2 | 1.5 | 1.8 | 2.1 | 2.4 |
| C7516 | 4.3 | 3.9 | 3.6 | 3.4 | 3.3 | 3.1 |
| C7520 | 4.5 | 4.1 | 3.9 | 3.7 | 3.5 | 3.3 |
| C7525 | 4.7 | 4.3 | 4.1 | 3.9 | 3.7 | 3.5 |
| C10016 | 5.4 | 5.0 | 4.6 | 4.4 | 4.2 | 4.0 |
| C10020 | 5.8 | 5.3 | 4.9 | 4.7 | 4.4 | 4.3 |
| C10025 | 6.1 | 5.6 | 5.2 | 5 | 4.7 | 4.5 |
| C12516 | 6.4 | 5.9 | 5.5 | 5.2 | 4.9 | 4.7 |
| C12520 | 6.8 | 6.3 | 5.8 | 5.5 | 5.3 | 5.1 |
| C12525 | 7.2 | 6.7 | 6.2 | 5.9 | 5.6 | 5.4 |
| C15016 | 7.7 | 7.1 | 6.6 | 6.3 | 6.0 | 5.7 |
| C15020 | 8.2 | 7.6 | 7.1 | 6.7 | 6.4 | 6.1 |
| C15025 | 8.7 | 8.0 | 7.5 | 7.1 | 6.8 | 6.5 |
| C15030 | 8.9 | 8.2 | 7.7 | 7.2 | 7.0 | 6.7 |
| C17516 | 9.0 | 8.2 | 7.7 | 7.3 | 6.9 | 6.7 |
| C17520 | 9.5 | 8.8 | 8.2 | 7.8 | 7.4 | 7.1 |
| C17525 | 10.1 | 9.3 | 8.7 | 8.3 | 7.9 | 7.6 |
| C17530 | 10.3 | 9.5 | 8.9 | 8.5 | 8.1 | 7.8 |
| C20016 | 9.9 | 9.1 | 8.5 | 8.0 | 7.7 | 7.4 |
| C20020 | 10.5 | 9.7 | 9.1 | 8.6 | 8.2 | 7.9 |
| C20025 | 11.1 | 10.2 | 9.6 | 9.1 | 8.7 | 8.4 |
| C20030 | 11.3 | 10.4 | 9.8 | 9.3 | 8.9 | 8.6 |
| C25016 | 11.7 | 10.7 | 10.1 | 9.5 | 9.1 | 8.7 |
| C25020 | 12.4 | 11.4 | 10.7 | 10.2 | 9.7 | 9.3 |
| C25025 | 13.1 | 12.1 | 11.4 | 10.8 | 10.3 | 9.9 |
| C25030 | 13.3 | 12.3 | 11.6 | 11.0 | 10.5 | 10.1 |
| C30016 | 14.1 | 13 | 12.2 | 11.6 | 11.1 | 10.6 |
| C30020 | 14.9 | 13.9 | 13 | 12.4 | 11.8 | 11.4 |
| C30025 | 15.8 | 14.7 | 13.8 | 13.1 | 12.6 | 12.1 |
| C30030 | 16.0 | 14.9 | 14.1 | 13.3 | 12.8 | 12.3 |


Disclaimer : The information on the materials presented herein is provided for informational purposes only. Sunlight Hardware shall not be liable for any loss, or damage whatsoever arising from, but not limited to the usage of information provided. Any omission, error, typographical errors and technical inaccuracies relating to the information may be changed or updated without prior notice.

GENERAL INSTALLATION GUIDE


TYPICAL ARRANGEMENT OF IN-LINE C

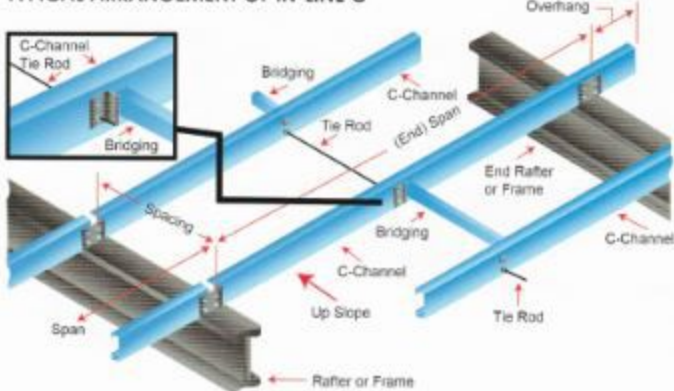


PRE-PUNCH HOLES DETAILINGS

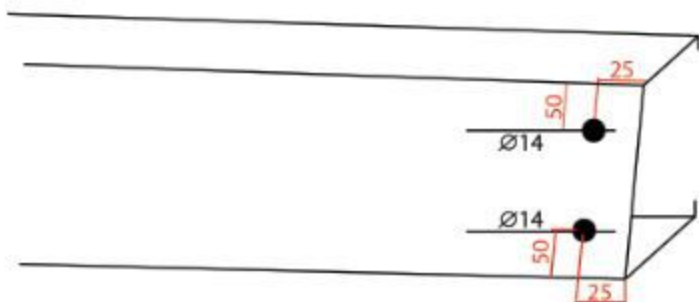


Types of Holes Design :



18 X 22mm



14 X 22mm




14 mm




SUNLIGHT ROOFING ACCESSORIES


CAPPING AND FLASHING




RIDGE CAPPING TYPE 24




RIDGE CAPPING TYPE 18




HIP CAPPING TYPE 18




HIP CAPPING TYPE 12




FLASHING TYPE 18A




FLASHING TYPE 12A




FLASHING TYPE 18B




FLASHING TYPE 12B




FASCIA/BARGE CAPPING TYPE 18




FASCIA/BARGE CAPPING TYPE 18




CORNER CAPPING TYPE 9A




CORNER CAPPING TYPE 9B



VALLEY TRAY TYPE 24




VALLEY TRAY TYPE 18

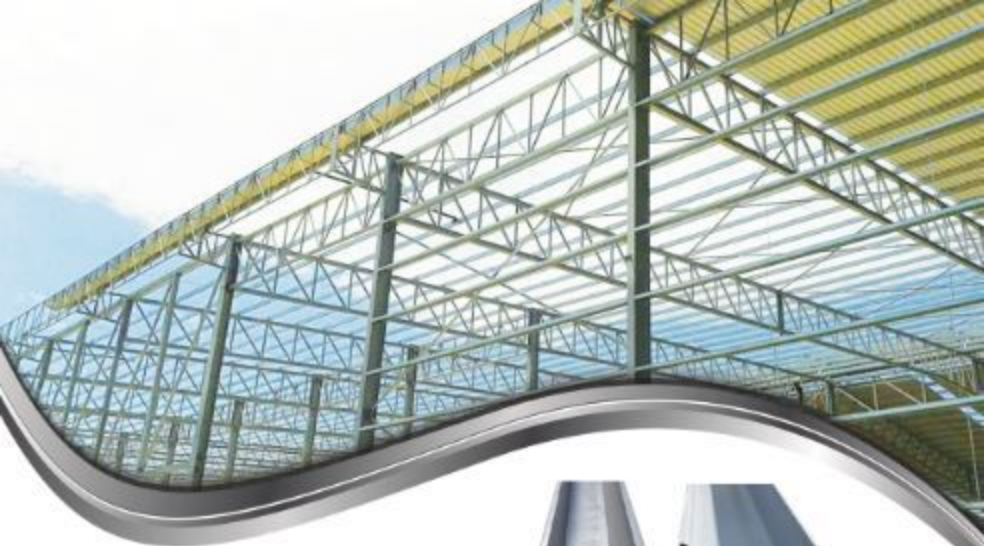


GUTTER

TYPICAL DESIGN :



TYPE 24A



TYPE 24B



TYPE 24C

- | | |
|-------------------|---|
| LENGTHS | : All flashing, capping and gutter can be available at maximum 2.4 metre. |
| DESIGNS | : All flashing, capping and gutter can be available to custom made based on design requirements. |
| TOLERANCES | : Length $\pm 5\text{mm}$ Thickness $\pm 0.03\text{mm}$ Cover Width $\pm 4\text{mm}$ |
| MATERIAL | : <u>Flashing And Capping</u> Available in Pre-Painted Galvanized Iron (PPGI), Zinalume |
| MATERIAL | : <u>Gutter</u> Available in Stainless Steel, Galvanized Iron (G.I), Zinalume, Preprinted Galvanised Iron (PPGI), PVC. |

OTHER PRODUCTS




PU METAL ROOF



ROCKWOOL



FIBREGLASS WOOL



ALUMINIUM FOIL




**STEEL FLOOR DECKING
(TRAPEZOIDAL PROFILE)**




**STEEL FLOOR DECKING
(RE-ENTRANT PROFILE)**



BRC 3315 WIRE MESH




**FRP (TRANSLUCENT)
SHEET**




**POLYCARBONATE
ROOFING SHEET**



**HIGH IMPACT ARCYLIC
ROOFING SHEET**




**POLYCARBONATE
SOLID SHEET**



ALUMINIUM CAPPING

OTHER PRODUCTS




METAL FASCIA BOARD



ALUMINIUM COMPOSITE PANEL



STRIP CEILING



ANGLE BAR




EXPANDED METAL



MILD STEEL HOLLOW



MILD STEEL U-CHANNEL



**ROLLER SHUTTER
PANELS WITH
ACCESSORIES**




OPP / 3 IN 1



SCREWS



**SILICONE & AWNING
CAULKS**



PU FOAM FILLER

PROJECT REFERENCES





YK Red
亮红



YK Blue
亮蓝



Fina Blue
紫蓝




Yodo Green
深青



Express Green
浅青



Light Beige
米色



Airway Grey
深灰



Pale Grey
浅灰




Off White
白色



G.I.
镀锌





Alumzinc
镀锌铝镁




Back Coat Reversed Colour
(Shadow Grey)
底灰色

COATING SYSTEM :

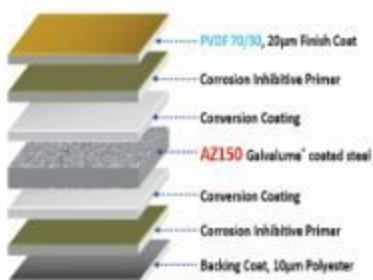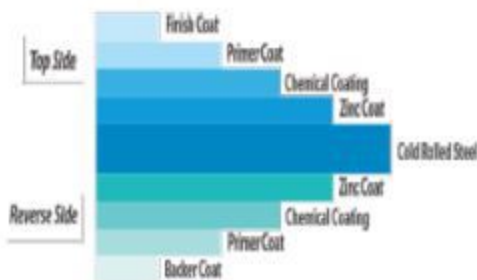

Accessories

- 1 Sunlight Ridge Capping
- 2 Sunlight Round Capping
- 3 Sunlight Parapet Wall Capping



Structural Product

- 4 Sunlight Batten
- 5 Sunlight C Purlin
- 6 Sunlight C Section



Roofing

- | | |
|----------------------------|--------------------------------------|
| 7 Sunlight Clip Lock 710 | 8 Rockwool |
| 9 Sunlight Eurotile | 9 Fibreglass wool |
| 10 Sunlight Metal Deck 762 | 10 Double sided Aluminium Woven Felt |
| 11 Sunlight Single Crimp | 11 BRC 3315 |
| 12 Sunlight Crimp Curve | |



Rainwater Goods

- 13 Colour Coated Gutter
- 14 G.I Gutter
- 15 Stainless Steel Gutter
- 16 PVC Gutter

