


Your Inspirations.  
Our Innovations.



PIC1007WP

## TRUE PLUG & PLAY Wireless-N Pan/Tilt IP Camera

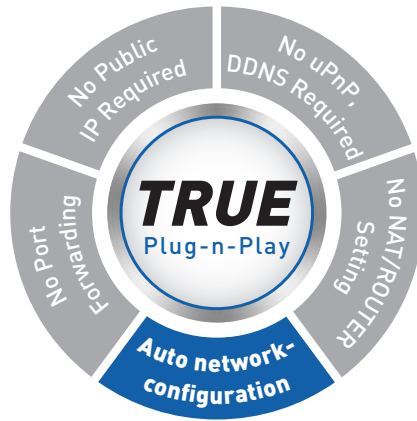

Zero Configuration



Auto Day & Night Mode




Pan & Tilt Remote Control



36 Multi-screen Monitoring



MicroSD & NAS Storage



Mobile Viewing




Motion Detection

The **PROLiNK PIC1007WP True Plug & Play Wireless-N Pan/Tilt IP Camera** is an easy to set up IP Camera with no complicated router settings or network configurations. The PIC1007WP comes with a variety of sensors (PIR, Infrared Thermometer, Sound and Motion Detection) to give you the most precise information on the site you are monitoring.

The High Definition MegaPixel Dual Lens IP Camera ensures that you get quality footage/ visuals whether it is day/ night, and no IR cut filter is utilised, reducing the risk of mechanical failure. Communicating is also made simple as the camera already comes built-in with a speaker and microphone.


The user can install the PIC1007WP easily on his/her home network and then access the IP Camera anywhere in the world through the bundled video management software- LiveView or the free mobile application mLiveView (available from Google Play or iTunes). In addition, you can also choose to record and store your footage to a MicroSD card, PC, NAS or your mobile, and set push notifications alerts to your mobile phone.

### As Easy As 1-2-3 Setup

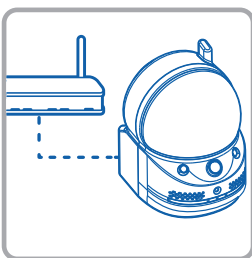

#### 1. Connect To Router

Connect the camera to the router through wired or use one touch WiFi security setup (WPS) for wireless connection

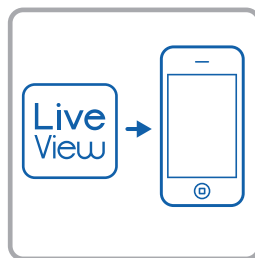

#### 2. Download Apps To Mobile/Tablet

**Mobile Access (Android & iOS):**  
Install the free application mLiveView/mLiveViewHD on your smartphones/ tablets

**PC Viewing (Windows):**  
Install LiveView software from CD (provided in the Setup CD)

**Web Access (Internet Explorer):**  
Open <http://www.fida.com/online.html>



#### 3. Key-in Camera ID & Password

Key in your camera ID and password Ready for viewing

## Specifications

<b>Processor</b>	RISC CPU, hardware video processing and compression
<b>Interfaces</b>	RJ-45 Ethernet 10/100Mbps, Auto-Negotiation (MIDX) Wireless IEEE 802.11 b/g/n with WPS button
<b>Max. Connection</b>	Up to 36 cameras and 20 unicast users simultaneously
<b>Recording</b>	Built-in Micro-SD slot (up to 64GB); Direct recording to NAS Storage, PC or Mobile
<b>Image Sensor</b>	RGB VGA 1/4 inch CMOS; Day and Night Separate Sensors; Automatic Exposure/ White Balance/ Gain/ Brightness control
<b>Light Sensitivity</b>	0.2 Lux (IR LED off); 0 Lux (with 10 meters IR LED on); Automatically turn on the IR LED in low light environment
<b>Lens</b>	4.2mm; F2.4; Viewing angle: 66°; Fixed iris; Focus range: 30cm to infinity; Two separate lens, one for Day and one for Night
<b>Buttons</b>	Factory default reset; WiFi security setup (WPS)
<b>Indicators</b>	LED indication for Internet connection, Ethernet connection and SD card recording
<b>Pan/Tilt Control</b>	Pan viewing range: 180° (-90° ~ 90°); Tilt viewing range 90° (0°~90°)
<b>Infrared Thermometer</b>	Range: -40~115° C; Accuracy: +- 0.5° C; Field of view: 90°
<b>Video</b>	H.264 (MPEG-4 AVC) compression; Max. Resolution WXGA 1280 x 800 at 30fps
<b>Audio</b>	Built-in microphone for audio monitoring; Built-in 0.5W speaker for alarm and 2-way communication; 3.5mm line out jack for external speaker; Audio compression G.711
<b>Alert And Monitoring Mechanisms</b>	PIR sensor; Motion detection, Sound detection; Temperature monitoring; Notification via Email/FTP; Push notification on IOS and Android devices*
<b>Physical Specifications</b>	Dimensions - 124(H) x 91(W) x 100(L) mm; Weight - 350g (camera body only)
<b>Package Contents</b>	PIC1007WP Camera; Power adaptor; Ethernet cable; Quick Installation Guide, Setup CD, ID/Password card, Anchors & Screws

## HD


### High Definition MegaPixel

High definition 720p with 1280 x 800 resolution at 30fps. Supports the latest H.264 technology in video compression.



### Pan/ Tilt

Motorized Pan/ Tilt functions dramatically improve surveillance area.

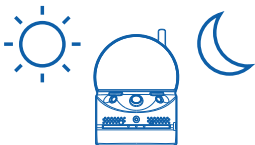


### Dual Lens & Sensors for Day and Night Operation

Equipped with dual lens and image sensors for clearer visuals. One specially tuned for day and the other for night use



### 2-Way Audio (Built-in Microphone & Speaker)

With built-in microphone and speaker, users can now communicate with people around the camera anytime. Alternatively, you can setup the speaker to act as an alarm siren whenever there is an alert trigger.



### True Plug and Play

True Plug-and-Play solution with no complicated router settings and network configuration. All you need to do is connect PIC1007WP to the internet network and key in the Camera ID and Password to get started.

\*Push Notification is only available in Android, iOS mLiveView PRO and HD PRO version.



### System Requirements:

Windows XP/Vista/7/8, Mac\*, Linux  
\*Support for Intel-based Mac only

