



# EM-360 / 370HS DM-270 / 320 / 420 / 520

Wired Microphones




# Specifications

Microphone	DM-270	DM-320	DM-420	DM-520	EM-360	EM-370HS
Type	Dynamic				Electret condenser	
Directivity	Unidirectional					
Rated Impedance	600 Ω, balanced				2 kΩ, unbalanced	2.5 kΩ, unbalanced
Sensitivity (1 kHz, 0 dB = 1 V/Pa)	-52 dB	-55 dB	-52 dB	-55 dB	-48 dB	-51 dB
Frequency Response	100 Hz - 15 kHz	100 Hz - 12 kHz	80 Hz - 13 kHz		100 Hz - 16 kHz	50 Hz - 12 kHz
Cable Length	5 m	7.5 m			7 m	10 m
Connector	XLR-3				Unbalance phone jack	
Talk Switch	Short-off, slide switch			Short-off, slide switch, magnetic switch, locking system	-	-
Finish	Body: Die-cast aluminum Head: Die-cast aluminum / zinc plated steel wire				ABS	Battery case: ABS Headset: Metal
Dimensions	ø47 x 175 mm	ø52 x 183 mm	ø50 x 176 mm		38 x 89.5 x 19 mm (mic body)	
Weight		300 g	280 g	232 g	131 g	142 g
Battery	-	-	-	-	1 x 'AA' (R6S or UM-3U)	
Accessory	Microphone holder				Clip holder	-

## Characteristic Diagrams

### Frequency Response

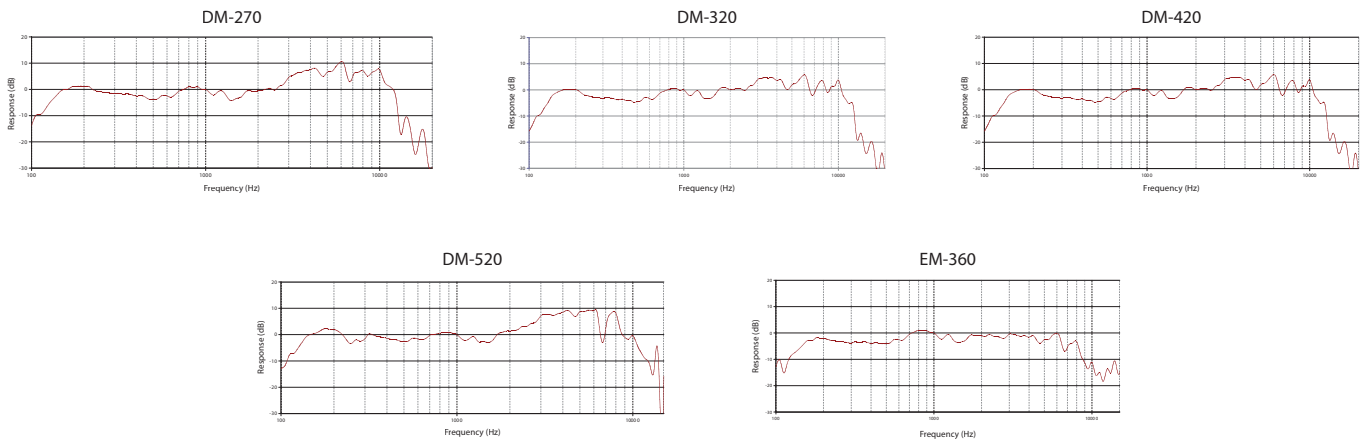

### Polar Response

