

SR-H3L

LINE ARRAY SPEAKER

The SR-H3L Line array speaker forms a linear sound source by the internal speaker units arrayed vertically in close proximity. It can be used for high-impedance applications with the installation of the optional MT-S0301 Matching transformer.




Order no: SR-H3L

Specifications

Frequency response	110 Hz - 18 kHz
Connection	Removable input connector
Sensitivity (1#V, 1#m) (combined)	95 dB
Speaker component	7 cm cone-type x 16
Directivity angle horizontal	90 °
Rated impedance	8 Ω
Power handling capacity	Continuous program: 360 W
Dimensions (W x H x D)	84 x 1186,4 x 115 mm
Dimensions (ø x D)	x 115 mm
Finish	MDF, paint, off-white (RAL 9010 or equivalent)

Appearance

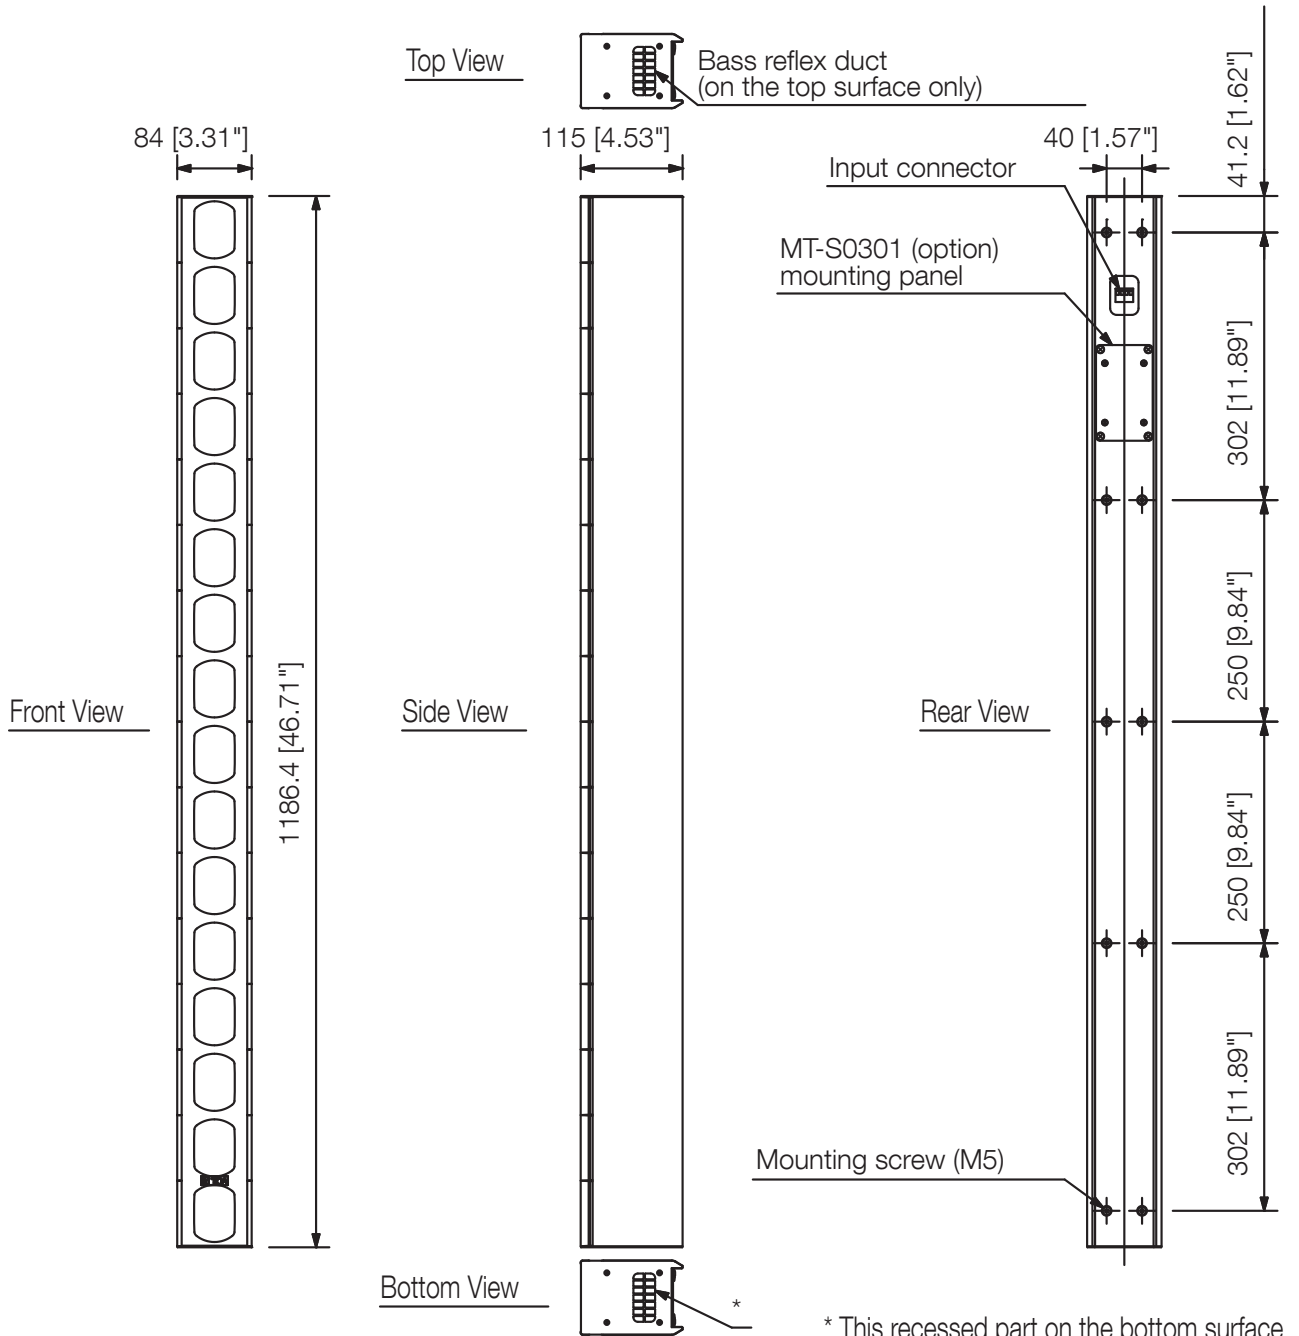

* This recessed part on the bottom surface does not function as a bass reflex duct.

UNIT:mm SCALE:1/10