



Just because working on cars can leave you dirty doesn't mean your garage has to be left that way. A clean, efficient garage sends a message to your customers that you'll treat their vehicles with the same attentive care. That's where Snap-on® cleaning equipment can help.

HELPING YOU CLEAN UP IS WHERE WE REALLY SHINE.

With a range of cleaning solutions and solvent-based or aqueous parts washers, we can help keep your tools and your garage looking polished. Our parts washers provide the added benefit of minimizing service fees for disposing of used solvents. Which means they can save you money and help you make more money at the same time.





SHOP CLEANING

PARTS WASHERS: SOLVENT BASED

Snap-on® dual filter parts washers provide a clean supply of solvent for washing parts. Filtration system virtually eliminates solvent changes.

Parts Washers

- Composite dual stage filter provides continuous filtration of solvent
- Tubs are constructed of 16 gauge steel and feature an added lip for strength
- Complete with work lamp and flexible spout (except for PBD34A and PBC16)
- Use PBA760 Solvent on p.724

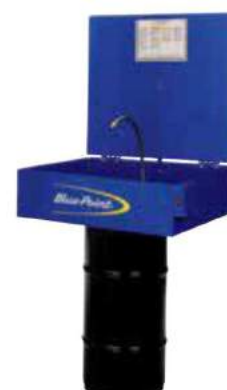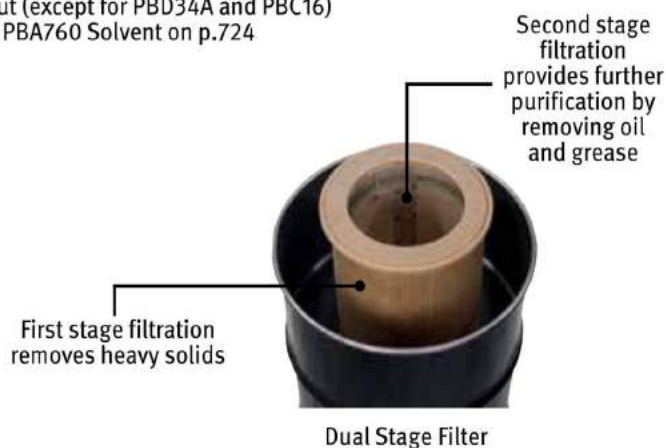

| Specifications | PBD3222A | PBC3222A | PBC4828 | PBD2622A | PBC16 | PBD34A* |
|-----------------------------------|--------------------|--------------------|--------------------|--------------------|-------------------|--------------------|
| Filtration | Dual | Dual | Dual | Dual | — | — |
| Base | Drum | Square | Square | Drum | — | Drum |
| Inside Dimensions, inches | 32 W x 22 D x 10 H | 32 W x 22 D x 10 H | 48 W x 28 D x 14 H | 26 W x 17 D x 7 H | 15 W x 16 D x 6 H | 28 W x 22 D x 7 H |
| Fluid Requirements (gal) | 20 | 20 | 20 | 10 | 5 | 10 |
| Input, VAC (Hz) | 120 V AC (60 Hz) | 120 V AC (60 Hz) | 120 V AC (60 Hz) | 120 V AC (60 Hz) | 120 V AC, 60 Hz | 120 V AC (60 Hz) |
| Pump Volume, gallons/hour | 325 | 325 | 325 | 210 | 210 | 210 |
| Output Pressure, PSI | 50 | 50 | 50 | 50 | 50 | 50 |
| Overall Dimensions, inches | 36 W x 26 D x 39 H | 36 W x 26 D x 39 H | 52 W x 32 D x 45 H | 30 W x 21 D x 34 H | 1 W x 23 D x 10 H | 31 W x 23 D x 35 H |
| Open Height, inches | 63 | 63 | 75 | 53 | 23 | 60 |
| Replacement Filter | PBD3209 | PBD3209 | PBD3209 | PBD3202 | — | — |
| European Models (230 V AC, 50 Hz) | PBDH3222AEUR | PBCH3222AEUR | PBCH4828EUR | PBDH2622AEUR | — | — |
| PBD1751 Parts Tray | Included | Included | Included | — | PBCH16-EUR | Optional |
| PBA720A Drain Table | Optional | Optional | Optional | — | — | Optional |

*Blue-Point®
European Model – (230V AC, 50Hz)

TECHNICAL SUPPORT 1-800-253-3661

Electric/Medium Duty

PBC3022 Heated Aqueous Parts Washer

- Compact design is portable and can be moved to the job site easily
- Sealed lid prevents splashing when used on mobile service vehicles
- Heavy plastic body and lid is made out of high density polyethylene
- Stainless-steel mesh work surface for durability and strength
- Heating element increases cleaning effectiveness and is thermostatically controlled
- Features a 5-micron filter to separate out dirt and debris



PBC3022

PBC33B Heated Aqueous Parts Washer

- Clean parts with a pressurized cleaning spout
- Heated for additional effectiveness
- Polysateen drain filter to remove solids
- Heavy wall polyethylene tub and solid base
- Integral oil skimmer removes oil and grease from the cleaning solution
- Includes (5) gallons of PBA733 cleaning solution and (1) gallon of PBA734 cleaning concentrate booster
- Low solution warning indicator



PBC33B

PBC42B High-Pressure Parts Washer

- Fully enclosed aqueous parts washer
- Blast parts clean with a 500 PSI high-pressure wand
- Soap solution is heated for additional effectiveness
- Automatic soak cycle loosens up grime



PBC42B

Electric/Heavy Duty

PBC57A High-Pressure Automatic Parts Washer

- High-pressure aqueous parts washer effectively cleans engine blocks, cylinder heads, transmission cases and small parts
- Automatically cleans parts with a 45 PSI heated soap solution spraying from 18 high-pressure nozzles
- Controllable cycle time from 0–60 minutes
- Five RPM turntable is driven by a #40 chain for rotation without slippage, pulls out 18" for easy part loading
- Sprocket drive assembly has sealed bearing shafts for longevity
- Includes 25 lb of biodegradable soap concentrate
- Also includes integral oil skimmer and pump reservoir filter to remove oil and grease, helping maintain cleaning effectiveness
- Rugged 12 gauge steel construction with solid welded seams



PBC57A

PBC55-1 Parts Basket

- Perforated steel basket for holding small parts



PBC55-1

PBC55-3 Parts Tree

- Welded steel tube rack for hanging smaller parts



PBC55-3

| Specifications | PBC33B | PBC42B | PBC57A | PBC3022 |
|----------------------------|------------------------|-----------------------|--------------------|--------------------|
| Depth, inches (mm) | 28 (711) | 24 (610) | 35 (889) | 22 (559) |
| Reservoir Capacity, gal | 20 | 12 | 60 | 6 |
| Electrical Req. | 120 V AC, 60 Hz | 230 V AC, 60 Hz | 230 V AC, 60 Hz | 115 V AC, 20 A |
| Pump Motor, HP | — | 3/4 | 2 | — |
| Output Pressure, PSI | 50 | 500 | 45 | 50 |
| Volume, gal/h | 325 | 180 | 2,700 | 325 |
| Heater, watts | 1,500 | 1,500 | 9,000 | 1,500 |
| Open Height, inches | 65 | 69 | 69 | 32 |
| Inside Dimensions, inches | 21 W x 31-1/2 D x 10 H | 40 W x 24 D x 16–24 H | 35 W x 35 D x 41 H | 17 W x 12 D x 14 H |
| Overall Dimensions, inches | 37 W x 28 D x 42 H | 44 W x 24 D x 65 H | 53 W x 43 D x 69 H | 30 W x 22 D x 32 H |

European Models – PBCH33B-EUR† (230V AC, 50Hz), PBCH42B-EUR† (230V AC, 50Hz), PBCH57AEUR† (230V AC, 50Hz)

† CEE

Air Agitated Immersion Cleaners

PBD16 Air Agitated Immersion Cleaner

- Use with parts degreaser or carburetor cleaner
- Heavy-duty air motor rotates basket in both directions
- Cover has locking band that seals unit
- 4-1/2" deep basket has hook for draining parts from top of pail and holes for holding extra-small parts

- Overall height of 32"
- Base diameter of 14-1/2"
- Requires 5 CFM @ 100 PSI



PBD16



- Do not direct air or fluid stream at body
- Do not expose solvent to flames, sparks or other source of ignition
- Use in well ventilated area

- Do not use washer without fusible link or safety valve intact
- Read safety precautions on pages W1 to W4

PARTS WASHERS: ACCESSORIES



GA501A



YA452



GA503

Parts Cleaning Brushes/Solvent Based

YA452 Parts Cleaning Brush (Blue-Point®)

- Stiff bristles with contoured, non-slip plastic handle
- Attaches to most parts washers
- Flared hose end fits 1/4" spouts: 24" long hose has internal spring to prevent kinking

GA501A Parts Cleaning Brush (Blue-Point®)

- Stiff bristles with contoured, non-slip plastic handle
- 11-1/4" long

GA503 Round Angled Parts Cleaning Brush (Blue-Point®)

- Angled round brush design
- Attaches to most parts washers



YADW896B

Cleaning Solutions for Aqueous Based Parts Washers

YADW896B Powdered Soap Cleaner

- Low foaming powdered soap solution
- For use in PBC57A and PBC42B parts washers
- Comes in a 25 lb container – 25 lb of powder makes 120 gallons of solution

PBA734 Cleaning Solution Additive

- Used in both PBC3022 and PBC33B for an added boost of cleaning power

PBA733 Certified Green

Concentrate Solution

- Specially formulated solution does not absorb oil and dirt
- For use in PBC33A and B parts washers
- Comes in a 5-gallon container; makes 20 gallons of solution

PBA735 Certified Green

Concentrate Solution

- Same as PBA733 except 1-gallon container



PBA760

Petroleum Based Solvent Cleaners

PBA760 Solvent Cleaner

- Excellent for removing oil and grease
- Petroleum based cleaner with 140 flash point
- For solvent based parts washers only
- Comes in a 5-gallon container



PBA725

Solvent Based Parts Washer Accessories

PBA725 Parts Basket

- Hangs inside solvent based parts washers

PBA732 Casters

- Set of four casters for the PBC32, PBC4810 and PBC4814 parts washers

PBA720A Drain Table

- Attaches to outside of parts washer
- Measures 25-1/2 W x 18-1/2" D

PBD1751 Parts Tray

- Attaches to outside of parts washer
- Measures 12-1/2 W x 18-1/2" D

PRESSURE WASHERS: PARTS CLEANING



YA730D

Hose Reels

YA730D Heavy Duty Air/Water Hose Reel

- 50' of 3/8" ID low-pressure rubber hose
- Adjustable ball stop
- 24" connecting hose
- High carbon steel retraction spring
- Guide arm adjusts to four positions



Water Nozzles and Hoses

YA571 Water Spray Nozzle

- Sprays hot or cold water
- Clip locks spray at desired setting
- Nose bumper prevents scratches to auto paint
- Fits standard garden hose threads

GA299 Air Solvent Gun (Blue-Point®)

- Used for degreasing or applying oils
- Quickly converts to long wanded air gun
- Operates on 35-175 PSI
- 8' hose for siphoning chemicals into gun
- For hoses with 1/4" NPT male fitting
- Shaft length of 10-1/2"; overall length of 16-1/2"

NOZZLEPG1 Pistol Grip Water Nozzle

- Multiple spray patterns from jet, fan, power and low flow
- Ergonomic handle allows for easy grip and less fatigue
- Precision flow port allows water to flow directly and not up and through the handle, increasing water flow, pressure and power by approximately 30%
- Machined aircraft aluminum barrel with stainless-steel construction
- Santoprene® rubber handle and head provide superior durability
- Works with any standard 5/8" or larger water hose

NOZZLEPG2 Aluminum Hose Nozzle with On-Off Lever

- Lever provides 2-way shut-off allowing spray pattern to remain the same when turning on and off
- All aluminum stem for superior durability
- Precision flow port allows water to flow directly and not "up" and through the handle
- Santoprene® rubber handle and head provide superior durability

NOZZLE360A Water Spray Nozzle (Blue-Point®)

- Turns any standard 5/8" hose into a multifunction cleaning tool
- Five different spray patterns
- 360° jetted nozzle is engineered from rugged extruded aluminum, forged stainless-steel, high grade fiberglass and comfort grip santoprene
- Two-way shutoff

NOZZLESPRY1 Straight Grip Water Nozzle

- Multiple spray patterns from jet, fan, power and even low flow
- Extra long handle for better grip
- Works with any standard 5/8" or larger water hose

NOZZLESPRY2 Long Handle Hose Nozzle On/Off Lever

- On/Off lever allows user to keep the same spray pattern and not have to turn the head to shut off the water
- Black anodized barrel with etched Snap-on® logo
- Head design improved to offer even more protection from accidentally scratching any surface it comes in contact with
- "Low Flow" design has been incorporated to help the water flow and increase the water pressure

YA297 Water Saving Hose Nozzle (Blue-Point®)

- Provides concentrated pressure stream
- Features special rocker actuated check valve
- Fits standard garden hose threads
- 9" long

PRESSURE WASHERS: COLD WATER



Electric Power

Adjustable 0-60° spray nozzle and GFCI protection with 35' power cord.

| Specifications | SEPW1500P | SEPW1500SM | SEPW1000 | SEPW1500USA |
|------------------------|-------------------------|-------------------------|-------------------------|-------------------|
| Style | Hand Carry | Wall Mounted | Cart Mounted | Cart Mounted |
| PSI (bar) | 1,450 (100) | 1,450 (100) | 1,000 (69) | 1,500 (103.5) |
| GPM (L/min) | 2 (7.6) | 2 (7.6) | 2 (7.6) | 2 (7.6) |
| Horsepower, HP | 2 | 2 | 1.5 | 2 |
| Voltage | 120 V/20 A/single phase | 120 V/20 A/single phase | 120 V/15 A/single phase | 120 V/17 A |
| Chemical Tank Capacity | — | — | 1 gal | — |
| Pump Max. Temperature | 140 °F | 180 °F | 140 °F | 140 °F |
| Thermal | Mechanical | Mechanical | Mechanical | Mechanical |
| Hose Length, feet | 26 | 25 | 25 | 25 |
| Dimensions (L x W x H) | 18 x 12 x 11" | 20 x 12 x 20" | 21 x 16 x 36" | 30 x 21-1/2 x 36" |
| Shipping Weight, lb | 68 | 98 | 65 | 150 |



- Do not direct air or fluid stream at body
- Read safety precautions on pages W1 to W4

PRESSURE WASHERS



SEPW1600G

SEPW2700G

Gas Engine

Interchangeable or adjustable 0 to 40° spray nozzle plus powder coated tube frame cart with pneumatic tires.

| Specifications | SEPW1600G | SEPW2700G |
|------------------------|-------------------|-------------------|
| Style | Cart Mounted | Cart Mounted |
| PSI (bar) | 1,600 (110.4) | 2,700 (183.3) |
| GPM (L/min) | 3 (11.4) | 3 (11.4) |
| Engine | 160 cc | 196 cc |
| Fuel Tank Capacity | 1.9 qt | 3.9 qt |
| Chemical Tank Capacity | 3 gal | 3 gal. |
| Thermal | 165 °F | 165 °F |
| Hose Length | 50 | — |
| Dimensions (L x W x H) | 30 x 21-1/2 x 36" | 30 x 21-1/2 x 36" |
| Shipping Weight, lb | 87 | 108 |

OIL FIRED HOT WATER



SEPW30SHDE

SEPW2725SHDE

Heats water to 200 °F. Includes ceramic plunger pump with stainless-steel valves, trigger gun, interchangeable nozzles, chemical injection, adjustable pressure, stainless-steel cold wrap-around coil, poly fuel tanks and GFCI protection. Powder-coated tube-frame cart with pneumatic tires for extra durability.

Electric Power

| Specifications | SEPW14SHDE | SEPW20SHDE | SEPW30SHDE | SEPW2725SHDE |
|------------------------|-------------------------|-------------------------|-------------------------|-------------------------|
| PSI (bar) | 1,450 (100) | 2,000 (138) | 3,000 (207) | 2,700 (186) |
| GPM (L/min) | 2 (7.6) | 4 (15.2) | 4 (15.2) | — |
| Horsepower, HP | 2 | 5 | 7.5 | 5 |
| Voltage | 120 V/20 A/single phase | 230 V/25 A/single phase | 230 V/34 A/single phase | 230 V/25 A/single phase |
| Burner Fuel Capacity | 5 gal | 5 gal | 5 gal | — |
| Dimensions (L x W x H) | 34 x 27 x 47" | 34 x 27 x 47" | 34 x 27 x 47" | 34 x 27 x 47" |
| Shipping Weight, lb | 350 | 570 | 600 | 430 |
| Hose Length, feet | 50 | 50 | 50 | 50 |



SEPW3000QH

Gas Engine

| Specifications | SEPW3000QH |
|-------------------------|--------------|
| PSI (bar) | 3,000 (207) |
| GPM (L/min) | 4 (15.2) |
| Engine Displacement, cc | 389 |
| Fuel Tank Capacity | 6.9 qt |
| Burner Fuel Capacity | 5 gal |
| Dimensions (L x W x H) | 54 x 32 x 49 |
| Shipping Weight, lb | 600 |
| Hose Length, feet | 50 |

VACUUMS/SHOP FANS: VACUUMS



AV1000A

AV1000A Deluxe Air Vacuum Kit (Blue-Point®)

- Ideal for vehicle media body shops or any applications in need of picking up dust, metal shavings or broken glass
- Includes 8.7" aluminum extension tube, pointed nozzle, flexible tube and crevice tool with brush
- Large collection bag includes a debris baffle and sliding bag clamp for emptying debris
- Lightweight ergonomic handle design



VACUUMS/SHOP FANS: VACUUMS

Wet/Dry Vacuums

Industrial strength full wet/dry cleaning and drying machines combine the highest degree of suction/airflow with ruggedly durable motors. Highest quality materials ensure long life. Ball bearing motor designed for strong performance with less motor strain. Engineered for easy portability and long life.



| Specifications | BLPVAC5 | SOVAC16 | YA1009SSA | YA1023A | YA1105A |
|-----------------|---|--|--|--|--|
| Tank | 5 gal Polypro | 16 gal Polypro | Corrosion Resistant | 23 gal Poly | Corrosion Resistant |
| Casters | 4 Metal Casters | Large Rear/Swivel Front | Large Rear/Swivel Front | Large Rear/Swivel Front | 4 Swivel |
| Waterlift | 65" | — | 93" | 93" | 93" |
| Motor | 1-Stage | 2-Stage | 2-Stage | 2-Stage | 2-Stage |
| CFM | 49 | 125 | 99 | 99 | 99 |
| Approvals | UL® and CUL | UL® and CUL | UL® and CUL | UL® and CUL® | UL® and CUL |
| Operation | Full Wet and Dry | Full Wet and Dry | Full Wet and Dry | Full Wet and Dry | Full Wet and Dry |
| Filter Assembly | (Washable Cartridge Filter) | (Foam and Cartridge Filter) | YAT90445 | YAT90448 | YAT24519 |
| Includes | 7' hose (1-1/4" dia.), 3 extension wands, washable cartridge filter, reusable foam sleeve, 10" floor squeegee nozzle with brush and crevice tool) | 10' hose (1-1/2" dia.), foam filter, cartridge filter, dust collection bag, crevice tool, utility nozzle, car nozzle and round brush | 1-1/2" Wet/Dry Tool Set (hose w/ swivel end, crevice tool, upholstery tool, 2 straight extensions, floor tool housing with carpet face, brush face, squeegee face) | 1.5" Wet/Dry Tool Set (hose with swivel end, crevice tool, upholstery tool, 2 straight extensions, floor tool housing with carpet face, squeegee face) | 1.5" Wet/Dry Tool Set (hose with swivel end, crevice tool, upholstery tool, 2 straight extensions, floor tool housing with carpet face, squeegee face) |

*Blue-Point®

SHOP FANS



Portable Spotters

YA1102 Portable Spotter

- Use on carpeting, seat fabrics and other cleaning needs
- Durable molded tank
- Large 2-gallon capacity
- Powerful 55 PSI solution pump motor
- Strong recovery with 94 CFM vacuum rating
- Quick disconnect solution hose at body
- Includes hose and hand tool
- UL® and CSA® listed
- ETL and ETL-c listed
- 84" waterlift
- Bypass 1.2 HP motor



Shop Fans

WIND100 Heavy Duty Air Mover

- Enclosed spaces
- Maximum 2,500 CFM output
- Three-position discharge adjustment
- Three-speed switch

| Specifications | WIND100 |
|----------------------|-------------------------|
| Power | 120 V AC/60 Hz |
| Speeds | 3 |
| Air Delivery | 1,600; 2,000; 2,500 CFM |
| Air Flow Direction | 0°/30°/90° |
| High Output Fan Size | 10-1/2" W x 10-3/4" D |
| Motor | .5 HP |
| Motor Rating | Continuous Duty |
| Power Cord | 15' (18/3) |
| Size, inches | 18 x 14 x 20-1/2 |



- Do not direct air or fluid stream at body
- Read safety precautions on pages W1 to W4