

# HS-100 Accelerometer


## AC acceleration output via M12 Connector

### Key Features


- Most common seller
- For use with data collector
- Customizable features

### Industries

Building services, Pulp and Paper, Mining, Metals, Utilities, Automotive, Water, Pharmaceutical

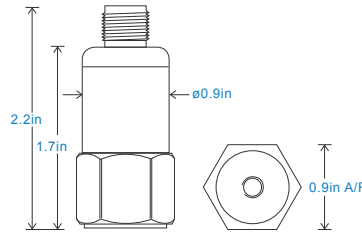

### Connection Details



### Technical Performance

Mounted Base Resonance	see 'How To Order' table (nominal)
Sensitivity	see: 'How To Order' table $\pm 10\%$ Nominal 80Hz at 72°F
Frequency Response	90cpm (1.5Hz) to 600kcpm (10kHz) $\pm 5\%$ 30cpm (0.5Hz) to 720kcpm (12kHz) $\pm 10\%$ 12cpm (0.2Hz) to 900kcpm (15kHz) $\pm 3dB$
Isolation	Base isolated
Range	see: 'How To Order' table
Transverse Sensitivity	Less than 5%

### Mechanical

Case Material	Stainless Steel
Sensing Element/Construction	PZT/Compression
Mounting Torque	8Nm
Weight	106gms (nominal) body only
Shielded Cable Assembly	HS-AC010 - straight HS-AC011 - right angle
Mounting Threads	see: 'How To Order' table


### Electrical

Excitation Voltage:	18-30Volts DC
Electrical Noise	0.1mg max
Current Range	0.5mA to 8mA
Bias Voltage	10 - 12 Volts DC
Settling Time	2 seconds
Output Impedance	200 Ohms max.
Case Isolation	$>10^8$ Ohms at 500 Volts

### Environmental

Operating Temperature Range	-67 to 284°F
Sealing	IP67
Maximum Shock	5000g
EMC	EN61326-1:2013


### Typical Frequency Response (at 100mV/g)

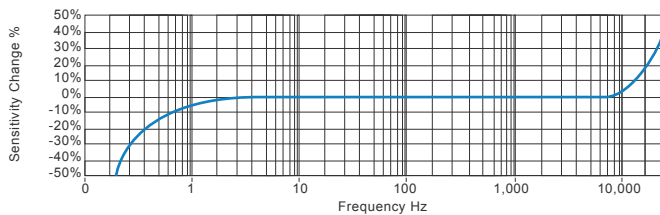

### Applications

Fans, Motors, Pumps, Compressors, Centrifuges, Conveyors, Air Handlers, Gearboxes, Rolls, Dryers, Presses, Cooling, VAC, Spindles, Machine Tooling, Process Equipment

Vibration sensor should be firmly fixed to a flat surface (spot face surface may be needed to be produced and cable anchored to sensor body.)



### How To Order

<b>Product Prefix</b> HS - Hansford Sensors	<b>Product Series</b> 100 - Industrial Vibration Sensor													
<b>H</b>	<b>S</b>	<b>1</b>	<b>0</b>	<b>0</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>			
<b>Extra Options (if required)</b>		<b>Sensitivity</b>	<b>Range</b>	<b>Resonant Frequency</b>		<b>Cable/Connector</b>			<b>Mounting Threads</b>					
F - Filtered	I - Intrinsically Safe	010 - 10mV/g $\pm 800g$	030 - 30mV/g $\pm 250g$	050 - 50mV/g $\pm 160g$	100 - 100mV/g $\pm 80g$	250 - 250mV/g $\pm 32g$	500 - 500mV/g $\pm 16g$	010 - 1,680kcpm (28kHz)	020 - 1,560kcpm (26kHz)	040 - 1,440kcpm (24kHz)	020 - 1,320kcpm (22kHz)	050 - 1,200kcpm (20kHz)	01 - PUR	01 - 1/4"-28" UNF Female
L - 316L Stainless Steel	RT - Temperature Output PT100	100 - 100mV/g $\pm 80g$	250 - 250mV/g $\pm 32g$	500 - 500mV/g $\pm 16g$	1,320kcpm (22kHz)	1,200kcpm (20kHz)	1,080kcpm (18kHz)	08 - Flame Retardant	50 - 2 Pin MS	54 - M12	02 - Braided	06 - M6 x 1mm Male	02 - 1/4"-28" UNF Male	02 - 1/4"-28" UNF Male
T - Temperature Output	Y - 5% tolerance on sensitivity											08 - M8 x 1.25mm Male	05 - Quick Fit Female	08 - M8 x 1.25mm Male
												10 - M10 x 1.5mm Male	10 - M10 x 1.5mm Male	



www.hansfordsensors.com  
sales@hansfordsensors.com

We reserve the right to alter the specification of this product without prior notice

TS107U.4

