



NSB003-20



NSB002-16



### NON-SPARKING COMBINATION WRENCH, SAE

Copper Beryllium, 12 point

Product Code	Size (Inches)	L Overall Length (Inches)	b2 Open End Width (Inches)	b1 Box End Diameter (Inches)	a2 Open End Thickness (Inches)	a1 Box End Thickness (Inches)
NSB003-8	1/4	4 1/4	1/2	1/2	3/16	1/4
NSB003-10	3/16"	4 3/4	3/4	1/2	3/16	1/4
NSB003-11	1/32	5 1/4	3/4	3/4	3/16	3/8
NSB003-12	3/8	5 1/4	3/4	3/4	1/4	3/8
NSB003-13	13/32"	5 1/4	3/4	3/4	1/4	3/8
NSB003-14	7/16	6	1	3/4	1/4	3/8
NSB003-16	1/2	7	1 1/4	1	1/4	3/8
NSB003-18	9/16	7	1 1/4	1	1/4	3/8
NSB003-19	19/32"	7 3/4	1 1/2	1	3/16	3/8
NSB003-20	5/8	7 3/4	1 1/2	1	3/16	3/8
NSB003-22	11/16"	7 3/4	1 1/2	1	3/16	3/8
NSB003-24	3/4	8 1/2	1 1/2	1 1/4	1/2	1/2
NSB003-25	25/32"	8 1/2	1 1/2	1 1/4	1/2	1/2
NSB003-26	13/16"	9 3/4	1 3/4	1 3/4	3/8	1/2
NSB003-28	7/8	9 3/4	1 3/4	1 3/4	3/8	1/2
NSB003-30	15/16	10 1/2	2	1 1/2	3/8	1/2
NSB003-31	31/32"	10 1/2	2	1 1/2	3/8	1/2
NSB003-32	1"	11 1/2	2 1/4	1 3/4	1/2	3/4
NSB003-34	1 1/16"	11 1/2	2 1/4	1 3/4	1/2	3/4
NSB003-36	1 1/8"	12 1/2	2 1/2	2	1/2	3/4
NSB003-38	1 3/16"	12 1/2	2 1/2	2	1/2	3/4
NSB003-40	1 1/4"	13 1/2	2 1/2	2	1/2	3/4
NSB003-42	1 5/16"	13 1/2	2 1/2	2	1/2	3/4
NSB003-44	1 3/8"	14 1/4	2 3/4	2 1/8	3/8	3/4
NSB003-46	1 7/16"	14 1/4	2 3/4	2 1/8	3/8	3/4
NSB003-48	1 1/2"	17	3 1/4	2 1/2	3/8	3/4
NSB003-50	1 9/16"	17	3 1/4	2 1/2	3/8	3/4
NSB003-52	1 5/8"	17	3 1/4	2 1/2	3/8	3/4
NSB003-54	1 11/16"	19	3 1/2	2 3/4	3/8	3/4
NSB003-56	1 3/4"	19	3 1/2	2 3/4	3/8	3/4
NSB003-58	1 13/16"	19	3 1/2	2 3/4	3/8	3/4
NSB003-60	1 7/8"	20 1/2	3 3/4	3	3/8	1
NSB003-62	1 15/16"	20 1/2	3 3/4	3	3/8	1
NSB003-64	2"	20 1/2	3 3/4	3	3/8	1
NSB003-68	2 1/8"	22	4 1/4	3 1/4	13/16	1
NSB003-72	2 1/4"	23 1/2	4 1/2	3 1/2	13/16	1
NSB003-80	2 1/2	23 1/2	5	3 3/4	13/16	1
NSB003-84	2 5/8"	23 1/2	5	3 3/4	13/16	1
NSB003-88	2 3/4"	24 3/4	5 1/2	4 1/2	1	1 1/4

**Features**

- Safe and suitable for use in hazardous environments to reduce the risk of producing ignitable sparks.
- Material: Copper Beryllium
- Anti-magnetic and highly corrosion resistant.
- Produced according to DIN 3113
- Die-forged

### NON-SPARKING COMBINATION WRENCH, METRIC


Copper Beryllium, 12 point

Product Code	Size (MM)	L Overall Length (Inches)	b2 Open End Width (Inches)	b1 Box End Diameter (Inches)	a2 Open End Thickness (Inches)	a1 Box End Thickness (Inches)
NSB002-6	6	4 1/4	1/2	1/2	3/16	1/4
NSB002-7	7	4 3/4	3/4	1/2	3/16	1/4
NSB002-8	8	4 3/4	3/4	1/2	3/16	1/4
NSB002-9	9	5 1/4	3/4	3/4	3/16	3/8
NSB002-10	10	5 1/4	3/4	3/4	3/16	3/8
NSB002-11	11	6	1	3/4	1/4	3/8
NSB002-12	12	6	1	3/4	1/4	3/8
NSB002-13	13	7	1 1/4	1	1/4	3/8
NSB002-14	14	7	1 1/4	1	1/4	3/8
NSB002-15	15	7 3/4	1 1/2	1	1/4	1/2
NSB002-16	16	7 3/4	1 1/2	1	1/4	1/2
NSB002-17	17	7 3/4	1 1/2	1	1/4	1/2
NSB002-18	18	8 1/2	1 1/2	1 1/4	3/16	1/2
NSB002-19	19	8 1/2	1 1/2	1 1/4	3/16	1/2
NSB002-20	20	8 1/2	1 1/2	1 1/4	3/16	1/2
NSB002-21	21	9 3/4	1 3/4	1 1/2	3/8	1/2
NSB002-22	22	9 3/4	1 3/4	1 1/2	3/8	1/2
NSB002-23	23	10 1/2	2	1 1/2	3/8	1/2
NSB002-24	24	10 1/2	2	1 1/2	3/8	1/2
NSB002-25	25	10 1/2	2	1 1/2	3/8	1/2
NSB002-26	26	11 1/2	2 1/4	1 3/4	1/2	3/4
NSB002-27	27	11 1/2	2 1/4	1 3/4	1/2	3/4
NSB002-28	28	11 1/2	2 1/4	2	1/2	3/4
NSB002-29	29	12 1/2	2 1/2	2	1/2	3/4
NSB002-30	30	12 1/2	2 1/2	2	1/2	3/4
NSB002-32	32	13 1/2	2 1/2	2	1/2	3/4

**Features**

- Safe and suitable for use in hazardous environments to reduce the risk of producing ignitable sparks.
- Material: Copper Beryllium
- Anti-magnetic and highly corrosion resistant.
- Produced according to DIN 3113
- Die-forged

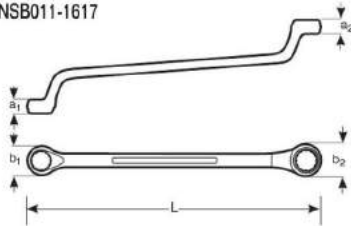



**NSB006-0607**

**NON-SPARKING DOUBLE OPEN END WRENCH, METRIC**
**Copper Beryllium**

Product Code	Size	L Overall Length (Inches)	b1 Open End Width (Inches)	a1 Open End Thickness (Inches)	b2 Open End Width (Inches)	a2 Open End Thickness (Inches)
NSB006-0607	6 x 7	3 1/2	3/8	3/16	1 1/16	3/16
NSB006-0809	8 x 9	4 1/4	13/16	1/4	7/8	1/4
NSB006-1011	10 x 11	4 1/2	19/16	1/4	1	1/4
NSB006-1213	12 x 13	5	1 1/8	1/4	1 9/16	1/4
NSB006-1415	14 x 15	5 3/4	1 1/4	3/16	1 3/8	3/16
NSB006-1617	16 x 17	6 1/4	1 3/8	3/16	1 7/16	3/16
NSB006-1819	18 x 19	7	1 9/16	3/8	1 5/8	3/8
NSB006-2022	20 x 22	7 3/4	1 11/16	3/8	1 13/16	3/8
NSB006-2123	21 x 23	7 3/4	1 3/4	3/8	1 7/8	3/8
NSB006-2426	24 x 26	8 3/4	1 15/16	7/16	2 1/8	7/16
NSB006-2528	25 x 28	9 1/4	2	7/16	2 1/4	7/16
NSB006-2729	27 x 29	9 3/4	2 1/8	1/2	2 1/2	1/2
NSB006-3032	30 x 32	10 1/2	2 3/8	1/2	2 1/2	1/2

**Features**


- Material: Copper Beryllium
- Anti-magnetic and highly corrosion resistant.
- Safe and suitable for use in hazardous environments to reduce the risk of producing ignitable sparks.


**NSB011-1617**

**NON-SPARKING OFFSET BOX END WRENCHES**
**Copper Beryllium**

Product Code	Size	Overall Length	b1 Box end Diameter (Inches)	a1 Box End Thickness (Inches)	b2 Box End Diameter (Inches)	a2 Box End Thickness (Inches)
NSB011-0607	6-7	4 1/2	7/16	1/2	1/2	1/4
NSB011-0809	8-9	5	9/16	1/2	1 1/16	3/16
NSB011-1011	10-11	5 1/2	1 1/16	5/16	5/8	3/16
NSB011-1213	12-13	6 1/4	1 3/16	3/8	1 3/16	3/8
NSB011-1415	14-15	6 3/4	1 5/16	7/16	1	7/16
NSB011-1617	16-17	8 3/4	1	7/16	1 1/8	1/2
NSB011-1819	18-19	9 3/4	1 1/8	1/2	1 3/16	1/2
NSB011-2022	20-22	11	1 3/16	9/16	1 3/8	5/8
NSB011-2123	21-23	11 1/4	1 3/16	5/8	1 3/8	5/8
NSB011-2426	24-26	13 1/2	1 1/2	3/4	1 11/16	5/8
NSB011-2528	25-28	13 3/4	1 1/2	3/4	1 3/4	5/8
NSB011-2729	27-29	14 1/4	1 1/2	3/4	1 7/8	13/16
NSB011-3032	30-32	15	1 13/16	1	1 7/8	15/16

**Features**

- Material: Copper Beryllium
- Anti-magnetic and highly corrosion resistant.
- Safe and suitable for use in hazardous environments to reduce the risk of producing ignitable sparks.


**NSB001-250**

**NON-SPARKING ADJUSTABLE WRENCH**
**Copper Beryllium**

Product Code	A Overall Length (Inches)	B Maximum Jaw Opening (Inches)	D Head Thickness (Inches)	C Jaw Tip Thickness
NSB001-150	6	3/4	1/2	3/8
NSB001-200	7 3/4	1	1/2	3/8
NSB001-250	9 3/4	1 1/4	3/4	1/2
NSB001-300	11 3/4	1 1/2	3/4	1/2
NSB001-375	14 3/4	1 3/4	1	1/2
NSB001-450	15 3/4	2 1/4	1	1/2
NSB001-600	23 1/2	2 1/2	1 1/2	1
NSB001-900	35 1/2	3	1 1/2	1

**Features**

- Material: Copper Beryllium
- Anti-magnetic and highly corrosion resistant.
- Safe and suitable for use in hazardous environments to reduce the risk of producing ignitable sparks.