

Keysight Technologies

14585A Control and Analysis Software for Advanced Power Supplies


Data Sheet



Easily Access Your Power Supply's Advanced Sourcing and Measurement Features

The Keysight Technologies, Inc. 14585A control and analysis software for advanced power supplies was designed to give you fast and easy access to the advanced sourcing and measurement functionality of your N6705 DC power analyzer and/or Advanced Power System (APS) N7900 Series power supplies without any programming. It is a flexible R&D tool for any application. It can control any of the N6700 family's more than 30 DC power modules when installed in a N6705 mainframe as well as any of the APS N7900 Series' 12 models. When used to control an N6781A SMU, it can be used for advanced battery drain analysis applications.

Compare features

N6705A, N6705B DC power analyzer	 Advanced Power System N7900 Series
<ul style="list-style-type: none">– Complements the N6705 DC power analyzer's front panel controls– Controls and analyzes data from up to four N6705 DC power analyzer mainframes and any installed modules at once – that's up to 16 power supplies simultaneously.– Controls any of the more than 30 N6700 DC power modules when installed in the N6705 DC power analyzer	<ul style="list-style-type: none">– Provides easy access to the advanced features of the N7900 without any programming– Controls and analyzes data from up to four N7900 Advanced Power System models
<ul style="list-style-type: none">– Control any combination of four N6705 or N7900 models– Four modes of operation: scope (short-term waveform capture), data logger (long-term waveform capture), CCDF (statistical analysis), and ARB (waveform creation)– Enhanced control and analysis of data – use familiar PC controls and large display– Graphical user software – no programming required– Accurately capture current drain measurements from seconds to days at up to 200,000 measurements per second (in scope mode) directly to a PC– Advanced marker readout (min, avg, max, RMS, peak-to-peak, charge/energy)– Easily create complex waveforms to stimulate or load a DUT by inputting a formula, choosing from built-in waveforms or importing waveform data– Data log measurements directly to a PC– Export data to a Microsoft Excel spreadsheet or text file– Capture a waveform, then “play” it back – use scope or data logger to capture a waveform, then use the power supply's source/sink function to reproduce it– Apply mathematic functions to waveforms– Name and choose colors for waveform traces for easy identification– Perform statistical analysis (CCDF) of power consumption	

Free
30-day
trial!

Control


Access all the features of the power supply you are connected to via a virtual front panel of the instrument or the scope, data logger, CCDF, or ARB features of the software.



14585A connected to an N7954A

Measurements: Scope and data logger modes

Setup short-term measurements using scope mode or long-term measurements using data logger mode to gain insights into your device's power consumption quickly and easily. If you know how to use an oscilloscope, you'll find the software easy and intuitive to use.

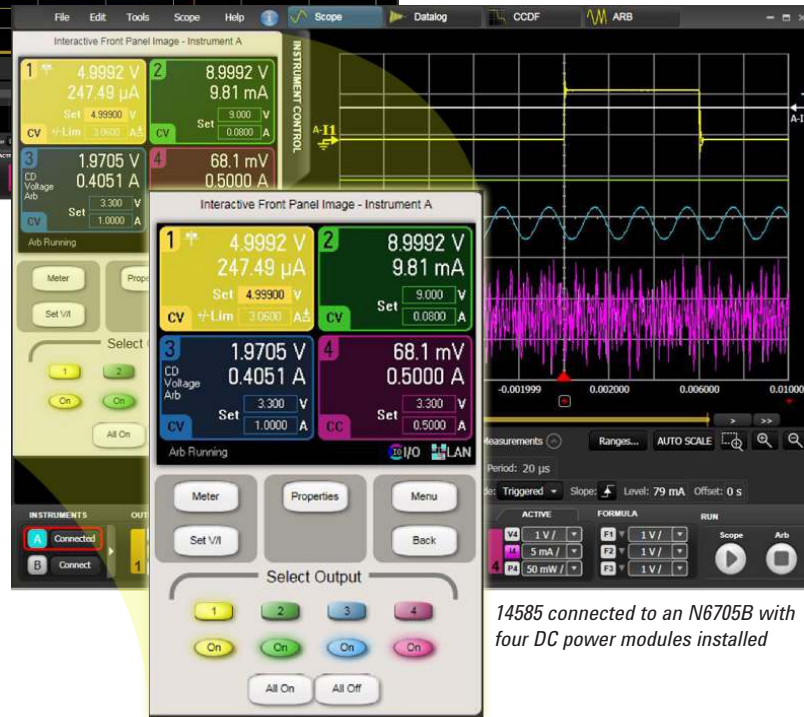


14585 connected to an N6705B with four DC power modules installed

Statistical analysis CCDF mode

To help you analyze distribution profiles, the 14585A software includes a complementary cumulative distribution function (CCDF).¹

This function provides a concise way to display long-term dynamic random current drain. It is also an effective way to quantify the impact of design changes—hardware, firmware or software—on current flows in your device.

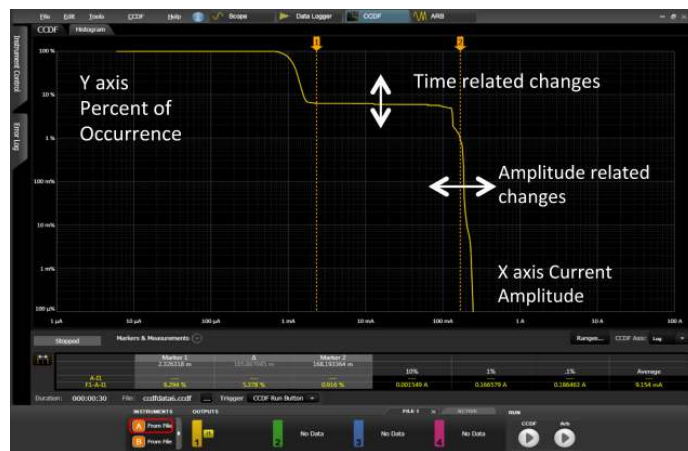


This CCDF measurement reveals the key attributes of standby current in a smartphone.

1. The CCDF value equals $(1 - CDF)$ and the CDF is the area under the probability density function (PDF) curve. Because the CDF ranges from 0 to 100 percent probability, the CCDF ranges from 100 to 0 percent probability.

Arbitrary waveforms

Easily create complex waveforms to stimulate or load a DUT by inputting a formula, choosing from built-in or importing waveform data.

Waveform generation using the 14585A

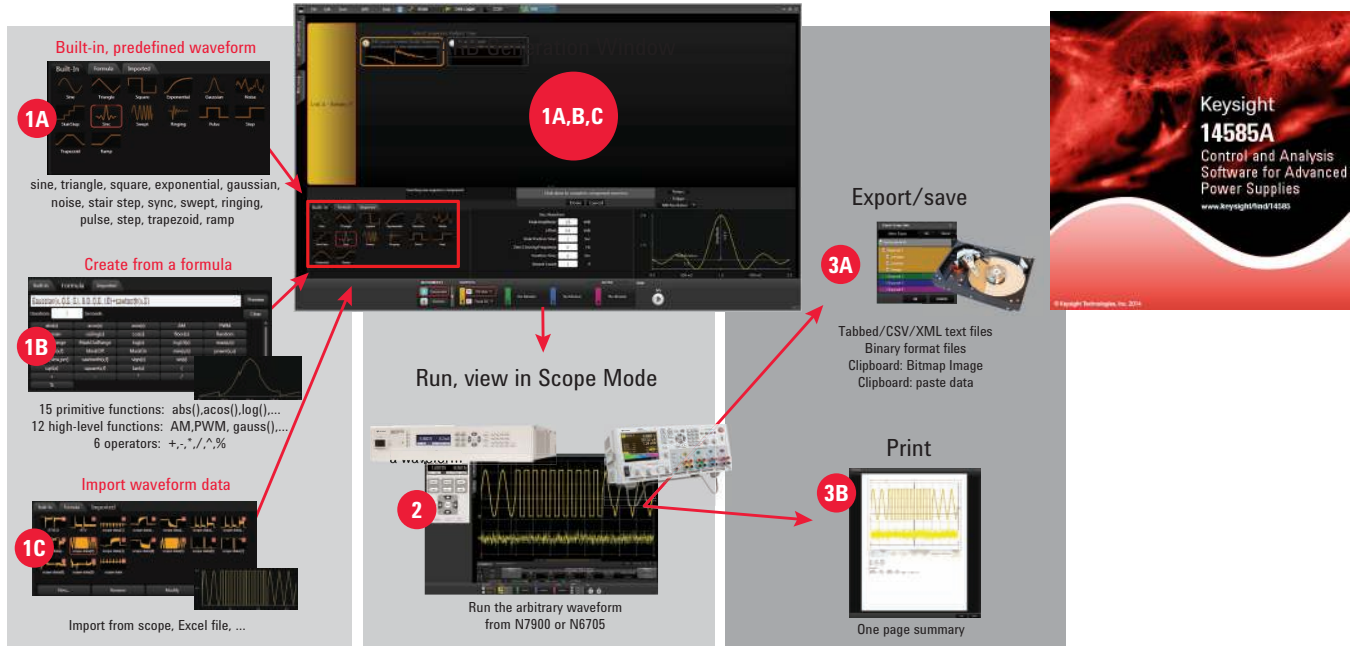


Easily create arbitrary waveforms with only a few clicks.

Record and playback – Combining the power of measurement and source/sink capabilities

Use the scope or data logger modes to capture a waveform and easily transfer the data to the ARB function of the software. Once transferred, the data can be used to reproduce the waveform via the power supply's source or sink (electronic load) capabilities.

Capturing and “playing back” data

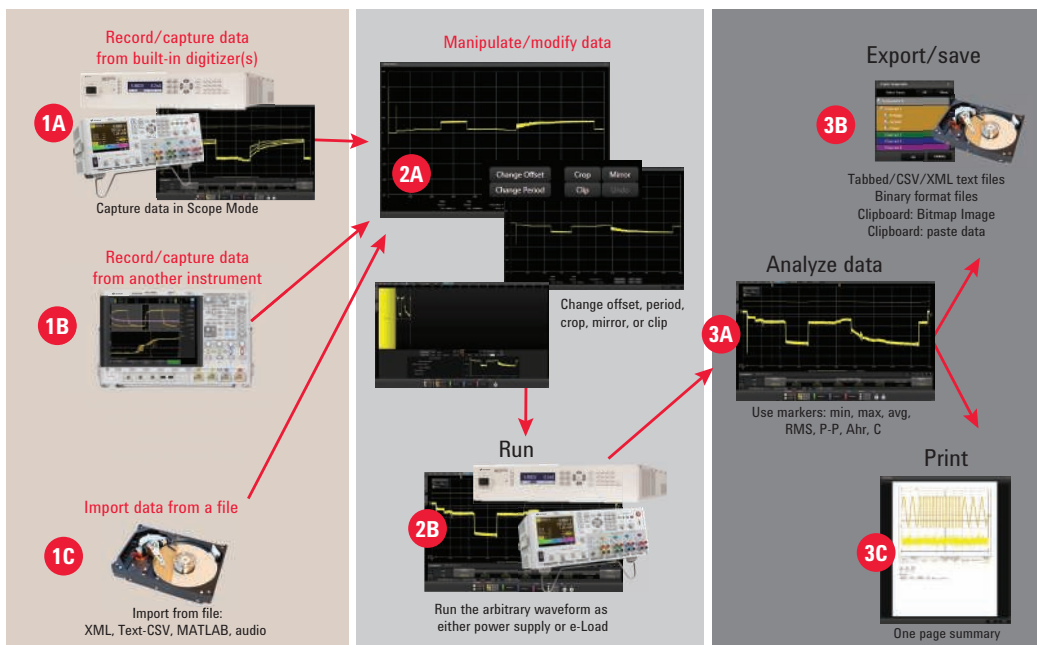

Record a waveform, then “play” it back.

Free Trial and Licensing

The 14585A software is available to download and use free of charge. A license is required when connecting the 14585A software to an N6705A/B DC power analyzer mainframe or an APS N7900 Series model. The license resides inside the instrument, not on the PC, and is specific to the instrument's model and serial number. Any copy of the 14585A software can connect to any N6705A/B mainframe and/or N7900 APS as long as the instrument has a license installed in it. Connect to your instrument for free with the built-in 30-day trial license.

How to order a license for the N6705

Situation	How to get a license
I do not own a DC power analyzer mainframe yet...	When ordering your new N6705B mainframe, add Option 056 to the order. A license will be delivered with your new N6705B mainframe.
I already own an N6705A or N6705B mainframe...	You can add a license to your currently owned N6705A or N6705B by ordering the N6705U-056. A license key will be provided to you to activate the license on your mainframe.

How to order a license for the N7900

In all cases, order product number 14585A as a separate line item.

Supported models:

N6705A, N6705B DC power analyzer mainframe
All N6700 Series DC power modules

Advanced Power System N7900 Series dynamic DC power supplies
N7950A - N7977A with or without N7909A power dissipater unit(s)

Download software at:

www.keysight.com/find/14585A

myKeysight

myKeysight

www.keysight.com/find/mykeysight

A personalized view into the information most relevant to you.

www.keysight.com/go/quality

Keysight Technologies, Inc.

DEKRA Certified ISO 9001:2008

Quality Management System

www.keysight.com/find/14585A



For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: www.keysight.com/find/contactus

Americas

Canada	(877) 894 4414
Brazil	55 11 3351 7010
Mexico	001 800 254 2440
United States	(800) 829 4444

Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 112 929
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 6375 8100

Europe & Middle East

Austria	0800 001122
Belgium	0800 58580
Finland	0800 523252
France	0805 980333
Germany	0800 6270999
Ireland	1800 832700
Israel	1 809 343051
Italy	800 599100
Luxembourg	+32 800 58580
Netherlands	0800 0233200
Russia	8800 5009286
Spain	800 000154
Sweden	0200 882255
Switzerland	0800 805353
	Opt. 1 (DE)
	Opt. 2 (FR)
	Opt. 3 (IT)
United Kingdom	0800 0260637

For other unlisted countries:
www.keysight.com/find/contactus
(BP-09-23-14)