


Features

- 11 inputs stereo mixer or stereo pre-amplifier
- 19" rack mount design of 1U height
- 6x balanced Mic/Line inputs, Aux 1-4 inputs and EMC input
- Individually Mic/Line switchable with 48V phantom power
- REC output and stereo balanced XLR outputs
- Input priority from high to low: Mic1>EMC> Mic2-5 or EMC>Mic1>Mic2-5
- 100V to 240V AC and 24V DC both power supply

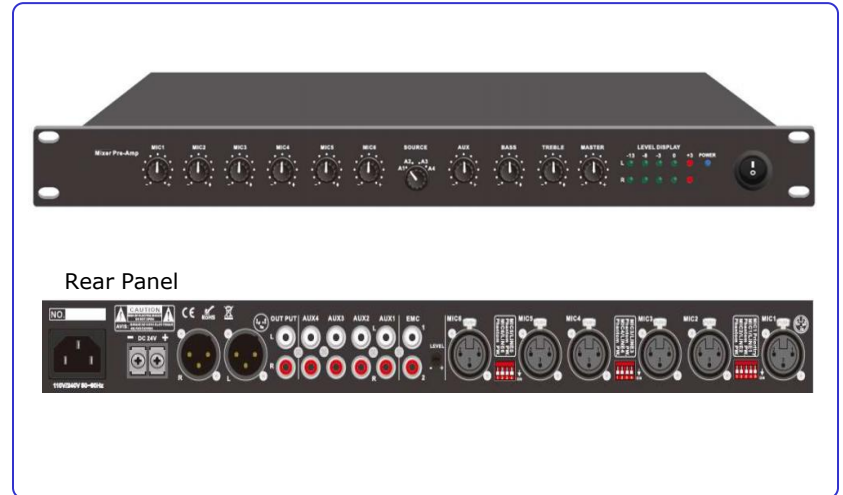

Description

The SY-P1102 is a versatile mixer or stereo pre-amplifier, which is design for public address and professional audio both applications. The stereo mixer could feed 6 balanced mic/line input and another 4 aux inputs, plus one interface with voice alarm system.

Different priority input level makes it easy for a simple conference system, each microphone input support 48V phantom power. Dual AC 110V-240V and 24V DC power supply system. Ideal for mono or two channel amplifier to set up public address system or stereo professional sound system for mosque, classroom, meeting room and hotel sound system etc.

Technical Specifications

Description	11 Inputs Stereo Mixer
Inputs	6x balanced Mic/Line inputs, XLR, 600Ω, 5mV Aux 1-4 inputs, RCA, 10kΩ, 200mV EMC input, RCA 10kΩ, 200mV
Outputs	Stereo balanced XLR, 10kΩ, 0.775mV
Frequency response	60-15KHz
THD	<0.01% at 1kHz
Frequency response	20 ~ 20 kHz
S/N ratio	> 70 dB
Priority	Mic1>EMC>Mic2-5 or EMC>Mic1>Mic2-5
Power Consumption	15 W
Power Supply	100V to 240V AC and 24V DC both power supply
Dimensions (WxHxD)	483 x 440 x 100mm
Weights	2.6 kg