



# Self-Contained Emergency KELUAR Sign

## Slimline Design (Super bright LEDs)

**PEX-138-LED**  
**PEX-138R-LED**

PEX-138-LED Surface Mount



PEX-138R-LED  
Recess Mount

### Specifications


- Model** ..... ➔ PEX-138LED / PEX-138R-LED.
- Mode** ..... ➔ Maintained.
- Weight** ..... ➔ ~2.8 Kg (surface) / ~3.0 Kg (recess).
- Battery** ..... ➔ 2 x 1.2V 1.6AH Ni-MH.
- Housing** ..... ➔ Electro-galvanised sheet steel with powder coated paint.
- Charger** ..... ➔ Constant current.
- Mounting** ..... ➔ Surface mount to wall or ceiling / Ceiling recess mount.
- Dimension** ..... ➔ 600 mm (L) x 66 mm (W) x 274 mm (H).  
651 mm (L) x 60mm (W) 283 mm (H).
- Monitoring** ..... ➔ Red LED indicator for charging.
- Compliance** ..... ➔ MS 983 : 2004, MS 619 : Part 102 : Sect. 102.22 : 1985 (P).  
MS IEC 60598-1 : 2006.  
Jabatan Bomba Dan Penyelamat Malaysia certified.
- Light Source** ..... ➔ 18 nos super bright LED (SMD).
- Input Voltage** ..... ➔ 240 V +/- 10% 50/60 Hz.
- Recharge Period** ..... ➔ 16 - 24 Hours.
- Back Up Duration** ..... ➔ 3 Hours.
- Battery Protection** ..... ➔ Low voltage cut-off to prevent over discharging.
- Power Consumption** ..... ➔ < 5W.
- Ingress Of Protection** ..... ➔ IP - 20.
- Operating Temperature** ..... ➔ 0 °C to 65 °C.



*Note : Due to continuous development and improvement, our company reserves the right to change specifications without notice.*

# MODEL PEX-138-LED / PEX-138R-LED

## Self-Contained Emergency Keluar Sign Slimline Design

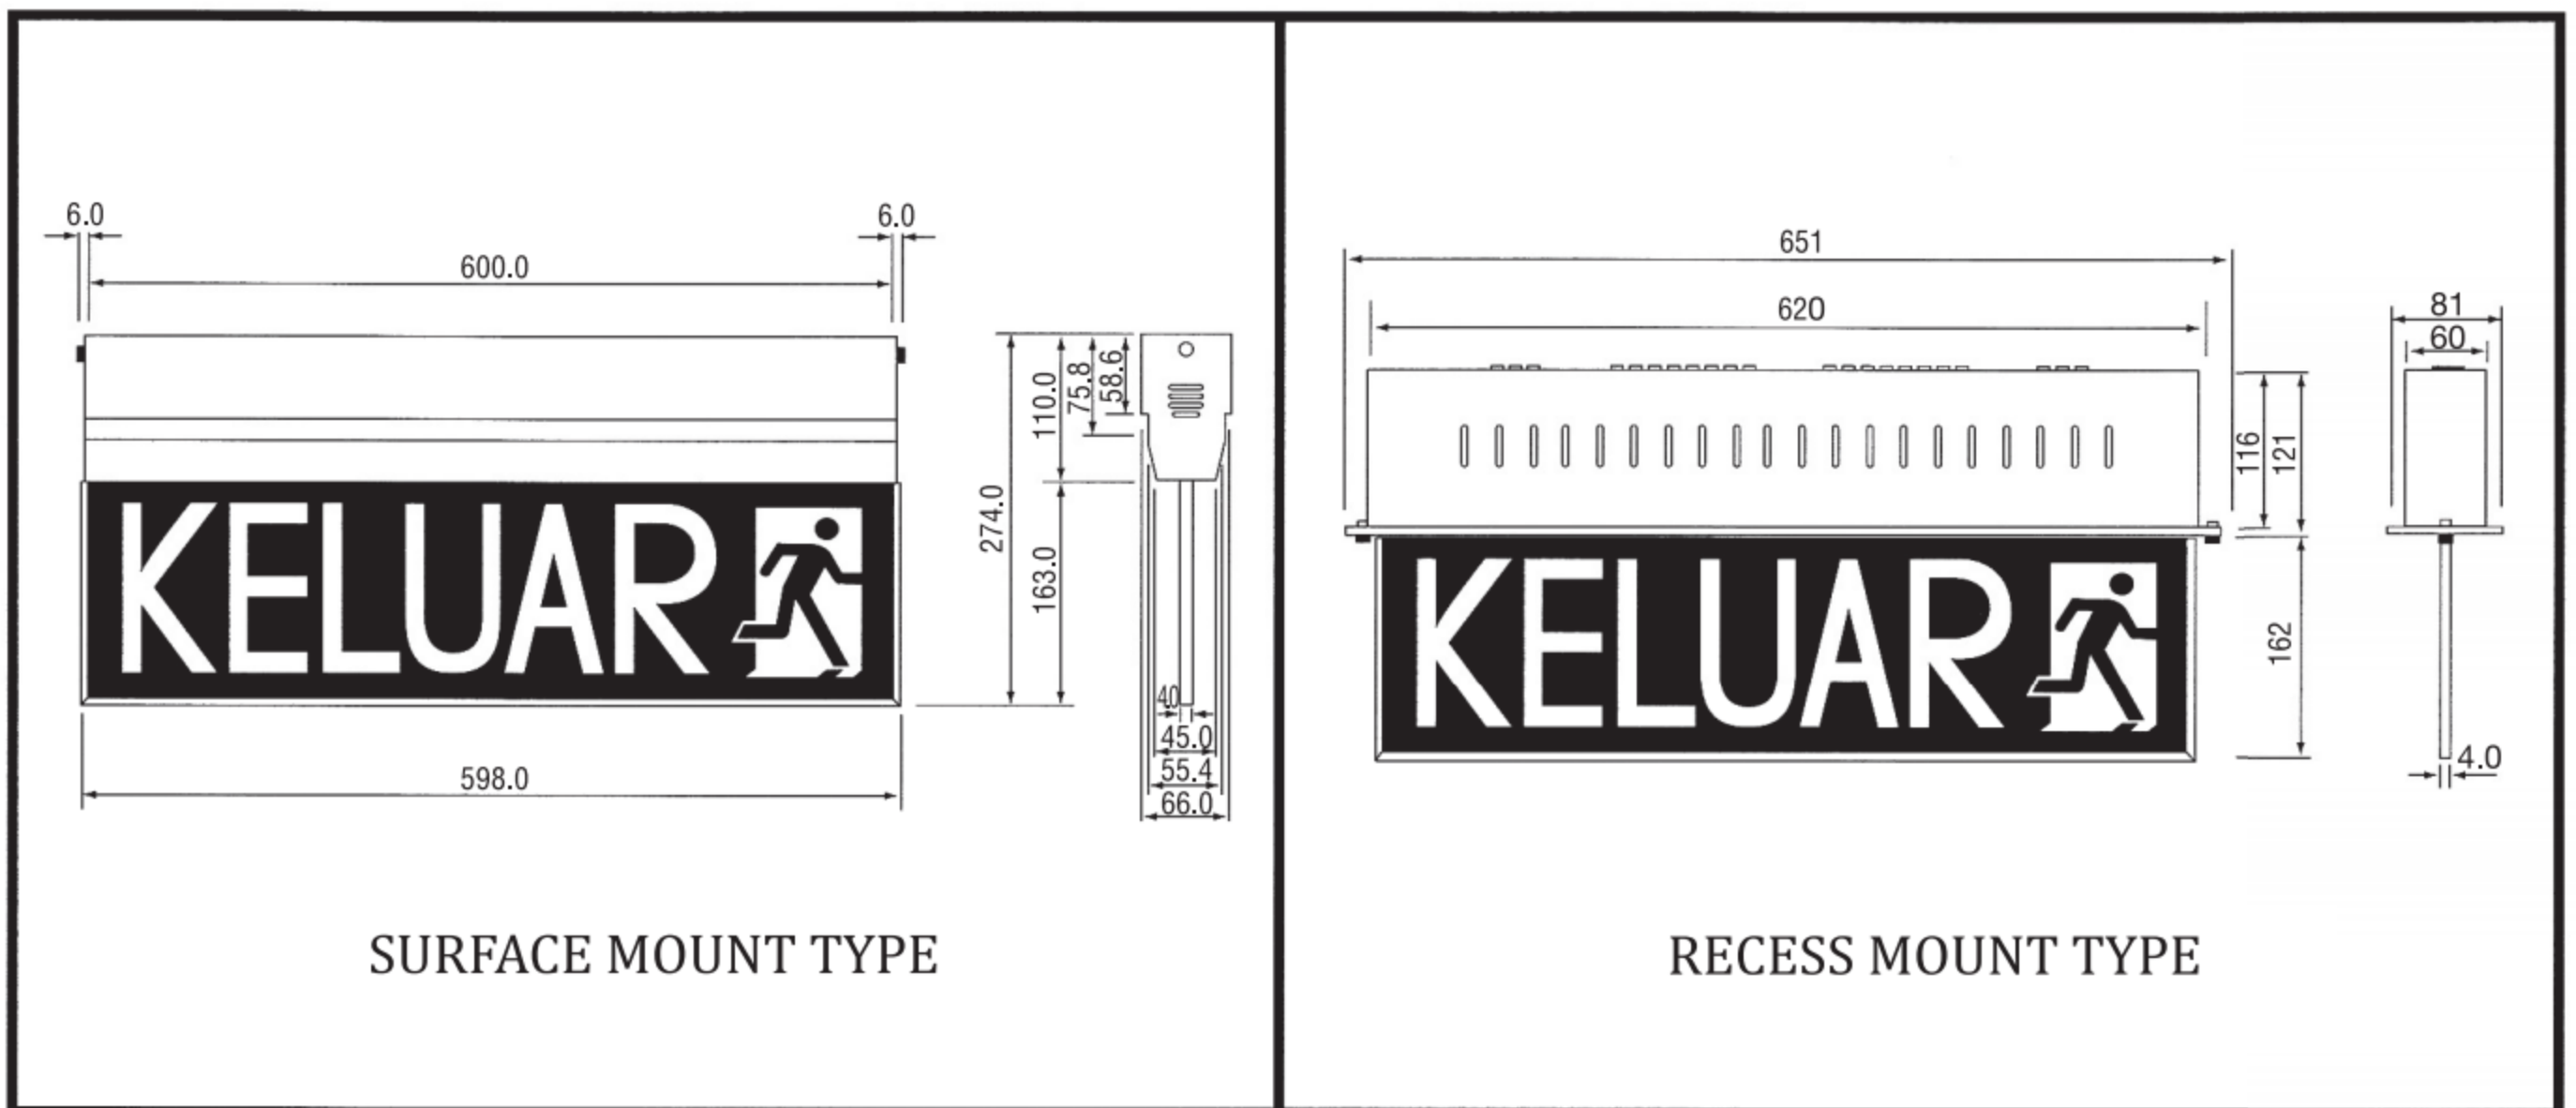

### Ordering Guide

Model	PEX – 138 – LED (Surface)	PEX – 138R – LED (Recess)	LEGEND
Normal (Standard)	PEX-138-LED	PEX-138R-LED	
Single-side Arrow To Right	PEX-138-LED/RA	PEX-138R-LED/RA	
Single-side Arrow To Left	PEX-138-LED/LA	PEX-138R-LED/LA	
Single-side Arrow Straight Ahead	PEX –138-LED/SA	PEX –138R-LED/SA	
Double-side with Arrow	PEX –138-D/LED	PEX –138RD/LED	

