

CNC-335-W30-SLIR (SA) : 2MP 30X 150m IR Starlight WDR Network Speedome



Features

Camera

- **2 Megapixel** 1920x1080 @25fps
- **H.265+** Compression
- **30x** Optical Zoom
- **Sony STARVIS Sensor**
- 120dB True **WDR**, defog, 3D,DNR
- Auto-Iris, Auto-Focus
- SMART-IR Range up to 150m
- **μSD** up to 128GB with **ANR** (Automatic Network Replenishment)


Hardware

- Weatherproof IP66
- 360° Continuous Pan
- Max 150°/s Pan Preset Speed
- Max 120°/s Tilt Preset Speed
- 0.5~80°/s Manual Pan Speed
- 0.5~70°/s Manual Tilt Speed
- 255 Programmable Presets
- 8 Tour (up to 16 presets each)
- 4 Pattern (up to 3min each)
- **1 Audio In, 1 Audio Out**
- **1 Alarm In, 1 Alarm Out**

Speedome Function

- 3D Positioning
- Power-Off Memory
- Scheduled PTZ movement
- Park action
- Privacy Mask

Dimension

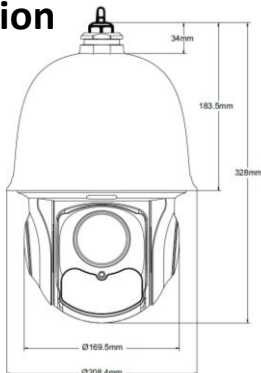

Wall Mount
SM-0808



Ceiling Mount
SM-0807



Pole Mount
SM-0501



Corner Mount
SM-0601

3000-Series IP Camera



SPECIFICATION

	Model	CNC-335-W30-SLIR (Type SA)
Camera	Image Sensor	1/2.8" SONY STARVIS Sensor
	Effective Pixels	1920x1080
	Min. Illumination	0.006Lux Color / 0.003Lux BW (F1.6, AGC On, IR Off)
	S/N Ratio	> 50dB
	Shuttle	1/25 ~ 1/100,100 @50Hz
	Day & Night	Filter Change or TDN (True Day & Night)
	Lens	Focal Length
Aperture		F1.6 ~ F3.5
Mechanism		Pan Speed
	Tilt Speed	0.5~70°/s Manual, 120°/s Preset
	Presets	255
	Tour	8 Tour (Each with max. 16 Presets)
	Park Action	Tour, Scan, Preset
In/Out	Audio	1 Line In / 1 Line Out
	Alarm	1 In / 1 Out
Network	Ethernet	10/100 Base-T, RJ45 connector
	Max. Frame Rate	25fps @1920x1080
	Audio Compression	G.711ulaw / G.711alaw / G.726
	Simultaneous Log-in	6
	3-Stream	Support
	SD Storage	Manual / Alarm Rec, up to 128GB, ANR
	User Control Level	Up to 32 Users, 3 Level (Admin, Control, View)
General	Working Environment	-30° ~ +60°C, <90° Humidity (Non-Condensing)
	Protection	IP66, 6KV surge protection
	Power	24VDC/2.5A, Max. 30W (IR On) / 15W (IR Off)
	Dimension	209mm(φ) x 328mm(H), 3.77kg

* Specification maybe changed without prior notice