


6 Zone Mixer Amplifier with Bluetooth

(NA-120R, NA-240R, NA-350R, NA-500R)

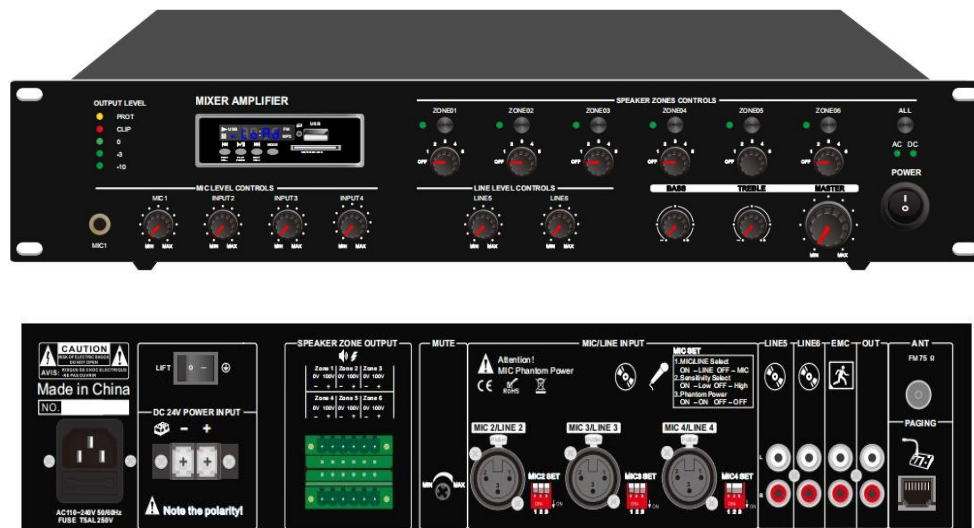

Description:

6 Zone Mixer Amplifier with MP3 and FM tuner, its rated power output from 120W, 240W, 350W to 500W, it is ideal for school, super market, bank, hotel BGM and speech use. It is all in one solution with two sources, preamplifier and mixer power amplifier into one 19" 2U height unit, which is economy but of high reliable performance.

It integrates 2 audio sources into a mixer amplifier, plus Mic1(6.3mm) and Mic/Line input 2-4 (XLR), two-line inputs, one EMC input and one RS45 input for 6 zone remote paging microphone.

Mic1 VOX with highest priority except EMC input. One USB and one SD slots on front provide easy access and operation for installer and end-user.

The amplifier is design with complete protection of overload, short circuit and high temp to avoid any damage.

These amplifiers are suitable for applications in bank, mosque, school, hotel, restaurant, theme centres and shopping centre.

Features:

- Public address (PA) 6 zone commercial mixer power amplifier.
- 19" rack mount amplifier of 2U height.
- Rated outputs of 120W, 240W, 350W to 500W.
- 6 zone speaker outputs of 100V or 70V.
- Six zone speaker outputs with independent volume control.
- Built-in MP3 player by USB & SD and FM tuner and Blue tooth
- Four microphone inputs, Mic1(6.3mm) and Mic/Line input 2-4 (XLR).
- Line 1-2 inputs on rear panel by RCA.
- EMC input on rear panel with highest priority by RCA.
- One amplifier capacity of 6 remote paging microphones FA-60RM up to 300 meters.
- Microphone1 of VOX features of highest input priority except EMC input.
- Volume control for Mic1-4 and line 1-2, bass & treble and zone volume control on front panel.
- AC and DC Power, protection, clip six zone status indicators and output level meters.
- Overload, short circuit and high temp protection.
- AC 230V and DC24V operation system.

Specification:

Model	NA-120R	NA-240R	NA-350R	NA-500R
Brand	SNAV			
Description	Public address (PA) 6 zone commercial mixer power amplifier.			
Rated Power Output	120w	240w	350w	500w
Speaker Output	70V, 100V, 6 zone speaker out 100V			
Input	Mic1-3: 600 ohms(Ω) 5-8 mV, unbalanced, Line1-2: 10k ohms(Ω) 150-470 mV, unbalanced			
Frequency Response	60-15KHz			
THD	<0.5% at 1kHz, 1/3 rated power			
S/N Ratio	Line: 85 dB , MIC: >72 dB			
Protection	High temp, short circuit, overload protection			
Power Supply	AC230V or AC110V, 50-60Hz			
Power Consumption	200W	400W	500W	600W
Dimension	418(W) $\times$ 318(D) $\times$ 88(H)mm			
Gross Weight	9.5kg	2kg	13kg	14.5kg