




Postbus/ P.O.Box 3552-6017 ZH Thom
Branskamp 12 - 6014 CB Ittervoort, Holland
Tel (31)475-560300
Fax (31)475-566144
Rek./Acc nr. 24.46.32.790
KvK Roermond nr. 13020953
BTW nr. NL005945367B01

Friction Test

Test blend

SAE Viscosity grade	5W30	5W30
SN Package additive (% w/w)	6,0	6,0
Viscotech cst (% w/w)	5,5	5,5
VII (% w/w)	0,2	0,2
Racing Additive (% w/w)	-	5,0
EHC 50 (% w/w)	64,1	60,5
EHC 110 (% w/w)	24,2	22,8
Total (% w/w)	100,0	100,0

*Coefficient of friction measured by HFRR according to MOD ASTM D6079.

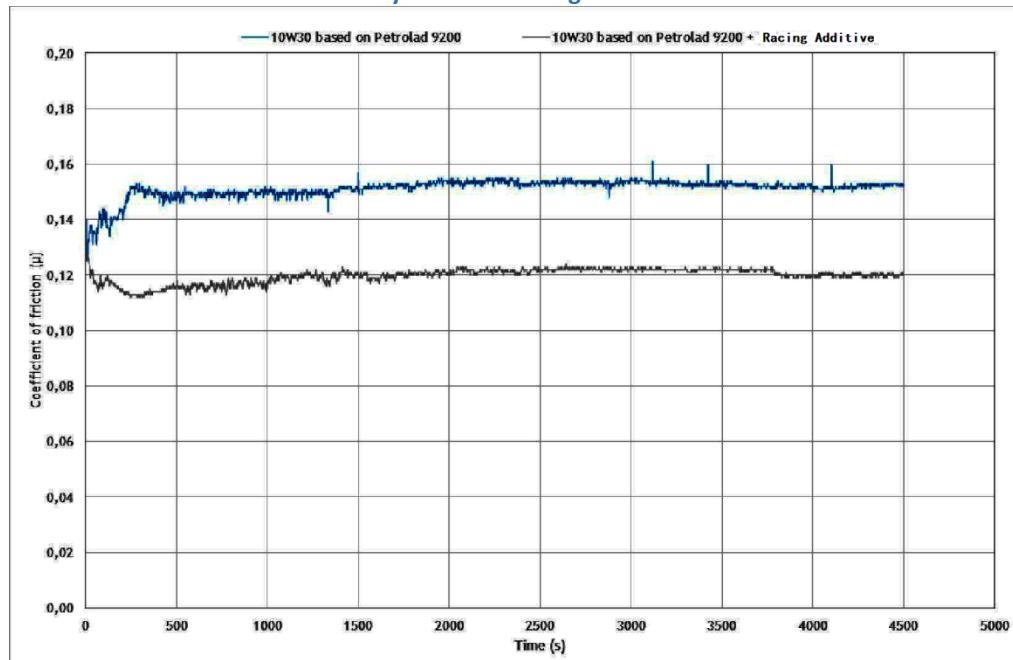

Conclusion

We have measured a reduction in friction of approx. 20% in the HFFR test when dosing 5% w/w of racing additive in the finished formulation. This is a significant decrease in the amount of force necessary to move an object over a metal surface. This property will improve the smoothness of operation, reduce buildup of heat, increase performance and reduce fuel consumption of the finished fluid when applied in engine oil. Please note that it is not advisable to use a friction modifier in driveline fluids without proper research into the application.

Op al onze transakties zijn onze verkoopvoorwaarden van toepassing welke gedeponeerd zijn bij de K.v.K te Roermond onder nr. 13020953

All transactions are subject to our General Conditions, deposited at the Chamber of Commerce at Roermond

