

*"A high quality product made from a combination of aluminium alloy extrusion, hard-wearing resilient carpet and durable vinyl"*

## 4 Choices of Framework

### Four Choices of Framework to suit your requirements:



#### DS PLATINUM MAT

- Versatile for modern construction applications
- Suitable for heavy human traffic
- Accessible for wheeled traffic
- Heel Proof

Thickness : 10mm

Recess Depth : 14mm

Weight: 12.50 kg/m<sup>2</sup>




#### DS FLEXI MAT

- Able to roll up for easy cleaning
- Good water drainage system
- Suitable for heavy human traffic
- Accessible for wheeled traffic
- Heel Proof

Thickness : 16mm

Recess Depth : 20mm

Weight: 14.10 kg/m<sup>2</sup>




#### DS ULTRA-FLEXI MAT

- A modified version of DS Flexi Mat
- Greater carpet exposure
- Optimal water absorption
- Excellent acoustic performance

Thickness : 16mm

Recess Depth : 20mm

Weight: 13.40 kg/m<sup>2</sup>



#### DS DELUXE MAT

- The latest design of DS Series
- Slim line yet stunning in performance
- Able to roll up for easy cleaning
- Excellent acoustic performance

Thickness : 16mm

Recess Depth : 20mm

Weight: 14.30 kg/m<sup>2</sup>



## DS Platinum Mat

DS Platinum Mat is the perfect solution for mass market application. They are commonly used in supermarkets, hotels, schools, private residential buildings, banks, government offices, markets, toilet entrances, where dirt trapping is the first priority.

There is a wide range of colours to choose to match the surrounding floor finishes. Carpets inserts or Vinyl inserts can be specified individually or in combination to be fitted into the aluminium treads. The rigid structure ensures complete silence while in use. Among all, this mat has the most un-complex structure which makes it most economical and popular.





- Versatile for modern construction applications
- Suitable for heavy human traffic
- Accessible for wheeled traffic
- Heel Proof




Shopping Mall

# Specifications

Model	DS Platinum Mat
Thickness	10mm
Carpet Threads	100% Polypropylene with Acrylic Resin Lock Coat
Carpet Texture	Velour
Flammability	Tested to AS 1503.3
L AngleFrame	12mm x 25mm x 3mm thick made of aluminium extrusion grade 6063-T6
Filler Block	Up to 10mm thick made of aluminium extrusion grade 6063-T6
Aluminium Rail	50mm wide made of aluminium extension grade 6063-T6
Base Cushion	Polyvinyl Chloride (Black) Shore A (60 deg +/- 5)

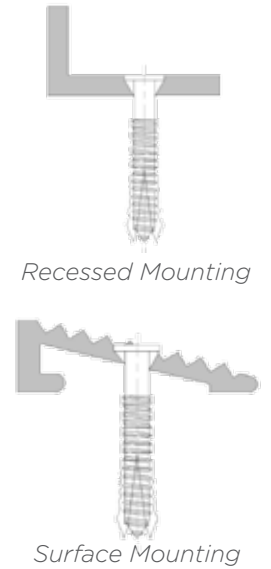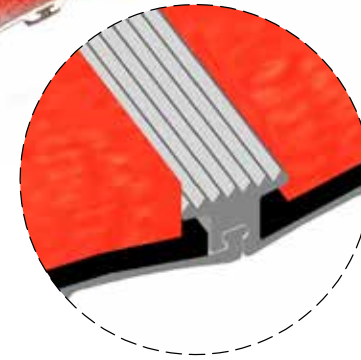

### Available Aluminium Rail Finishes:

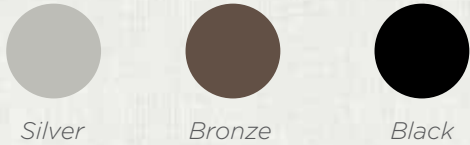

### Insert Options

