

MOVED

COOL AS YOU GO



ACSON[®]
International
Air Conditioners

MOVEO

COOL AS YOU GO

Acson Moveo is the synonyms to mobile and ease. It is a packaged unit where the evaporating and condensing unit are in a single body. It is the perfect spot cooling without the need of a centralized air conditioner unit which is energy efficient. Equipped with caster wheels, it is easily moveable when a permanent installation is not desired. The set up takes only 5 minutes without the need of tools, hacking or drainage. Cool as you go.



Easily moveable with
caster wheels at your
own pleasure



No manual drainage
is required



So light & convenient
to be brought
everywhere



Fast cooling to
provide cool comfort



Installation & Accessories Included:



Acson Moveo comes with a set of installation and accessories for your convenient.

- Window bracket
- Air exhaust hose
- Window outlet
- Caster locks
- Suction pad
- Wall flange cap
- Drainage stopper
- Remote controller



Model: **A5PA 10/15C**

Cooling Capacity: **10,000 BTU/h - 12,000 BTU/h**

Power Input: **1.13kW - 1.2kW**

Specifications

Model			A5PA 10C	A5PA 15C
Nominal cooling capacity	BTU/h		10,000	12,000
	kW		2,931	3,517
Nominal Total Input Power	W		1,130	1,200
Nominal Running Current	A		4.9	5.4
EER	Btu/hr/W		8.85	10.00
	W/W		2.59	2.93
Power Source	V/Ph/Hz	220 - 240V / 1 / 50		
Control	Operation	CONTROL PANEL & WIRELESS REMOTE CONTROL		
Air Flow	High	l/s (CFM)	83.3 (176.6)	
	Medium	l/s (CFM)	77.8 (164.8)	
	Low	l/s (CFM)	69.4 (174.1)	
Sound Pressure Level (H/M/L)	dBA		52 / 51 / 50	53 / 52 / 51
Water Tank Volume	L		0.6	
Unit Dimension	Height	mm (in)	715 (28.15)	
	Width	mm (in)	435 (17.13)	
	Depth	mm (in)	350 (13.78)	
Packing Dimension	Height	mm (in)	880 (34.65)	
	Width	mm (in)	485 (19.09)	
	Depth	mm (in)	395 (15.55)	
Unit Weight	kg (lb)		29 (63.93)	30 (66.14)
Refrigerant Type			R410A	

1. All specifications are subject to change by the manufacturer without prior notice.
2. Nominal Cooling Capacity is based in the conditions: Cooling 35°C DB / 28.3 WB
3. Sound Pressure Level is according to GB/T7725-2004 standard. Position of the measurement point is 1m from the outlet.
4. Unit is complied to international standard ANSI_ASHRAE 128-2001.


Features

Plug & Play



You can carry the Acson Moveo to any place at anytime and no permanent installation required. It is equipped with caster wheels and can be moved around from one place to another easily.

D.I.Y Installation

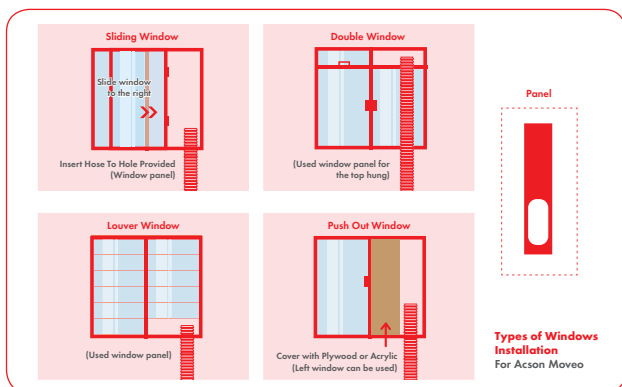


No Manual Drainage



Acson Moveo uses double condenser technology to evaporate all excessive water. The condensate water will be automatically evaporated through the internal splashing equipments. The special fogging technology also allows the condenser to be cooled faster for higher energy efficient.

Double Condenser Technology

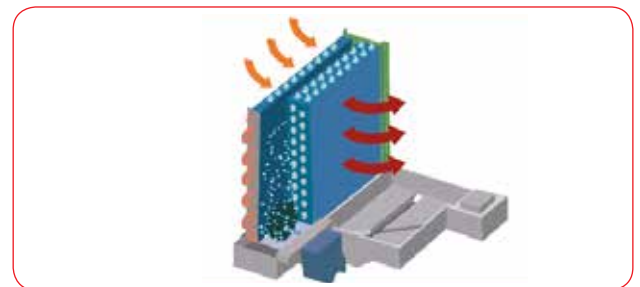

Power Failure Memory System



Automatically keeps last setting condition in the event of a sudden power failure with intelligent self diagnosis system, errors will be detected and error messages are displayed on the appliance display.

Refreshing Every Minutes



Silver ion eliminates and prevents bacteria, fungi, spores and virus growth by destroying the inner configuration and absorbing the cell elements. Thus giving you a healthy and clean environment.

ACSON[®]
International
Air Conditioners

ACSON MALAYSIA SALES & SERVICE SDN.BHD. (129688-D)

a member of **DAIKIN** group

Lot 4, Lorong 19/1A, Seksyen 19, 46300 Petaling Jaya,
Selangor Darul Ehsan, MALAYSIA.

Tel : +603 7964 8200 Sales Fax : +603 7956 9909

Service Fax : +603 7956 9907 Acson Careline : 1300 22 3344

Penang	: +604-5377 176	Pahang	: +609-5178 696
Perak	: +605-3129 828	Kelantan	: +609-7405 233
Melaka	: +606-2926 196	Sarawak	: +6082-344 128
Johor	: +607-3551 599	Sabah	: +6088-420 205

www.acson.com.my

Authorized Dealer :

Products manufactured in an ISO certified facility.
This document contains the most current product information as of this printing.
For the most up-to-date product information, please logon to www.acson.com.my