

SW8FP


8 CHANNEL POE SWITCH



KEY FEATURES

- 1 SFP Port * 1000Mbps
- 1 Port * 1000Mbps
- 8 POE port * 100Mbps
- Transmission distance up to 150m (CAT5 / 5E / 6)
- Transmission distance up to 250m in CCTV Mode (bandwidth: 10Mbps)
- Transmission speed 10 / 100Mbps / 1000Mbps
- Redundant Power Design

TECHNICAL DIAGRAM

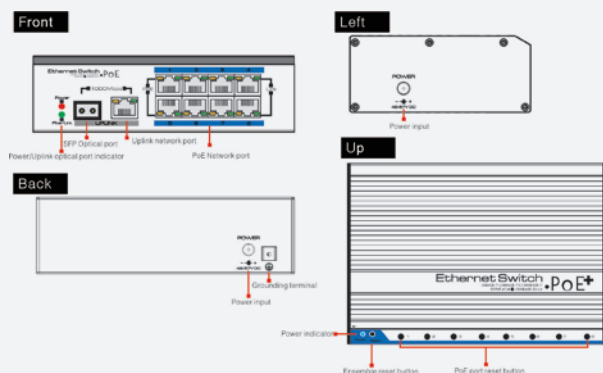

TECHNICAL SPECIFICATIONS

NETWORK CONNECTOR

Port	1~8 Ethernet Port: 10/100Mbps Uplink Port: 10/100/1000Mbps SFP: 1000Mbps Optical Fiber SFP module port
Transmission Distance	1~8 port:150m Up Link Port: 0 - 150m Transmission distance up to 250m in CCTV Mode (bandwidth: 10Mbps) SFP: Depend on the optical module transmission performance
Transmission Medium	Cat5/5e/6 standard network cable
PoE Protocol	IEEE802.3af/at
PoE Power Supply	End-span
PoE Power Consumption	each port supports Max output 30W; provide standard 120W power adapter; higher power adapter is needed for higher power demand

NETWORK SWITCH

Standard	IEEE802.3 10BASE-T, IEEE802.3u 100BASE-TX, IEEE802.3ab 1000BASE-TX; IEEE802.3z 1000-SX/LX; IEEE802.3 X
Switch way	Store and forward
Packet Data Cache	1M
Mac Address List	8K

PROTECTION

Lightning Protection	Level 3 per: IEC61000-4-5
ESD	1a contact discharge 3 level 1b air discharge 3 level Per:IEC61000-4-2

SYSTEM

Power Consumption	<5W
Power Adapter Voltage	DC 48V~57V
Temperature	-10°~ 55°C
Humidity	0 ~ 95%
Dimension (l x w x h)	159mm * 110mm * 46.5mm
Weight	570g