


IHX20-18X VIRTUE SERIES

AHD SPEED DOME CAMERA (OUTDOOR)



KEY FEATURES

- 1/3" Sony Exmor CMOS IMX323
- 1080P AHD Speed Dome Camera
- Optical 18X Zoom
- Min. 0.001Lux with DSS(x4)
- Digital Zoom (32x)
- WDR
- Transmission distance up to 500m
- 8 Pcs IR Led
- IR Distance 100m
- Day & Night
- ICR
- Defog
- DIS (Digital Image Stabilizer)
- Weather Proof (IP67)

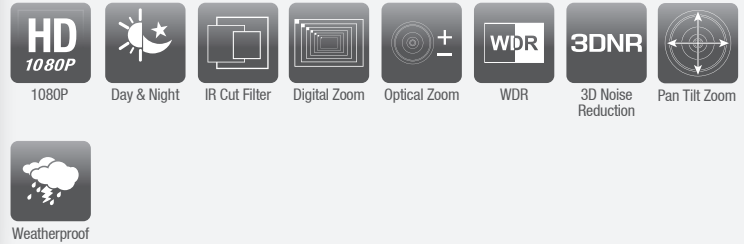

TECHNICAL SPECIFICATIONS

| | |
|---------------------------|--|
| Image Sensor | 1/3" Sony Exmor CMOS IMX323 |
| Maximum Image Resolution | 1920*1080 & 1280*720 25&30hz |
| Minimum Illumination | 0.01Lux @(F1.2,AGC ON) , 0Lux with IR ON |
| IR LED | 8 |
| Lens | 18X Zoom, 4.7 to 84.6mm |
| S/N Ratio | ≥50dB(AGC OFF) |
| Electronic Shutter | Auto/ 1/50-1/10,000s |
| Horizontal Rotation Speed | 360° Rotation |
| Vertical Rotation Speed | 0-90° |
| Rotation Speed | Horizontal Speed 0.05-60°/s,Vertical 0.05-40°/S |
| Overturn | When camera be leaning to 90°, it can be 180° rotation |
| Preset | 255 units |
| Cruise Scanning | 4 Units |
| Pattern Scanning | 8 Units |
| LR Scanning | 7 Units |
| Protocol | PELCO-P/D、coaxial control |
| IR Distance | Max. 100m |
| Control Interface | RS485 Interface |
| Power Supply | 12V DC/3A |
| Power Consumption | ≤30W |
| Thunder Prevention Rate | Instantaneous voltage +/-6KV |
| Rating | IP67 |
| Working Temperature | Indoor (0~+40°C), Outdoor (-40~+~60°C) |
| Package | 310 * 310 * 480mm |
| Humidity | ≤95% without condensation |
| Weight | 7KGS |

IMAGE SETTING

- | | |
|---------------------------|------------------|
| Backlight Compensation | Internal(ON/OFF) |
| Power off Memory Function | Support |
| Guard Function | Support |

