

NVS32-8

VIRTUE SERIES

NETWORK VIDEO RECORDER



compatible with:



KEY FEATURES

- 32 channel input
- Third-party IP cameras supported with ONVIF conformance
- Support 2-ch HDMI, 1-ch VGA, 1-ch CVBS, HDMI2 at up to 4K(3840x2160) resolution
- Up to 12 Megapixels resolution recording
- Support H.265/H.264 video formats
- Accurate retrieval, instant playback
- 8 SATA HDDs, Up to 8TB for each HDD
- Support various VCA detection alarm and VCA search
- Support N+1 Hot space
- Support for 12V Power output
- Support for P2P, UPnP, NTP, DHCP, PPPoE
- Support for mobile client access

FEATURES IMAGES

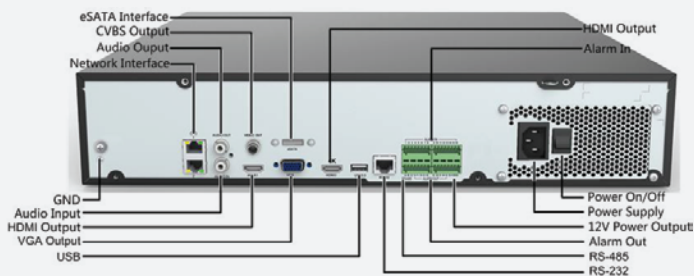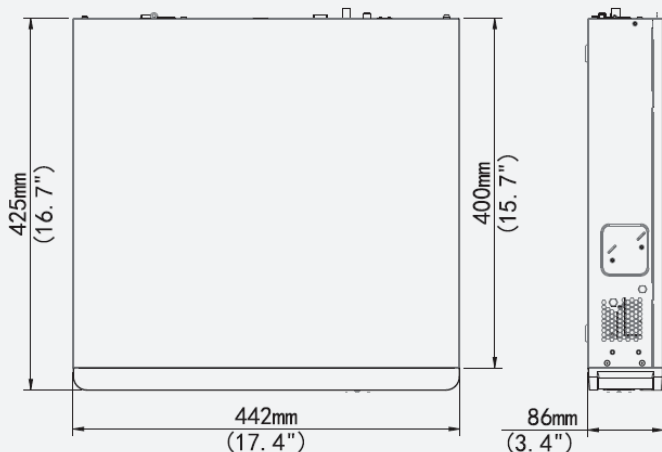

TECHNICAL SPECIFICATIONS

IP Video Input	32-ch
Two-way audio Input	1-ch, RCA
Incoming Bandwidth	320Mbps
Outgoing Bandwidth	320Mbps
Remote Connection	128
HDMI/VGA Output	HDMI1/VGA: 1920x1080p /60Hz, 1920x1080p /50Hz, 1600x1200 /60Hz, 1280x1024 /60Hz, 1280x720 /60Hz, 1024x768 /60Hz
HDMI2:4K (3840x2160) /60Hz, 4K (3840x2160) /30Hz, 1920x1080p /60Hz, 1920x1080p /50Hz, 1600x1200 /60Hz, 1280x1024 /60Hz, 1280x720 /60Hz, 1024x768 /60Hz	
CVBS Output	1-ch, BNC
Audio Output	1-ch, RCA
Recording Resolution	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Synchronous Playback	16-ch
Compression	H.265/H.264
Live View/ Playback Capability	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF 4 x 12MP@20, 4 x 4K@30, 8 x 4MP@20, 16 x 1080P@25, 32 x 720P@25,64 x D1
SATA	8 SATA interfaces
Capacity	up to 8TB for each HDDs
Network Interface	2 RJ-45 10M/100M/1000M self-adaptive Ethernet Interfaces
Network Function	HTTP, TCP/IP, IPV4, UPnP, RTSP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, PPPoE, DDNS, FTP, IP Server, P2P
Serial Interface	1 x RS-232, 1 x RS-485
USB Interface	Front panel: 2 x USB2.0, Rear panel: 1 x USB3.0
Alarm In	16-ch
Alarm Out	4-ch
Power Supply	100 ~ 240 VAC
Consumption w/o HDD	≤ 20 W
Working Temperature	-10°C ~ + 55°C (+14°F ~ +131°F)
Working Humidity	10% ~ 90%
Dimension	86mm × 442mm × 425mm (3.4" × 17.4" × 16.7")
Weight w/o HDD	≤ 5.13 Kg (11.31 lb)