

Luminaire Specifications

Power	10W, 30W, 50W, 100W, 150W, 200W
Input Voltage	AC220 – 240V 50/60Hz
Fitting Color	Black
Material	Die-cast Aluminum, Tempered Glass
Ingress Protection	IP 65
Operating Temperature	20 - 50°C

Product Features

- Long lifetime
- Energy-efficient lighting
- High-performance led chip Lumileds
- energy saving, high light efficiency.
- High CRI, intuitive display, different color temperature for option.

Application


- Outdoor area
- Corridors, comercial and household area
- Spot and flag pole
- Building faced general parking
- Tunnel



Code	Watt	Lumen	Size	Degree
HLP-FLU-10DN-PZ-V	10W	821.7 Lm	115*135*40 mm	120°
HLP-FLU-30DN-PZ-V	30W	2615.2 Lm	195*230*55 mm	120°
HLP-FLU-50DN-PZ-V	50W	4183.1 Lm	235*280*70 mm	120°
HLP-FLU-100DN-PZ-V	100W	8685.7 Lm	300*350*85 mm	120°
HLP-FLU-150DN-PZ-V	150W	12657.2 Lm	325*430*110 mm	120°
HLP-FLU-200DN-PZ-V	200W	16737.2 Lm	325*430*110 mm	120°

LED Technical Data

Light LED Source	Lumileds LUXEON 3030 2D
Color Temperature	3000K Warm White 4000K Nature White 5700K Cool White
Rendering Index	>RA 70
LED life cycle	LM80 52,000hours @ 35°C

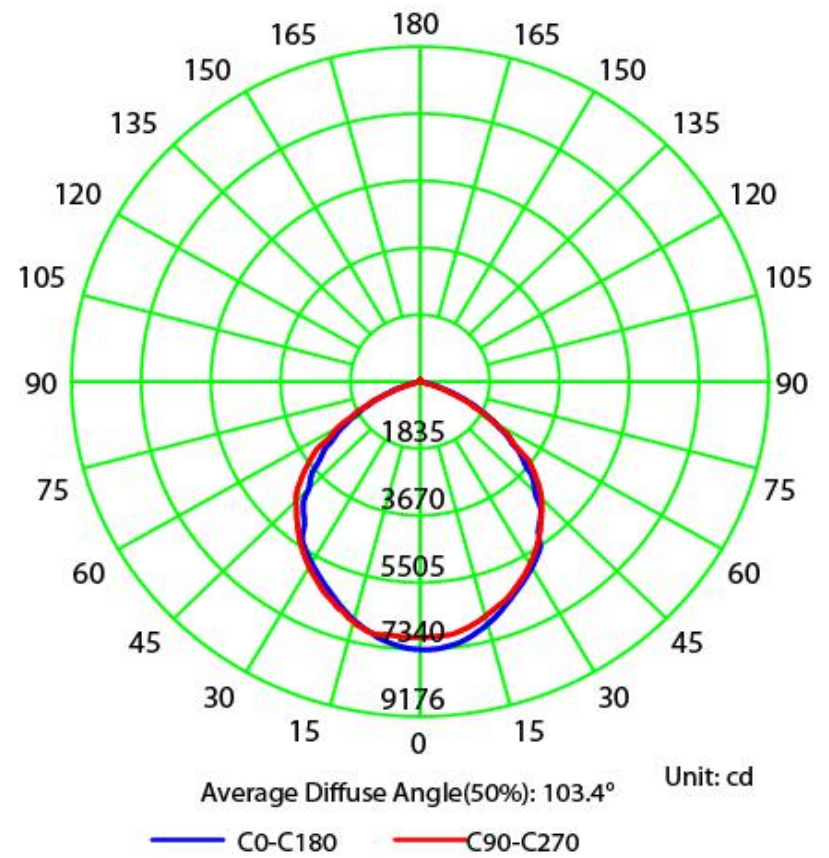

LED Driver Technical Data

LED Driver Brands	HL Platinum
Power Factor	>0.9
Life Cycle	> 20,000 hours

