



# High Bay Light FIN TYPE



## Luminaire Specifications

Power	80W, 100W
Fitting Color	Sliver
Material	Pure aluminum Fin type, polycarbonate
Ingress Protection	IP 20
Input Voltage	AC220 – 240V 50/60Hz
Operating Temperature	20 - 50°C

## Product Features

- Energy-efficient lighting for industrial and commercial applications.
- High CRI, intuitive display, different color temperature for option.
- High thermal conductivity Pure aluminium Fin type
- High performance, High efficiency
- Long lifetime

## Application


- Warehouse
- Factory
- High ceiling corridor
- Multipurpose hall
- Auditorium
- Shopping Complex



Code	Watt	Lumen	Size (Ø *H)	Degree
HLP-HBQS-80DN-ZZ-V	80W	8694.4 Lm	400*260mm	120°
HLP-HBQS-100DN-ZZ-V	100W	9794.7 Lm	400*260mm	120°

### LED Technical Data

Light LED Source	Led SMD 2835
Color Temperature	3000K Warm White 4000K Nature White 5700K Cool White
Rendering Index	>RA 80
LED life cycle	LM80 52,000hours @ 35°C

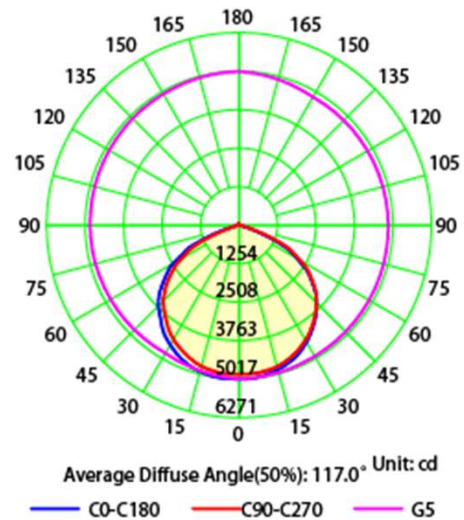

### LED Driver Technical Data

LED Driver Brands	HL Platinum
Power Factor	>0.9
Life Cycle	> 20,000 hours

