



Luminaire Specifications

Power	100W, 200W
Input Voltage	AC220 – 240V 50/60Hz
Fitting Color	Black
Material	Pure Aluminium, Tampered Glass
Ingress Protection	IP 65
Operating Temperature	20 - 50°C

Product Features

- Long lifetime
- Energy-efficient lighting
- High-performance led chip Lumileds
- energy saving, high light efficiency.
- High CRI, intuitive display, different color temperature for option.

Application


- Exhibition Halls
- Car Park
- Building Façade
- Public Corridor
- Stair Corridor



Code	Watt	Lumen	Size	Degree
SL-FLQB-100DN-PP-V	100W	10087 Lm	260*270*165 mm	120°
SL-FLQB-200DN-PP-V	200W	18707 Lm	330*380*178 mm	120°

LED Technical Data

Light LED Source	Lumileds LUXEON 3030 2D
Color Temperature	3000K Warm White 4000K Nature White 5700K Cool White
Rendering Index	>RA 70
LED life cycle	LM80 52,000hours @ 35°C

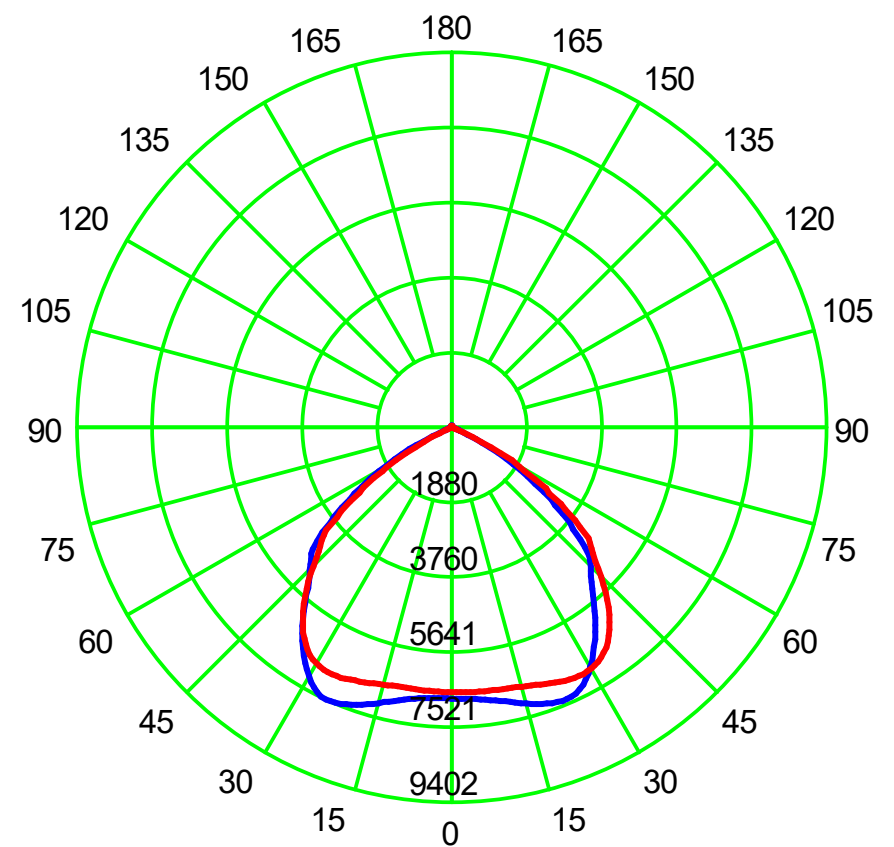

LED Driver Technical Data

LED Driver Brands	Philips Xitanium / Meanwell
Power Factor	>0.9
Life Cycle	>50,000 hours
Certificate	EN61000 , EN61347-1, EN 61347-2-13

