



## Luminaire Specifications

Power	10W, 18W
Input Voltage	AC220 – 240V 50/60Hz
Fitting Color	Silver
Material	Pure Aluminum, Polycarbonate
Base Type	G13
Ingress Protection	IP 20
Operating Temperature	20 - 50°C

## Product Features

- Smart design, automatically work for saving energy.
- Long lifetime, Energy-efficient lighting.
- Energy saving, high light efficiency.
- High thermal conductivity aluminium.

## Application


- Car Parks
- Staircases
- Corridors
- Walkways
- Lobbies



Code	Watt	Lumen	Size	Degree
HLP-T8CLM-EC-10DN-V	10W	908 Lm	600*30 mm	150°
HLP-T8FRM-EC-10DN-V	10W	804 Lm	600*30 mm	150°
HLP-T8CLM-EC-10DN-V	18W	1816 Lm	1200*30 mm	150°
HLP-T8FRM-EC-10DN-V	18W	1 608 Lm	1200*30 mm	150°

## LED Technical Data

Light LED Source	Everlight Led 2835
Color Temperature	3000K Warm White 4000K Nature White 6500K Cool White
Rendering Index	>RA 80
LED life cycle	LM80 52,000hours @ 35°C

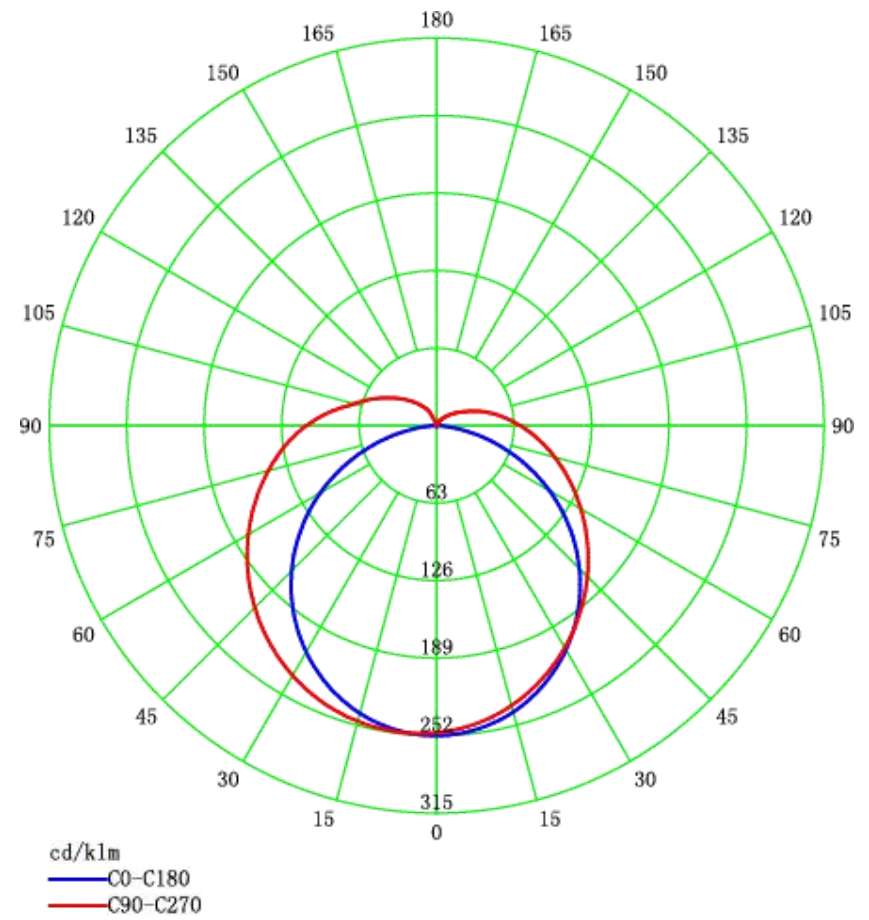

## LED Driver Technical Data

LED Driver Brands	HL Platinum
Power Factor	>0.9
Life Cycle	>20,000 hours
Sensor Stand by Time	30s
Stand By Mode Watt	3W

