

Luminaire Specifications

Power	3W, 6W, 9W 6W, 12W, 18W
Input Voltage	AC220 – 240V 50/60Hz
Fitting Color	Black, Grey
Material	Die Cast Aluminum, Glass
Ingress Protection	IP 43
Operating Temperature	20 - 50°C

Product Features

- High quality aluminium radiator
- High efficiency of heat dissipation
- 2 heads shine up and down or 1 head shine down.
- Difference design


Application

- Garden
- Street sidewalk
- Home
- Hotel
- Resturant
- Bar

Code	Watt	Lumen	Size	Degree
JDC-WLX-3US-V	3W	250 Lm	65*115*100 mm	30°
JDC-WLX-6US-V	6W	500 Lm	90*155*115 mm	30°
JDC-WLX-9US-V	9W	750 Lm	110*175*167 mm	30°
JDC-WLX-3UDS-V	6W	500 Lm	65*115*100 mm	30°
JDC-WLX-6UDS-V	12W	1000 Lm	90*155*115 mm	30°
JDC-WLX-9UDS-V	18W	1500 Lm	110*175*167 mm	30°

LED Technical Data

Light LED Source	High power led
Color Temperature	3000K Warm White 5700K Cool White
Rendering Index	>RA 70
LED life cycle	30,000hours @ 35°C

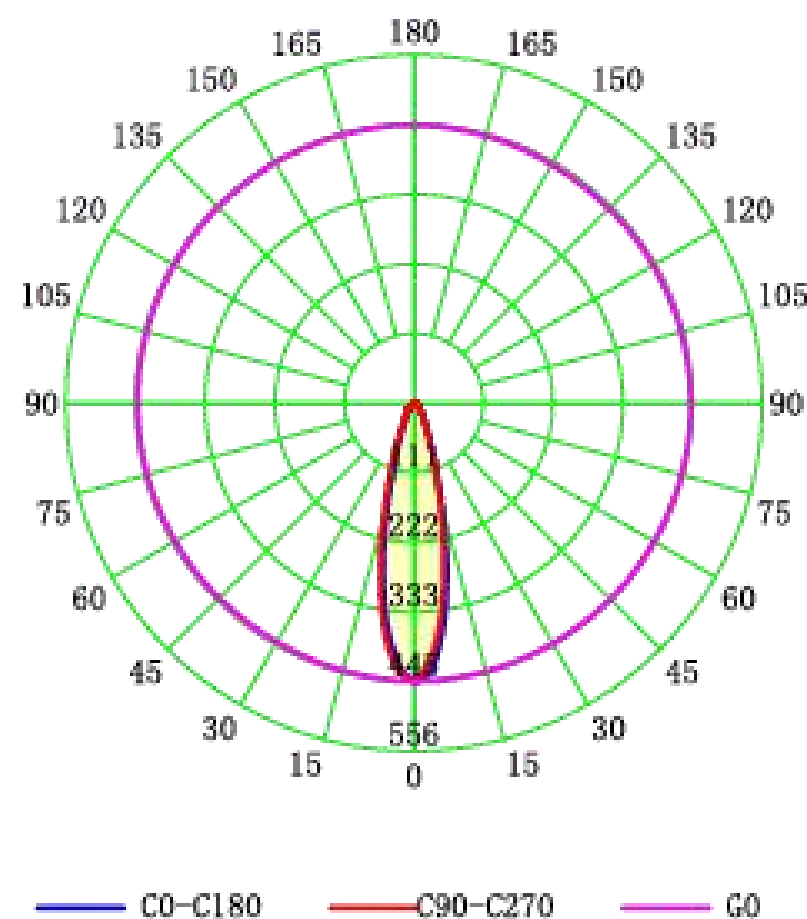

LED Driver Technical Data

LED Driver Brands	JDC
Power Factor	0.5
Life Cycle	> 10,000 hours

