



### Luminaire Specifications

Power	10W, 30W, 50W, 70W, 100W
Input Voltage	AC220 – 240V 50/60Hz
Fitting Color	Black
Material	Die-cast Aluminum, Tempered Glass
Ingress Protection	IP 65
Operating Temperature	20 - 50°C

### Product Features

- Long lifetime
- Energy-efficient lighting
- High-performance led chip energy saving, high light efficiency.
- High CRI, intuitive display, different color temperature for option.

### Application


- Exhibition Halls
- Car Park
- Building Façade
- Public Corridor
- Stair Corridor



Code	Watt	Lumen	Size	Degree
JDC-FL01-V	10W	750 Lm	112*80*40 mm	120°
JDC-FL03-V	30W	2250 Lm	180*240*45 mm	120°
JDC-FL05-V	50W	3750 Lm	230*280*50 mm	120°
JDC-FL07-V	70W	5250 Lm	280*305*60 mm	120°
JDC-FL10-V	100W	7500 Lm	280*305*60 mm	120°

## LED Technical Data

Light LED Source	Led SMD 2835
Color Temperature	3000K Warm White 4000K Nature White 5700K Cool White Red, Blue, Green, Amber
Rendering Index	>RA 70
LED life cycle	50,000hours @ 35°C

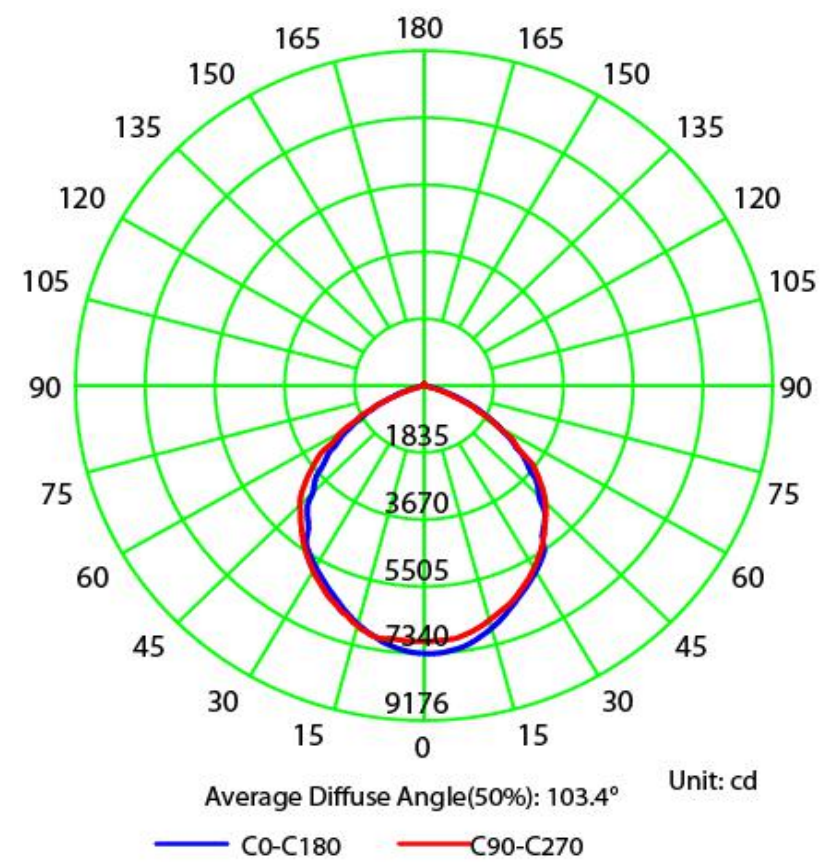

## LED Driver Technical Data

LED Driver Brands	JDC
Power Factor	>0.9
Life Cycle	> 10,000 hours

