



Luminaire Specifications

| | |
|-----------------------|-------------------------|
| Power | 80W, 100W, 150W |
| Input Voltage | AC220 – 240V 50/60Hz |
| Fitting Color | Silver |
| Material | Aluminum, Polycarbonate |
| Ingress Protection | IP 20 |
| Operating Temperature | 20 - 50°C |

Product Features

- Long lifetime
- Energy-efficient lighting for industrial and commercial applications.
- High-performance led chip, energy saving, high light efficiency.
- High CRI, intuitive display, different color temperature for option.


Application

- Warehouse
- Factory
- High ceiling corridor
- Multipurpose hall

| Code | Watt | Lumen | Size | Degree |
|---------------------|------|----------|------------|--------|
| JDC-HBQS-80DN-ZZ-V | 80W | 8694 Lm | 400*253 mm | 120° |
| JDC-HBQS-100DN-ZZ-V | 100W | 9622 Lm | 400*253 mm | 120° |
| JDC-HBQS-150DN-ZZ-V | 150W | 13273 Lm | 400*253 mm | 120° |

LED Technical Data

| | |
|-------------------|--|
| Light LED Source | Led SMD 2835 |
| Color Temperature | 3000K Warm White 4000K Nature White 5700K Cool White |
| Rendering Index | >RA 80 |
| LED life cycle | LM80 52,000hours @ 35°C |

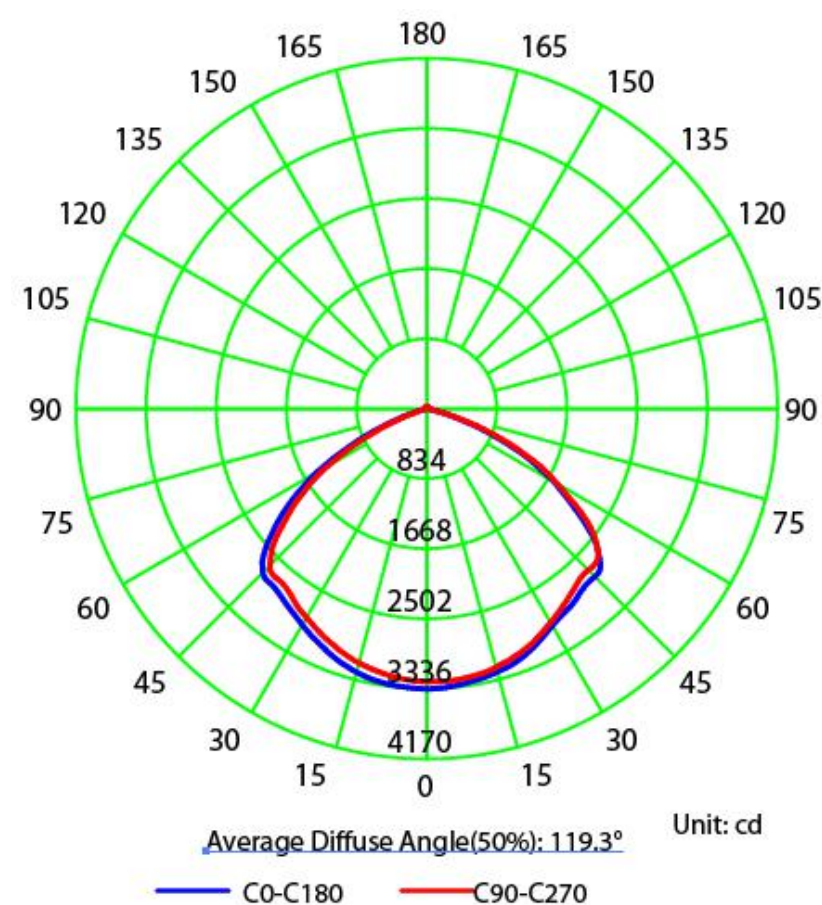

LED Driver Technical Data

| | |
|-------------------|----------------|
| LED Driver Brands | JDC |
| Power Factor | 0.9 |
| Life Cycle | > 10,000 hours |

