

# Panel Downlight



## Luminaire Specifications

Power	6W, 12W, 18W, 24W, 30W, 40W
Input Voltage	AC220 – 240V 50/60Hz
Fitting Color	White
Material	Pure Aluminum, Polycarbonate
Ingress Protection	IP 20
Operating Temperature	20 - 50°C

## Product Features

- Long lifetime, Energy-efficient lighting
- Energy saving, high light efficiency.
- High thermal conductivity aluminium.

## Application


- Galleries, Homes, Schools, Offices, Hotels, Restaurants, retail stores
- Commercial or industrial applications.



Code	Watt	Lumen	Size	Degree
SL-PLCR3-40DN-PP-V	40W	3800 Lm	185*225*50 mm	120°

### LED Technical Data

Light LED Source	Lumileds LUXEON 3030 2D
Color Temperature	3000K Warm White 4000K Nature White 5700K Cool White
Rendering Index	>RA 70
LED life cycle	LM80 52,000hours @ 35°C

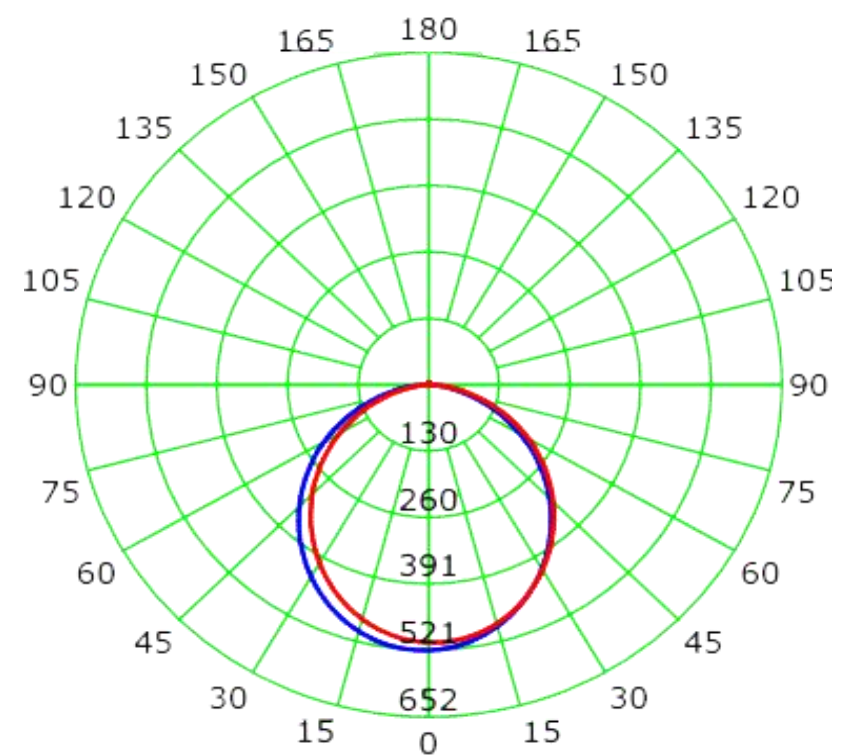

### LED Driver Technical Data

LED Driver Brands	Philips Xitanium
Power Factor	>0.9
Life Cycle	>50,000 hours
Certificate	EN61000 , EN61347-1, EN 61347-2-13

