



## Luminaire Specifications

Power	12W, 18W, 24W
Input Voltage	AC220 – 240V 50/60Hz
Fitting Color	White
Material	Pure Aluminum, Polycarbonate
Ingress Protection	IP 20
Operating Temperature	20 - 50°C

## Product Features

- Long lifetime, Energy-efficient lighting
- Energy saving, high light efficiency.
- High thermal conductivity aluminium.

## Application


- Galleries, Homes, Schools, Offices, Hotels, Restaurants, retail stores
- Commercial or industrial applications.



Code	Watt	Lumen	Size	Degree
HLP-SDLR05-12-V	12W	863.7 Lm	122*55 mm	150°
HLP-SDLR07-18-V	18W	1300.6 Lm	181*55 mm	150°
HLP-SDLR09-24-V	24W	1970.2 Lm	223*55 mm	150°
HLP-SDLS05-12-V	12W	872.5Lm	122*122*55 mm	150°
HLP-SDLS07-18-V	18W	1300.6 Lm	181*181*55 mm	150°
HLP-SDLS09-24-V	24W	2002.3 Lm	223*223*55 mm	150°

## LED Technical Data

Light LED Source	Led SMD 2835
Color Temperature	3000K Warm White 4000K Nature White 6500K Cool White
Rendering Index	>RA 80
LED life cycle	LM80 52,000hours @ 35°C

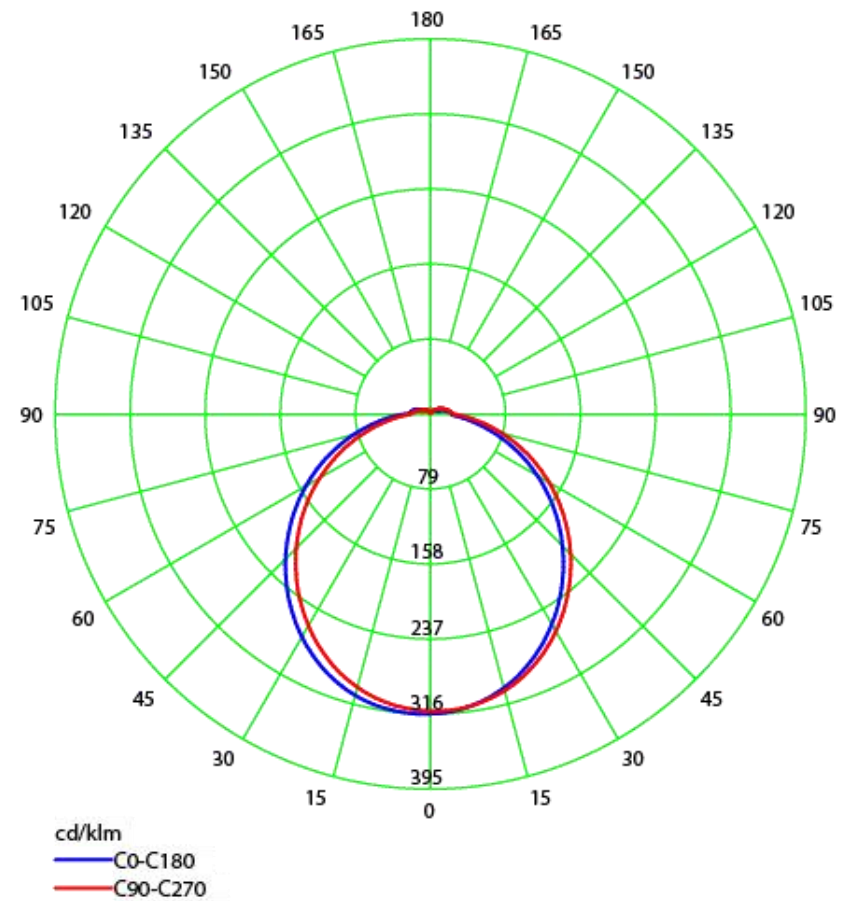

## LED Driver Technical Data

LED Driver Brands	HL Platinum
Power Factor	>0.9
Life Cycle	> 20,000 hours

