

High Bay Light FIN TYPE



Luminaire Specifications

Power	100W, 150W, 200W
Fitting Color	Black
Material	Pure aluminum Fin type, polycarbonate
Ingress Protection	IP 20
Input Voltage	AC220 – 240V 50/60Hz
Operating Temperature	20 - 50°C

Product Features

- Energy-efficient lighting for industrial and commercial applications.
- High CRI, intuitive display, different color temperature for option.
- High thermal conductivity Pure aluminium Fin type
- High performance, High efficiency
- Long lifetime

Application


- Warehouse
- Factory
- High ceiling corridor
- Multipurpose hall
- Auditorium
- Shopping Complex



Code	Watt	Lumen	Size (H*Ø)	Degree
HLP-HBDS2-100DN-ZZ-V	100W	9800 Lm	380*420mm	120°
HLP-HBDS2-150DN-ZZ-V	150W	13700 Lm	380*420mm	120°
HLP-HBDS2-200DN-ZZ-V	200W	17550 Lm	395*480mm	120°

LED Technical Data

Light LED Source	Led SMD 3030
Color Temperature	3000K Warm White 4000K Nature White 5700K Cool White
Rendering Index	>RA 80
LED life cycle	LM80 52,000hours @ 35°C

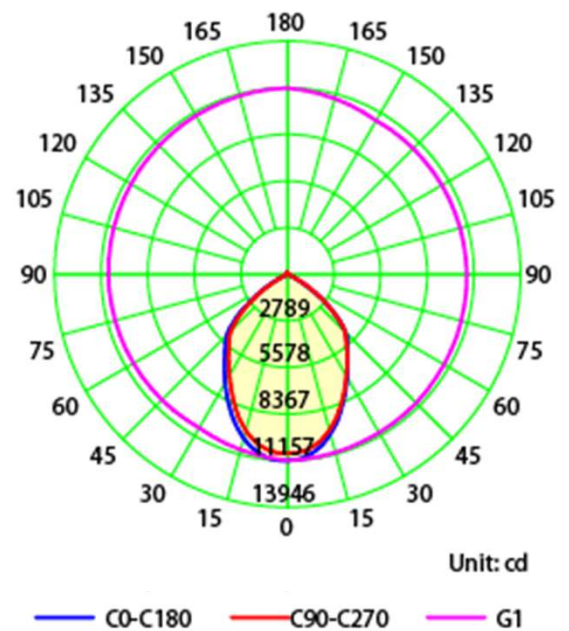

LED Driver Technical Data

LED Driver Brands	HL Platinum
Power Factor	>0.9
Life Cycle	> 20,000 hours

