

CNC425W20 – 1.3M 20X IP Speedome



1.3 Mega

20X

3D-DNR

Dual Stream

TDN

ONVIF

Speedome Function

- 3D Positioning
- Power-Off Memory
- Scheduled PTZ movement
- Park action
- Privacy Mask

Features


Camera

- 1.3 Megapixel 1280x960 @25fps
- H.264 High Profile
- 20x Optical Zoom
- Auto-Iris, Auto-Focus
- 3D-DNR, Dual Stream
- Day & Night by Filter Change
- 0.05 Lux Color
- ONVIF compatible
- Web-server

Hardware

- Weatherproof IP66
- 360° Continuous Pan
- Max 560°/s Pan Preset Speed
- Max 400°/s Tilt Preset Speed
- 1~300°/s Manual Pan Speed
- 1~240°/s Manual Tilt Speed
- 256 Programmable Presets
- 8 Tour (up to 32 presets each)
- 4 Pattern (up to 10min each)
- SD card local storage up to 32GB
- 7 Alarm Input, 2 Alarm Output
- 1 Audio In, 1 Audio Out

Dimension

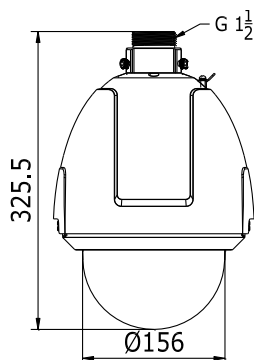

Accessories



4000-Series IP Camera



SPECIFICATION

	Model	CNC425W20
Camera	Image Sensor	1/3" progressive scan CMOS Sensor
	Effective Pixels	1280x960 (1300K)
	Min. Illumination	0.05Lux Color / 0.005Lux BW (F1.4, AGC On)
	S/N Ratio	> 50dB
	Shuttle	1/25 ~ 1/100,100 @50Hz
	Day & Night	Filter Change or TDN (True Day & Night)
Lens	Focal Length	20X (4.3~86mm)
	Aperture	F1.4 ~ F2.6
Mechanism	Pan Speed	1~300°/s Manual, 540°/s Preset
	Tilt Speed	1~240°/s Manual, 400°/s Preset
	Presets	256
	Tour	8 Tour (Each with max. 32 Presets)
	Pattern	4 Pattern (Each last up to 10min)
In/Out	Alarm	7 Alarm In / 2 Relay Out
	Alarm Action	Preset / Tour / Pattern / SD Record / Relay Out / Email
	Audio / Video	1 Audio In / 1 Audio Out / 1 Video Composite Out
Network	Ethernet	10/100 Base-T, RJ45 connector
	Max. Frame Rate	25fps @1280x960 or 1280x720
	Audio Compression	G.711ulaw / G.711alaw / G.726
	Simultaneous Log-in	10
	Dual Stream	Support
	SD Storage	Manual / Alarm Rec, up to 32GB
General	Working Environment	-10° ~ +50°C, <90° Humidity (Non-Condensing)
	Protection	IP66, 4KV surge protection
	Power	24VAC, Max. 40W (Heater On) / 20W (Heater Off)
	Dimension	220mm(φ) x 325.5mm(H), 5kg

* Specification maybe changed without prior notice