


CNC-7310 – Mini Dome Camera, POE, 3.6mm Lens

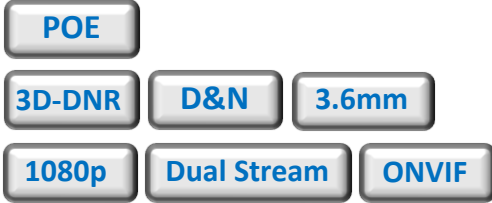

Features


- 2.0 Megapixel 1920x1080 @ 25fps
- H.264 / MJPEG Network Camera
- Auto Focus for Easy Installation
- Dual Stream
- Motion Triggered Alarm
- Multi Language GUI support (@ V2.0)
- ONVIF Compliant (@ V2.0)
- PoE Power supply. 802.3af Class 2.
- SONY CMOS Sensor IMX-036
- 2D/3D DNR
- IE, Firefox, Chrome support
- Contrast Enhancement (Local Exposure)

Specification:


Model	CNC7310
Image Sensor	1/2.8" Sony IMX-036 CMOS Sensor
Resolution	1920x1080 @25fps (PAL) or 30fps (NTSC)
Shuttle	1/4s ~ 1/2000s
Lens	Fixed Lens. F=3.6mm
S/N Ratio	>50 dB
Day & Night	Digital Day & Night
Minimum Illumination	Color: 0.7 lux, B/W: 0.08 lux
Network	10/100-BaseT, RJ45
Bit Rate	32Kbps ~ 4Mbps
Compression	Dual Stream : H.264 High Profile / MJPEG
Working Environment	-10° ~ +50°C, <90° Humidity (Non-Condensing)
Power	POE IEEE 802.3af compliant, 110mA @DC48V, Max. 5.28W
Dimension	ø110 x 67.5mm
Weight	370g

*Specification may changed without prior notice

Terminal:

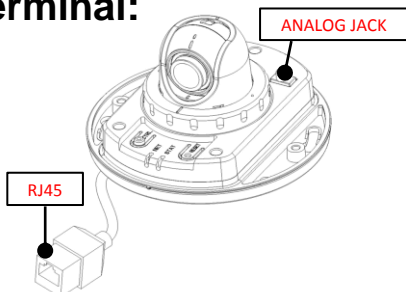

Dimensions:

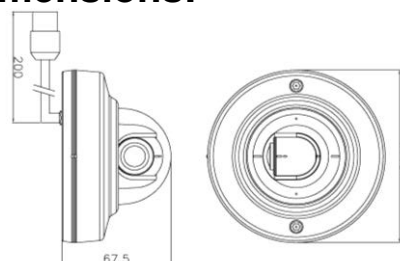

UNIT=mm