



ROTARY DRIVER FOR SWING & FOLDING GATE

GFM - 925 SERIES



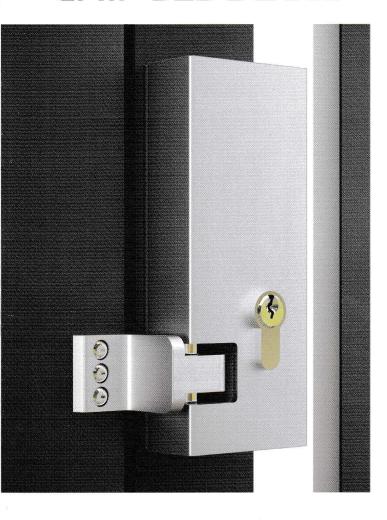

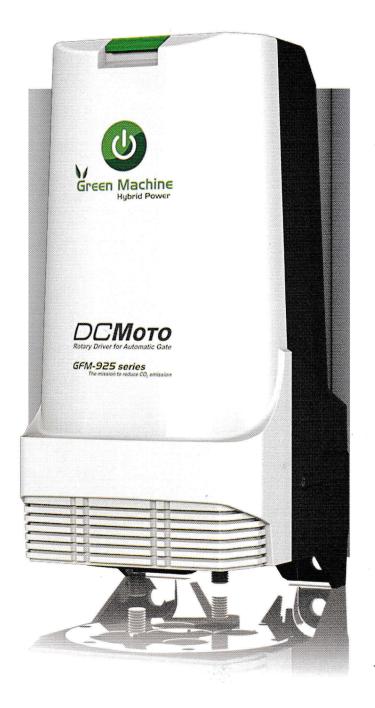

A conventional auto-gate system burns about 10 to 20W of electricity during standby.

DCMοτο[®] HYBRID POWER System will cut off the main supply during standby. The electronic system will get power from the standby battery at merely 0.2 Watt.

The main supply will only be on when running the motor or charging the battery.

This results in a reduction of energy consumption by 95%

AUTO LOCK FOR EXTENDED SECURITY





It drives swing type gate up to 4M or folding gate up to 8M



electromagnetic lock instead of external auto lock

* Easy release in case of system failure

OCMoro





ADVANCE FEATURES



INFRARED SAFETY BEAM

Reverse open when the infrared safety beam detected an obstacle (optional item)



PANIC ALARM

Emergency alarm can be triggered with the remote control or keypad



AUTOMATIC CLOSE TIMER*

The gate will close automatically after being opened for a preset time *(must installed the infrared safety beam)




INTRUDER ALARM *

The infrared safety beam is also acting as an intruder detector *(must installed the infrared safety beam)



MOTION LOCK FUNCTION

To inhibit the gate from motion for some occasions



AUTOMATIC LIGHTING

Automatic switch on when the gate is open or switch from the remote control or keypad

Note: Not all the advance features are available in some model. Please check the specification list

TECHNICAL SPECIFICATIONS:	GFM - 925AL Rotary Driver for Swing Gate & Folding Gate	GFM - 925W Rotary Driver for Swing Gate & Folding Gate
External Auto Lock	YES	NO
Built in Electric LocK	NO	YES
Electric Motor	DC 12V	DC 12V
Main Power Supply	AC 230V	AC 230V
Hybrid Power	YES	YES
3 Speed	YES	YES
Output Torque (Dynamic)	2000kg - cm	2000kg - cm
Output Torque (Static)	3240kg - cm	3240kg - cm
Reduction Gear	4 stages planetary type	4 stages planetary type
Overload Cutoff Protection	YES	YES



Dealer: