

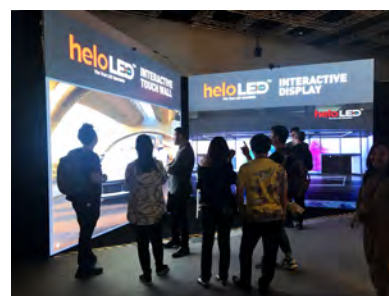



# P2.5 SMD2020

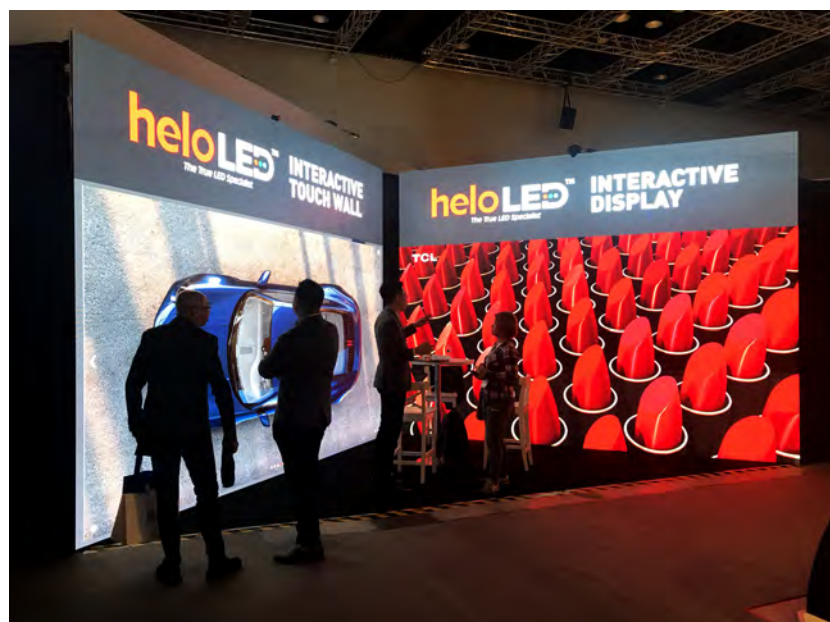

## INDOOR P2.5 FLAT MODULE LED DISPLAY



MODULE SIZE: 320MM X 160MM

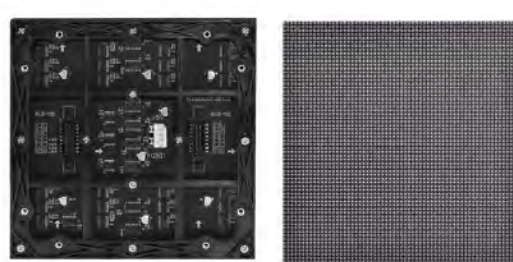

FLAT MODULE : FRONT & REAR VIEW

## QUALITY EQUIPMENT

User-friendly LED Operation System which is able to support major video inputs to be play on screen and equipped with computer control system. Waterproof (outdoor LED), moisture proof, anti-static, anto-corrosion and anti-oxidation. IP 65 Protection signed with long weather-ability. Solid cabinet structure which is extending the screen's lifespan.

## RELIABLE PRODUCTS

High Quality Nationstar LED Chip and Mean Well Power Supply. Our products are compliance with CE & RoHS Certification.



2 YEARS WARRANTY



WORLDWIDE TECHNICAL ASSISTANCE



100% IN-HOUSE TECHNICIAN



24 HOURS SERVICE



BREAKDOWN FAST RESPONSE (WITHIN 4 HOURS)

## VERSATILE

- Cost effective for advertising which advertisement messages can be updated easily.
- Allow multiple messages to be communicated and updating from preferable time-to-time.
- Multiple system input formats playback:  
VIDEO: mov, mpeg, mp4, avi IMAGE: bmp, jpg/jpeg, png, gif, tiff.

## TECHNICAL PARAMETERS

DESCRIPTION	SPECIFICATION
Pixel Pitch	2.5mm Flat
Type	Type Magnetic Modules
Maintenance	Front Maintenance
Display Elements	3 in 1 SMD 1R 1G 1B LEDs
Module Size	320mm(W) x 160mm(H)
Cabinet Size	640mm(W) x 480mm(H)
Cabinet Weight	8kg
Module Resolution	64px (W) x 64px (H)
Brightness	≥1,000 cd/m <sup>2</sup>
Best Viewing Distance	≥ 2.5m
Power Consumption	Max: 600 w/m <sup>2</sup> , Ave: 200 w/m <sup>2</sup>
Viewing Angle	140° Horizontal, 140° Vertical
Number of Pixel per m <sup>2</sup>	160,000/m <sup>2</sup>
Color	281.4 trillion ; 64 level of gray scale
Brightness Adjustment	256 levels of each color (manually) ; 100 levels of each color (automatically)
System Operating	Asynchronous & Synchronous Control System
Operating Platform	Windows, IOS
Control Distance	CAT cable: ≤100m ; Muti-mode fiber: ≤500m ; Single-mode fiber: ≤15km
Lifespan	≥ 100,000 Hours
Chassis Design	Front IP40



USER FRIENDLY BRIGHTNESS ADJUSTMENT



LONG LIFESPAN



HIGH CONTRAST RATIO

Contact us: +6012-723 2935 (Jack) +6017-702 6269

XPOMASS SDN BHD (JM0619854-K)

No. 114, Jalan Gaya 1, Taman Gaya, 81800, Ulu Tiram, Johor Bahru, Johor, Malaysia.

info.xpomass@gmail.com

xpomass.com.my