


# P4 SMD1415 OUTDOOR LED DISPLAY

Product Code/Model: HOP4SC960MMX960MM



## LED MODULE

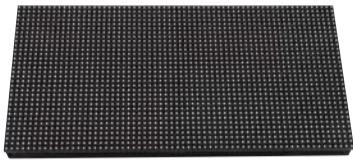

## QUALITY EQUIPMENT

User-friendly LED Operation System which is able to support major video inputs to be play on screen and equipped with computer control system. Waterproof (outdoor LED), moisture proof, anti-static, anto-corrosion and anti-oxidation. IP 65 Protection signed with long weather-ability. Solid cabinet structure which is extending the screen's lifespan.

## RELIABLE PRODUCTS

High Quality Nationstar LED Chip and Mean Well Power Supply. Our products are compliance with CE & RoHS Certification.



## VERSATILE

- Cost effective for advertising which advertisement messages can be updated easily.
- Allow multiple messages to be communicated and updating from preferable time-to-time.
- Multiple system input formats playback:  
VIDEO: mov, mpeg, mp4, avi IMAGE: bmp, jpg/jpeg, png, gif, tiff.



2 YEARS WARRANTY



WORLDWIDE TECHNICAL ASSISTANCE



100% IN-HOUSE TECHNICIAN



24 HOURS SERVICE



BREAKDOWN FAST RESPONSE (WITHIN 4 HOURS)



1 TO 1 EXCHANGE (IF DEAD PIXELS MORE THAN 0.03%)

## TECHNICAL PARAMETERS

DESCRIPTION	SPECIFICATION
Pixel Pitch	4mm
Pixel Density	62,500 pixel/m <sup>2</sup>
Pixel Component	1R1G1B (3 in 1 LEDs)
LED Configuration	SMD1415
Module Dimension	320mm (W) x 160mm (H)
Module Resolution	80px (W) x 40px (H) pixels
Scan Mode	1/8
Cabinet Dimension	960mm (W) x 960mm (H) x 125mm (D)
Cabinet Material	Steel
Cabinet Weight	47 Kg
High Brightness	5,000 cd/m <sup>2</sup>
Color Temperature	3,200K-9,500K
Viewing Angle	140° (Hor)
Viewing Angle	140° (Ver)
Contrast Ratio	3000:01:00
Max Power Consumption	≤750 w/m <sup>2</sup>
Ave Power Consumption	≤300 w/m <sup>2</sup>
Operating Power Source	AC85-264V(47-63Hz)
Frame Frequency	60 Frame/S
Refresh Rate	3840 Hz
Gray Level	RGB65536Grade
Brightness Adjustment Level	256 levels of each color (manually) ; 100 levels of each color (automatically)
Brightness Adjustment Mode	Manual/Automatic/Programmable
Control Distance	UTP Cat Cable <100m ; Muti Mode Fiber<500m ; Single Mode Fiber<10Km
Operating Temp	-20°C-+50°C
Operating Humidity	10% - 90%RH
Protecting Rating	IP65
Mean Time Between Failures (MTBF)	>10,000h
LED Life Span	>100,000h
LED Best View Distance	≥3m



USER FRIENDLY BRIGHTNESS ADJUSTMENT



LONG LIFESPAN



HIGH CONTRAST RATIO

Contact us: +6012-723 2935 (Jack) +6017-702 6269

XPOMASS SDN BHD (JM0619854-K)