













# ABOUT US

SUZUKA® Malaysia belongs to the SUZUKA® Group, which holds manufacturing companies in Taiwan, Malaysia, and Thailand. As one of South East Asia's leading manufacturers in decorative building materials, SUZUKA® Malaysia's expertise in wall finishes dates back to its origins in the town of Suzuka, Japan, after World War II. Specializing in a wide range of stone veneers, waterproofing materials, and textured coatings, we offer durable products that are suitable for decorating and protecting both the interiors and exteriors of your homes and commercial buildings.

Not only do our products cater to buildings of various aesthetics and designs, but they also exceed international quality and safety standards. Armed with protection against UV damage, water seepage, dust, dirt and stains, we lower potential maintenance costs in the future. In addition to being an ISO 9001 certified company, we also carry a selection of SIRIM QAS certified products and a range of environmentally-friendly products certified by Singapore Green Label and SIRIM Eco Label.

Within the past decade, we've become an international supplier to number of regions, including Australia, Saudi Arabia, Thailand, Cambodia, Qatar, the United Arab Emirates, Bahrain, Indonesia, Singapore, and West Africa.

To experience why SUZUKA® products are trusted around the world, choose from our extensive range of coatings and artificial stone veneers.



The KASTPANEL Collection features pre-cast concrete effect panels in a variety of shades, sizes & patterns. Each piece is uniquely crafted to truly mirror the authentic feel and appearance of real, pre-cast cement. Without sacrificing texture, KASTPANELs also manage to be light and compact in nature, rendering them easily transportable and installable. Bringing the stark elegance of exposed concrete to your interior space has never been this easy.


















**NOTE:** Colour may vary due to printing and lighting conditions. Please examine product samples prior to ordering. Colour will vary slightly between pieces (Colour Variation: V2).

#### Size 1

Size: **910 x 910mm** Thickness: 11mm Weight: 8.2 - 8.6kg/pc Packaging: 4pcs/1pc

#### Size 2

Size: **600 x 910mm** Thickness: 11mm Weight: 5.2 - 5.7kg/pc Packaging: 6pcs/1pc

#### Size 3

Size: **300 x 910mm** Thickness: 11mm


## Technical Specfications

### Colour A Use with KASTONE® Grouting GM-11 & 12



KPC003-A



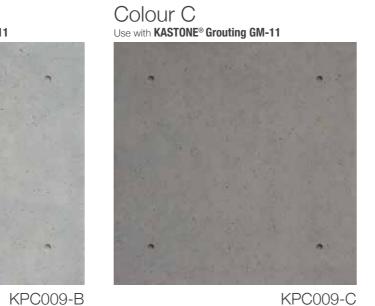













Weight: 2.6 - 3.0kg/pc Packaging: 10pcs/2pcs KASTPANEL



Product Care



UNDER THE ROOF ONLY



For outdoor use, please see our ECES: Concrete Effect Coating Collection

# Product Features
















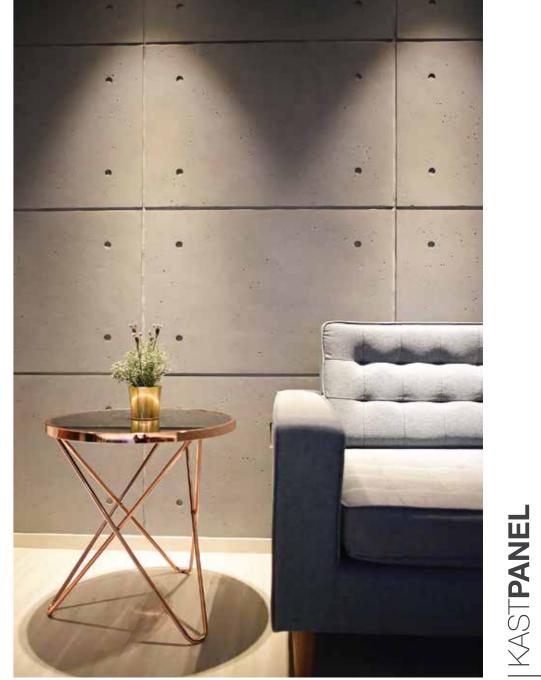







## Installation Instructions

#### Step 1



#### Step 2

Ensure your wall surface is non-wavy, dry, and solid. If your surface is too wavv for the panels to be nailed in flatly, a wooden frame can be built as a backing for the panels.



#### Step 3

Plan the grouting design and panel layout. Pick the size and colour of the panels.



#### Step 4


Some panels may need to be trimmed to fit your wall dimensions.






#### Step 5

Install the panels working from the bottom upwards. For installation with grouting, the use of spacers and a leveler is recommended.

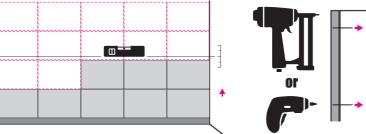

#### Step 6a

Use a **nail gun** (recommended) or a drill with wall plugs to affix the panels. Ensure the centre and sides of the of the panels are tightly secured to the wall.




#### or 6b

Apply construction adhesive on the back of the panel and stick to the wall. Hold the board to ensure it is in place, use a spacer to support the grouting.



#### Step 7

Cover the nailed areas and the grouting between the panels with KASTONE® GROUTING.



### Important ①

a. If you wish to secure anything to/on top of these panels, ensure the items are also secured to the existing wall/substrate behind. KASTPANEL is not suitable for supporting external items.

b. KASTPANEL is not suitable for installation on wavy or unstable surfaces.


c. KASTPANEL is not suitable for areas containing high moisture.

Maintenance

Do not clean panels with liquids.

Dusting or wiping with a dry cloth is sufficient.

d. Do not bend KASTPANELs.



are fragile.

f. Do not leave KASTPANELs resting against the wall.



is not suitable for exteriors/outdoors. To find a similar concrete finish for your exteriors, please see our SUZUKA® ECES Collection at www.suzuka.com.my

#### Managing corners & edges How touch up the nail/screw mark?

- 1) Mix the filler with 10-15% water to create a paste.
- 2) Fill the marks with the paste only in indented area, do NOT overfill.
- 3) Remove all excess material around the mark with sponge or clean brush.
- 4) Allow the paste to dry for 4 hours.
- 5) Use a small brush to dab the paint onto the area, do **NOT** paint around the area.

### Recommended Tools







Recommended
Air Nail Gun
Electronic Drill
Circular Saw Tool
With a fine diamond blade
Spacers









Protective Mask











GM-12