


COMPACT 800i-3UK

Line Interactive UPS

Affordable Compact UPS for Office
Desktop Systems and IT Equipments



- Digital Microprocessor Controlled for High Reliability Design
- Built-in Automatic Voltage Regulator for Voltage Stabilization
- Auto Restart after AC recovering from Battery low
- Cold Start and Off Charging Mode
- 3 x British Outlets with Safety Shuttle
- Generator Compatible

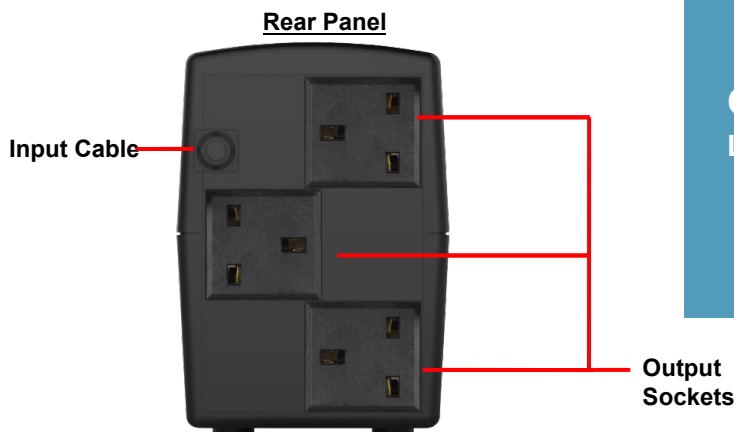

COMPACT 800i-3UK Line Interactive UPS

Technical Specifications

Models		COMPACT 800i-3UK
Power Rating		800VA / 360W
Input	Nominal	220-240VAC
	Range	140-300VAC
	Frequency	50/60 Hz (Auto sensing)
Output	Nominal	220-240VAC
	Voltage Regulation (Battery)	+/- 10%
	Frequency (Battery)	50 / 60 Hz +/- 1%
	Waveform (Battery)	Simulated Sinewave
	Current	3.5A
	Outlets	3 x British Outlets with Safety Shutter
Battery	Rating (QTY)	12V 7AH (1)
	Type	Sealed Lead Acid Maintenance Free
	Recharge Time	8 Hours Max to 90% After Complete Discharge
Backup Time*	Depending on load	19 mins for a one PC with 15" Monitor
Transfer Time	Response Time	Typically 4ms
Audible Alarm	Beeping	Battery Mode, Battery Low, Overload & Fault
Display	LED	Normal AC Mode: Blue Backup Mode: Blue Blinking
Physical	Dimension W x D x H, mm	96 x 286 x 138
	Weight, Kg	4.2
Operating Environment	Temperature	0 to 40°C
	Humidity	0 – 90% without condensation
	Noise Level	Less than 40dB at 1 meter

- Backup times are approximate and may vary with equipment, configuration, battery age, temperature, etc.*
- In the interests of continuous product improvement, all specifications are subject to change without notice.