HB Series

High Quality Fullrange Box Speaker







Suitable for fixed installations, the HB 530 series speaker range provides premium sound quality for surface mounted applications in hotel BGM system, Malls, F&B, retail outlets, museums and galleries. Couple them with our SB 515 Sub-woofer and get the best out of the system. You'll be amazed by the sound it can produce!

HB 530 series speaker range comes in High Impedance, Low Impedance and Wireless options. The High Impedance option is meant for long distance speaker distribution, Low Impedance option is for short distance speaker coverage, and the wireless option is meant for any situation when cabling is a challenge in project deployment.

RSTRFAM



- 5" Fullrange point source driver
- Enclosed in a durable High Impact ABS enclosure
- Epoxy coated mesh to blend into most surroundings
- Suitable for background music distribution applications such as malls and hotels
- Available in models for high impedance, low impedance and wireless AirStream application

HB Series


High Quality Fullrange Box Speaker





Technical Specifications

	HB 530	HB 530-L	HB 530-AS
Frequency Response (-10dB)	45Hz to 19kHz	45Hz to 19kHz	45Hz to 19kHz
Frequency Response (-3dB)	60Hz to 16kHz	60Hz to 16kHz	60Hz to 16kHz
Nominal Power (W)	30W	30W	30W
Maximum Power (W)	60W	60W	60W
Sensitivity (dB) 1W@1m	90dB	90dB	90dB
Nominal Impedance ()	333Ω	8Ω	N/A
Wireless	N/A	N/A	AirStream
Speaker Component	5" Fullrange Speaker	5" Fullrange Speaker	5" Fullrange Speaker
Speaker Enclosure	High Impact	High Impact	High Impact
	ABS Enclosure	ABS Enclosure	ABS Enclosure
Dimensions (WxDxH)	190 x 170 x 250 mm	190 x 170 x 250 mm	190 x 170 x 250 mm
Weight	2.2kg	2kg	2.4kg

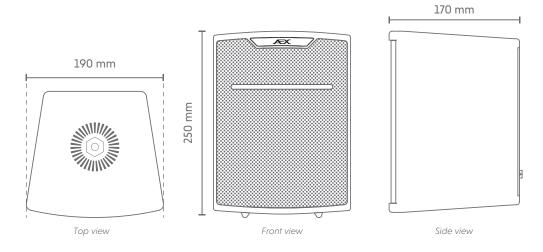

HB 530 | HB 530-L | HB530-AS

Technical Alteration Reserved www.aexsystem.com