

HB Series

High Quality Fullrange Box Speaker



Suitable for fixed installations, the HB 550 series speaker range provides premium sound quality for surface mounted applications in hotel BGM system, Malls, F&B, retail outlets, museums and galleries. Couple them with our SB 515 Sub-woofer and get the best out of the system. You'll be amazed by the sound it can produce!

HB 550 series speaker range comes in High Impedance, Low Impedance and Wireless options. The High Impedance option is meant for long distance speaker distribution, Low Impedance option is for short distance speaker coverage, and the wireless option is meant for any situation when cabling is a challenge in project deployment.

HB 550



HB 550-L



HB 550-AS



AIRSTREAM

- 5" Fullrange point source driver
- Enclosed in a durable wooden enclosure finished
- Epoxy coated mesh to blend into most surroundings
- Suitable for music distribution applications such as in malls and hotels.
- Available in models for both high impedance, low impedance and wireless AirStream application


HB Series

High Quality Fullrange Box Speaker



Technical Specifications

	HB 550	HB 550-L	HB 550-AS
Frequency Response (-10dB)	45Hz to 19kHz	45Hz to 19kHz	45Hz to 19kHz
Frequency Response (-3dB)	60Hz to 16kHz	60Hz to 16kHz	60Hz to 16kHz
Nominal Power (W)	50W	50W	50W
Maximum Power (W)	100W	100W	100W
Sensitivity (dB) 1W@1m	92dB	92dB	92dB
Nominal Impedance (Ω)	200Ω	8Ω	N/A
Wireless	N/A	N/A	AirStream
Speaker Component	5" Fullrange Speaker	5" Fullrange Speaker	5" Fullrange Speaker
Speaker Enclosure	MDF Wooden Enclosure	MDF Wooden Enclosure	MDF Wooden Enclosure
Dimensions (WxDxH)	189 x 174 x 242 mm	189 x 174 x 242 mm	189 x 174 x 242 mm
Weight	2.8kg	2.6kg	3.4kg

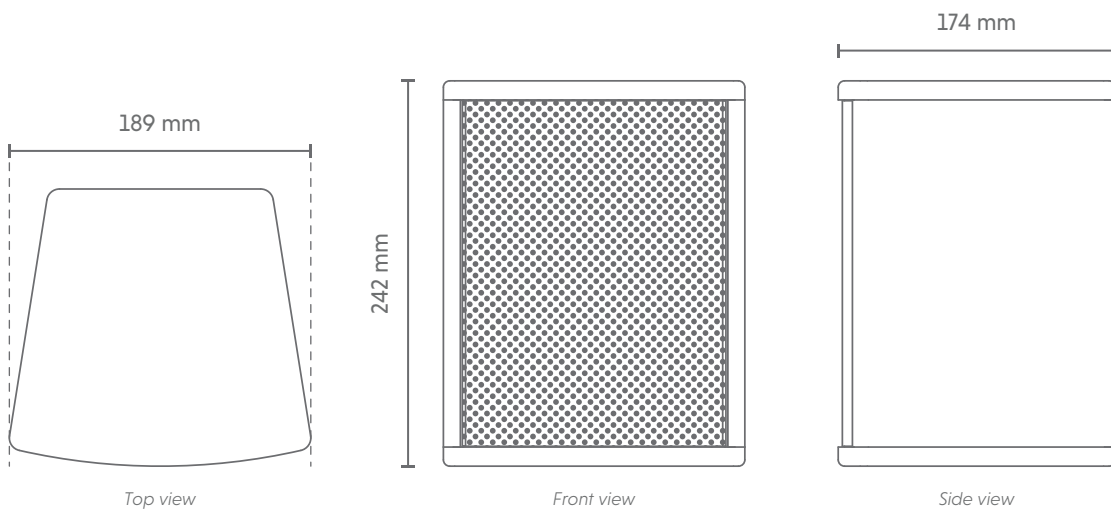

HB 550 | HB 550-L | HB550-AS