


Digiplex EVO

High Security and Access System

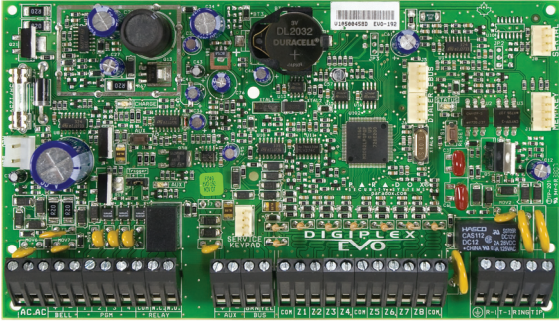

Description

Digiplex EVO systems (EVO48 and EVO192) provide the highest level of protection for banks, high-security military and government sites, luxurious residential homes and any place where maximum security is essential. The modular concept of these systems provide installers with labour-saving features that make expanding, installing and servicing these systems quick and convenient.

Expand your system by adding expansion modules anywhere, in any combination, on the 4-wire combus. Modules are connected to the combus at the most convenient location and their zone inputs are assigned to the desired zone and partition. Keyswitches, remote controls, and unused module inputs do not use zones. Once installed, all combus modules (including motion detectors) can be programmed remotely via a keypad, WinLoad, or the BabyWare PC software.

Digiplex EVO integrates access control solutions. Your alarm system user database can be used to manage the access for up to 32 doors, and the monitoring of these doors can be included in any partition. By merging security and access control, Digiplex EVO systems increase the level of protection offered by security systems to a whole new level.


Feature Comparison

Feature	EVO48	EVO192
Maximum Zones*	48	192
On-board Zones	8 (16 with ATZ)	8 (16 with ATZ)
Partitions	4	8
User Codes	96	999
Multibus	-	3
Sleep Arming	3	3
Panel In-field Firmware Upgradable	3	3
Access Control (Doors)	32	32
Access Levels / Schedules	16 / 32	16 / 32
Events Buffered	1024	2048
PGMs	250 (2 on-board)	250 (5 on-board)
PGM +/- Trigger	3	3
Virtual Zones**	32	32
Expansion Modules*	127	254
Supports IP/GPRS/GSM Communication (PCS Series)	3	3
Supports VDMP3 Plug-in Voice Module	3	3
Supports IP100 Internet Module	3	3
Software	WinLoad, NEware, BabyWare	WinLoad, NEware, BabyWare
Listen-in Capabilities	3	3

* Can be any combination of hardwire, wireless or addressable zones, or modules
 ** Automate PGM activations without occupying security zones

System Overview

Control Panels



EVO192

EVO192 : 8 to 192-Zone Control Panel
EVO48 : 8 to 48-Zone Control Panel

PCS Series

Communicator Modules



- Report via IP (PCS300 only)
- Report via GPRS to IPR512 monitoring receiver
- Report via GSM (PCS200 only)
- Upload/download with WinLoad via GPRS
- Send and receive SMS messages

IP100

Internet Module



- P reporting
- Send emails
- Control and monitor via web browser
- Connect directly to panel via 4-pin port

VDMP3

Plug-in Voice Module



- Record a Site ID to identify the installation site
- Send voice messages (8 phone numbers)
- Control and monitor via phone
- Mount on control panel or PCS module

Software & Accessories

BabyWare : PC Software
WinLoad : Installer Software
NEware : End-user Software
PMC5 : Memory Key
InField : Firmware Upgrade Software
307USB : Direct Connect Interface
CV4USB : RS-485/RS-232 Converter
TEMP07 : Temperature Sensor



Keypads



TM4

TM4 : Touch Interface Module
K656 : Touch Sense Keypad
K07C : Grafica Color LCD Keypad
K641 : 32-Character Blue LCD Keypad
K641R : 32-Character Blue LCD Keypad with Integrated Card Reader

Digital Motion Detectors



DG85

DM50 : Dual Element Motion Detector
DM60 : Quad Element Motion Detector
DM70 : Dual-optic High-performance PIR
DG85 : Outdoor Dual-optic High-performance PIR
DG457 : GlassBreak Detector
DG467 : 360° Ceiling-mounted PIR

Zone Expansion & Door Contact Modules



ZX32PSD

ZC1 : Door Contact Module
ZX1 : 1-Zone Expansion Module
ZX4 : 4-Zone Expansion Module
ZX8 : 8-Zone Expansion Module
ZX8D : 8-Zone Expansion Module
ZX16D : 16-Zone Expansion Module
ZX32PSD : 32-Zone Expansion Module
RTX3 : Wireless Expansion Module

Access Control Modules



ACM12



R915

ACM12 : 4-Wire Access Control Module
R910* : 4-Wire Proximity Card Reader
R915* : 4-Wire Proximity Card Reader/Keypad

* Other Wiegand Readers + Cards Available

Modules: Listen-in / Power and Hub / Special



SUB1

LSN4 : Listen-in Module
SUB1 : Listen-in Substation
PGM4 : 4-Output Expansion Module
PRT3 : Integration Module
PS17 : 1.7A Power Supply Module
HUB2 : 2-Port Hub
HUB4D : 4-Port Hub and Bus Isolator Module

Feature Details



Internet Communication (IP100)

The IP100 Internet Module allows you to control and monitor your security system remotely through any web browser. It allows for email notifications of important system events such as alarms, arm/disarm events, and troubles. For example, receive an email at work when your kids get back from school. You can also view the live status of your system and arm/disarm it. For example, you have just left your office for the weekend but are not sure you remembered to arm the system. Simply check the status of your system from a laptop and arm it.



Wireless Communication (PCS Series)

The PCS series modules provide the Digiplex EVO control panels with wireless communication capabilities to report system events via IP, GPRS, and/or GSM. Whether it be uploading/downloading via IP or GPRS, receiving system status and events by voice or text message, or reporting to the monitoring station via IP, GPRS, or GSM, the PCS series enhances the communication capabilities of any Digiplex EVO installation.



Voice Communication (VDMP3)

The VDMP3 is a plug-in, voice-assisted module that can be programmed to call up to 5 telephone numbers in the event of an alarm. For example, when an alarm occurs at your store during off-hours, every employee can receive notification via telephone; e.g., "Area 1 in alarm. Zone 3. Press 1 to disarm the system..." You can also call the VDMP3 from an outside line, enabling you to arm or disarm the system as well as activate PGMs. The VDMP3 essentially turns any outside telephone into a keypad. The VDMP3 is easy to install; plug it in directly onto the panel, set the phone numbers, and select the activation event.



In-field Upgradable


Digiplex EVO is not only easy to install, but is also fully in-field upgradable for simple on-site updates. The process is effortless; connect the PC to the panel and you are a few clicks away from performing a complete system upgrade within minutes. No need to change panels or hardware; all the updates are done using Paradox's InField Firmware Upgrade Software.



Access Control

Access control can be added to the Digiplex EVO system to provide additional control over who has access to your premises, even when your security system is not armed and you are not there to supervise. With added access control you can limit access to certain areas, disallow access to others, or control entire groups of people according to their schedule or privileges. Make your premises inadmissible to all except those with access cards, track anybody who enters your premises, print detailed reports of access control activities, and more.

TM4 Overview

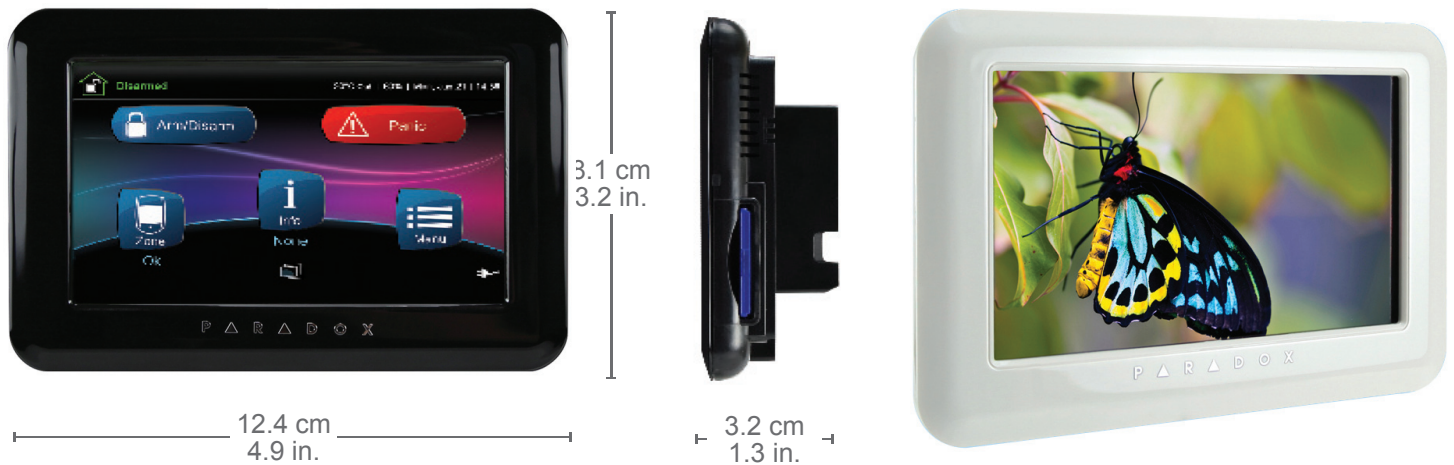

■ User-friendly

Filter zone/area lists by their status, and find specific zones/areas by using a search function. Featuring intuitive menus and icons, ultra-fast response time when scrolling through pages, and clear and precise menu-driven prompts, the TM4 makes the user experience easier and friendlier than ever.

■ External SD Media Card Slot

Used to download custom themes and sounds, upload photos for use with the slideshow function, and upgrade firmware.

■ Sensors

A TEMP07 (External Temperature Sensor) can be connected to the TM4's temperature input for outdoor temperature readings.

■ Customizable Labels

Allows the user to customize and edit zones, areas, users, and PGM output labels.

Specifications

Power Input	9 to 16 Vdc, 100 mA max.
Display	4.3-inch (10.9 cm) widescreen color display (480 x 272 pixel resolution)
Colors	Available in Piano Mirror Black and Mirror Ivory White