

FIRST FOR OIL DEHYDRATION

NDU-1NX Neptune Dehydration Unit

Our Neptune dehydrators rapidly return oils to a clean and dry state



NDU-1NX: 15 L/min (900 L/hr)
portable oil dehydration unit

Our Neptune Dehydration Unit 1 is a portable oil dehydration filter cart capable of rapidly removing both free and entrained water to under 100ppm. Ideal for mobile use around a plant or from site to site. The NDU-1NX is rugged enough to run continuously and transport easily in order to clean up heavily contaminated oils.

Extensively specified into:

- Hydraulic applications
- Lubrication systems
- Gearbox oils
- Transformer oils

Filtasorb 2
Next generation
Water absorbent filtration media

The NDU-NX range
utilises Filtasorb2

Introduction

Filtertechnik's range of oil dehydration units are perfect for returning oil contaminated with water back to health cost effectively. By utilising the revolutionary Filtasorb2, Filtertechnik have developed a robust range of oil dehydration units that can return oil at many thousand ppm down to acceptable working levels of water content. Our Neptune range is able to remove water down to below 100ppm.

Should on-site verification of cleanliness and water content levels be required, practical quick connect fittings allow for instant plug-in to the Particle Pal, allowing real time results in ISO/NAS/SAE in a matter of minutes.

Filtertechnik's NDU-NX range is the perfect solution to quickly and cost effectively remove both free & entrained water in oils.

Features

- High Performance Filtasorb2 inserts to achieve 100ppm or better
- Lightweight and portable, perfect for mobile and basement tank access
- Up to 15 L/min flow rate (900 L/hr)
- High volume dirt holding capacity to deliver ISO cleanliness codes of 18/16/13
- Rugged frame with integral drip tray
- All terrain castor wheels for ease of manoeuvre
- Uses standard 110 V or 240 V mains electric

Benefits

- Rapidly remove both free and entrained water from oil
- Low cost replacement filter cells
- Small footprint and easy to transport
- Single pass cleanliness




NDU-INX: 15L/min (900L/hr)

Capable of dehydrating 1,000 Litres of oil in 200 minutes*

*Tests carried out on 1,000 Litres of hydraulic oil. Starting: 2,500ppm
Finishing: under 400ppm, considered a safe water content in hydraulic oil.

2. Filtasorb2 Water Removal - Hydraulic Oil

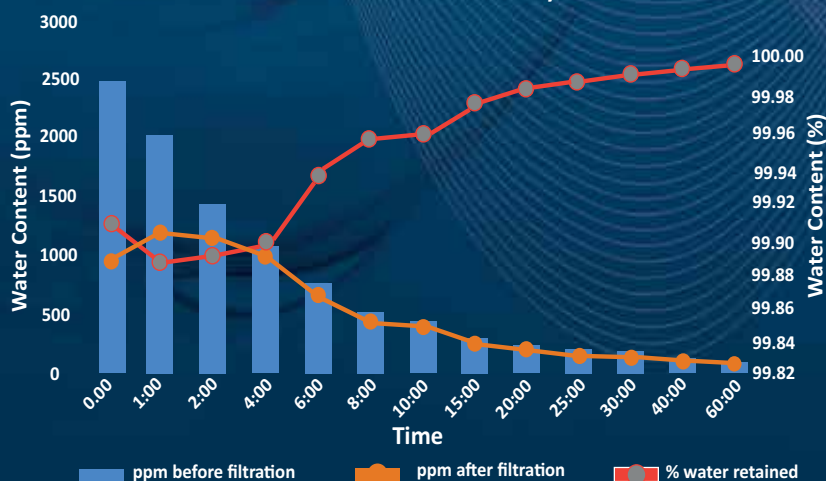

Filtasorb²
Next generation
Water absorbent filtration media

The NDU-NX range
utilises Filtasorb2



UK MANUFACTURED

SPECIFIED INTERNATIONALLY



NDU-1NX

TECHNICAL SPECIFICATION

Model	NDU-1NX
Dimensions	610 mm (W) 690 (D) 1260 (H)
Flow Rate	15 L/min (900 L/hr)
Dry weight	80 Kg
Frame	Mild Steel
Finish	Powder coated
Voltage	110 V / 240 V / 415 V
Frequency	50 Hz ±1%
Current	1.5 Amps (NDU-1NX-415)
	2.5 Amps (NDU-1NX-240)
	5 Amps (NDU-1NX-110)
Switch	Overload contactor
Power	0.55 Kw
Overload	4-10 Amp
Starter contactor	Yes
Pump	Gear Pump
Duty Cycle	Continuous
Noise Level	<70dB @ 1 meter
Motor Protection	Thermal overload protection
Filtration Housing	1x single length housing
Filtration	Size 1 Filtasorb2 for particulate, solid contamination to 18/16/13 or better Remove both free and entrained water down to under 100ppm
Bypass	Cracking 26 psi (1.8 bar)
	Full Flow 32 psi (2.2 bar)
Filter Indicator	Mechanical pressure differential
Pressure	10 bar max
Temperature	55°C max
Medium	Hydraulic and Transformer oils
Environment	IP55
Connections	1" BSP Ball valves



PM TECH RESOURCES
 Recycle Resources
 Reduce Cost

PM Tech Resources, No.5, Jin. Padi Huma 13, Bdr. Baru UDA,
 81200 Johor Bahru, Johor.
 Tel: +07-232 4611 Fax: +07-232 4611 Email: sales@pmttechresources.com

www.pmttechresources.com

Filtasorb²
 Next generation
 Water absorbent filtration media

The NDU-NX range
 utilises Filtasorb2