



Total Health care for everyone

Product

- | Fetal Monitor
- | Fetal Doppler
- | Patient Monitor
- | Vascular Doppler
- | Head lamp
- | Phototherapy
- | Infant Incubator

Fetal Monitor




BT-350 LCD Monitor / LED Monitor

- ◆ 7" TFT color LCD / Large size LED
- ◆ Desktop & Wall mount
- ◆ Display mode variation
 - Graph mode, Number mode, Trend mode
- ◆ Multi language support : 12 Languages
- ◆ Trend : 450 hours (3 hours/patient)
- ◆ Diagnosis function



BT-350E



BT-350L

BT-300 LED Monitor

- ◆ Clear display & Sound
- ◆ Compact & Light (Extreme mobility)
- ◆ Easy to use each function
- ◆ High sensitivity ultrasound probe
- ◆ Carrying bag



Carrying bag



Acoustic stimulator



Specifications		BT-300	BT-350E	BT-350L
FHR	US Frequency		1 MHz	
	FHR Range		30 ~ 240bpm	
FM			Auto-detection & Print	
UC			Range : 0 ~99	
Printer	Type		Thermal Array Type	
	Speed		1,2,3cm/min, high	
	Auto Print (min)		Off, 10,20,30,40,50,60	
Function			FHR II Offset	
Power			Auto FM Print	
Warranty			AC 100 ~ 240V (50 ~ 60Hz)	
Display		LED	LED	7" color LCD
Diagnosis		-	-	0
Others	Multi-language	-	-	0
	Trend(Data Save)	-	-	450hours
Central monitoring system			BCM-350 (RS-232C / Bluetooth)	
Option			Rechargeable battery, Acoustic stimulator	

Fetal Doppler



BT-200S



BT-200L / 200T



BT-200C

BT-200 Sound / Mono / Color

- ◆ FHR LCD / OLED display
- ◆ High quality sound
- ◆ High sensitivity probe (2,3MHz)
- ◆ Hand-held style
- ◆ Low battery indicator
- ◆ Waterproof Probe



Black

White

Blue



BT-220S



BT-220L



BT-220C

BT-220 Sound / Mono / Color

- ◆ 2.4" Color LCD display
- ◆ Acoustic stimulator
- ◆ Air Temp. & Humidity
- ◆ Body fat analysis
- ◆ Mother HR function
- ◆ Rechargeable battery (optional)
- ◆ Variable choice of color
- ◆ Waterproof Probe



BT-250 Desktop Doppler

- ◆ 3.2" Color LCD display
- ◆ Data Save : 4 Hours
- ◆ Multi languages support
- ◆ Built-in rechargeable battery
- ◆ High quality sound
- ◆ High sensitivity(2MHz)
- ◆ Compact & Light
- ◆ Waterproof probe

Specifications	BT-200S	BT-200L	BT-200C	BT-200T	BT-220S	BT-220L	BT-220C	BT-250
US Frequency	2 MHz		3 MHz		2 MHz			
FHR Range	-	50~240		-	30~240			
Display	-	Mono	Color	Mono	-	Mono	2.4" TFT	3.2" TFT
Battery Time (hours)	6						4	5
Power	1.5V AA battery							100~240V
Trend	-	-	-	-	-	-	○	○
Acoustic Stimulator	-	-	-	-	○	○	○	-
Body Fat Analysis	-	-	-	-	-	-	○	-
Mother HR	-	-	-	-	-	-	○	-
Air Temp. & Humidity	-	-	-	-	-	-	○	-
Rechargeable Battery	Option							○

Patient Monitor



BT-750 Multi-parameter Patient Monitor

- ◆ 10.4" Color LCD display
- ◆ ECG(2ch), SpO₂, NIBP, Temp.(2ch), IBP, RESP.
- ◆ PVC and ST level display Pacemaker detection
- ◆ Detection of 12 kinds of arrhythmia
- ◆ Trend : 72 hours
- ◆ Central monitoring system (LAN)



BT-700 Vital Sign Monitor

- ◆ 3.2" LCD display
- ◆ SpO₂, NIBP, Temp.
- ◆ Trend : 4 hours
- ◆ Compact and light
- ◆ Easy F/W upgrade (USB)
- ◆ Apply nurse call state
- ◆ SpO₂ – (700S)
- NIBP – (700N)
- SpO₂+NIBP – (700)
- Temperature – (optional)

Specifications		BT-700	BT-750
Display		3.2" color LCD	10.4" color LCD
Battery Operating Time		3 hours	3 hours
SpO ₂	Measuring Range	0 ~ 100%	0 ~ 100%
	Pulse Rate	70 ~ 100% ±3 20~250 bpm ±3	70 ~ 100% ±3% 20 ~ 300 bpm ±2%
NIBP	Measuring Mode	Auto, Manual, STAT	Auto, Manual, STAT
	Auto Mode(min)	1,2,3,4,5,10,15,30 45,60,90,120,240	1,3,5,10,30,60,90,120, 240
	Adult Systolic	30 ~ 250mmHg	50 ~ 255mmHg
	Adult Diastolic	20 ~ 210mmHg	30 ~ 220mmHg
	Adult Mean	20 ~ 235mmHg	40 ~ 235mmHg
	Neonate Systolic	20 ~ 120mmHg	30 ~ 130mmHg
	Neonate Diastolic	10 ~ 100mmHg	20 ~ 100mmHg
ECG	Neonate Mean	10 ~ 110mmHg	25 ~ 120mmHg
	Lead	-	3/5 leads
	HR Range	-	20 ~ 300 ±3%
Resp	Sweep Speed	-	12.5, 25, 50 mm/s
	Method	-	Transthoracic impedance
	Range	-	0 ~ 150 breaths/min
Temp	Sweep Speed	-	6.25, 12.5, 25 min/s
	Range	-	30 ~ 45°C ±0.1°
Options			
Temp		30 ~ 45°C ±0.1°	-
Printer		-	2", 50mm/s
IBP		-	2 channels
EtCO ₂		-	0

BT-200 Vascular Doppler



- ◆ Compact and light
- ◆ High-Sensitive Doppler Probe
- ◆ 4 Ranges of probes
- ◆ Easy to use
- ◆ Low power consumption
- ◆ Long time continuous use (6 hours)

Specifications	BT-200V
US Frequency	4, 5, 8 MHz
HR Range	50 ~ 240 bpm
Power	1.5V AA Type Battery
Battery Using Time	6 hours

BT-410 LED Head Lamp



- ◆ Light & comfortable
- ◆ Low battery display
- ◆ Quick battery recharge
- ◆ Ultra bright LED
- ◆ Easy to adjust Head band
- ◆ More than 50,000 hours LED life
- ◆ loupe (Optional)
- ◆ Astral Lamp (Optional)


Specifications	BT-410
Illumination	30,000 lux / 50,000 lux (with astral lamp)
Color temperature	6,000 Kelvin
Battery Module	Output : 3.7V Operating time : 4 hours Service life : 800 cycle Capacity : 2,200 mA
Charger	Type : Li-ion (built-in protected circuit module) Input : AC 100 ~ 240v, 50 / 60 Hz Output : DC 4.2V / 750 mA Charging time : 4 hours Battery pack(1cell), Charger, Manual
Standard Accessory	
Optional Accessory	Astral lamp, Loupe (3x), additional battery

Phototherapy

BT-400 Phototherapy



- ◆ Lamp : Blue LED
- ◆ High Intensity of Radiation
- ◆ Long life time (about 20,000 hours)
- ◆ Compact design
- ◆ Flexible geese neck
- ◆ Wide effective area
- ◆ Time counter
- ◆ Easy to Use

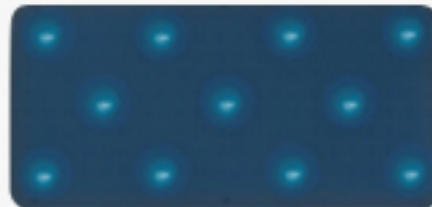

Power 11 LED



Time Counter & Clamp



Cart (optional)

Specifications	BT-400
Light Source	Intensity : 55 ~ 130 $\mu\text{W}/\text{cm}^2/\text{nm}$ Variation in intensity over 6 hours : < 10% Life time : about 20,000 hours Effective area : 40 x 20 cm Wave Length : Peak between 450~475 nm
Power	Input : AC 100 ~ 240V (50/60Hz) Consumption : about 80VA
Heat Output	Over 6 hours : < 10°C
Time counter	Operating time, Total operating time
Audible Noise	< 60dB
Dimension	Main unit : 7.5cm(H) x 34cm(L) x 21cm(D) Cart : 120cm(H) x 43cm(L) x 52cm(D)
Warranty	2 years
Optional Accessory	Cart, Eye shielder

BT-500 Infant Incubator



Full set

- ◆ Stable Air / Skin temperature control
- ◆ Accurate humidity control
- ◆ Comfortable & soft tilting structure
- ◆ 7" Color LCD Display
- ◆ Powerful Lifting cart (optional)
- ◆ SpO2 / O2 Monitoring (optional)



Control unit



SpO2 & Camera



Humidifying module



X-ray tray

Specifications	BT-500	
General	Display : 7" color TFT LCD Double wall hood Weight : 55 kg (exclude stand) Mattress tilt : 12° Air velocity : below 10cm/s (at 10cm above the center of ,mattress)	
Dimension	Main body : 102cm(W) x 61cm(D) x 76cm(H) Mattress : 73cm(W) x 39cm(D) x 27cm(H)	
Air temperature	Normal mode : 23.0°C ~ 37.0°C ±0.3°C (Override mode : 37.1°C ~ 39.0°C ±0.3°C)	
Skin temperature	Normal mode : 35.0°C ~ 37.5°C ±0.3°C (Override mode : 37.6°C ~ 39.0°C ±0.3°C)	
Humidity	Setting range : 40 ~95% (display : 15~99% ±5% RH) Hybrid control : Ultrasonic & Steam humidity	
Option		
Fixed stand	-Dimension : 100cm(W) x 81cm(D) x 80cm(H)	-Weight : 36 kg
Lifting stand	-Dimension : 100cm(W) x 81cm(D) x 62 ~ 82cm(H)	-Weight : 40.5 kg
Weighing scale	Measurement : 0~10Kg ±50g	
SpO2 & CCD Camera	SpO2 Range : 1%~100% ±2 digit (MASIMO module) CCD resolution : 510 x 492 pixel	
O2 Module	Measurement range : 18% ~ 100% ±5%	
TV plate	-Dimension : 40cm x 32cm	-Weight limit : 11kg
Shelf	Dimension : 33cm x 20cm	-Weight limit : 3kg



Bistos Co.,Ltd

Head Office

Bistos Co.,Ltd

7th Fl., A Bldg., Woolim Lions Valley 5 -cha, 144-3,

Sangdaewon-dong, Jungwon-gu,

Seongnam-si, Gyeonggi-do, Korea

Tel : 82-31-750-0340 Fax : 82-31-750-0344

E-mail : bistos@bistos.co.kr <http://www.bistos.co.kr>

U.S.A. Branch

Bistos America Inc.

5850 Farinon Drive, San Antonio, TX 78249, USA

Tel : 210-546-1300 (ext.101), Fax : 210-546-1243

Toll free 1-855-601-2787 (BSTS)

E-mail : info@bistosamerica.com www.bistosamerica.com

China Branch

博特欧（北京）科技有限公司

中国 北京市 崇文区 南小街5号 广渠门桥 领行国际 3-2-2208

邮编号码：80038

联系电话：86-10-5171-7607

电邮：yokims12@bistos.co.kr

Korea domestic sales office

(株) 비스토스 헬스케어

서울시 금천구 시흥동 112-1 보광빌딩 301호

Tel : 02-6267-8898 Fax : 02-6267-8899, Mobile : 016-591-6747

E-Mail : skyyun03@bistos.co.kr