




Lighting Like No Other

# LED FLOODLIGHT 3000 lm


## Features

- High quality LED Chip
- Long lifespan
- Osram test report CERTIFIED
- Robust design
- Weatherproof
- Available in various color temperature and voltage
- Energy saving with multiple power distribution
- Widely used in architectural lighting, pools, factories, outdoor kitchens, backyards, gardens and many more

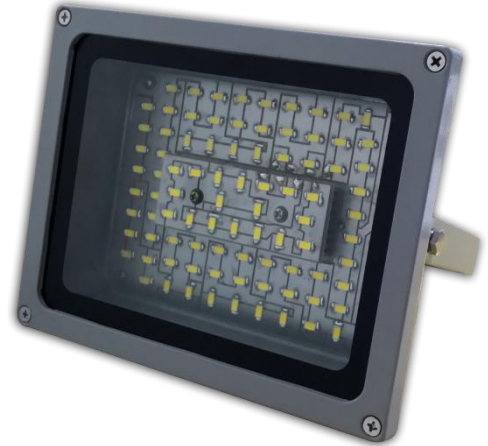

Voltage	180 – 240 VAC
Power Consumption	23 W
Driver	(9-18 x 1w) x 2 units (Isolated)
Power Factor (PF)	0.95
Temperature	TS / TJ / Casing & LED Driver comply to below 80°C
Protection	Lightning Surge Protected 1) Ceramic Resistor 100ohm 2W (Lightning Surge Stabilizer) 2) Zinc Oxide 10000 VA x 3 (8/20µs)
LED Chip Quantity	96 pcs
LED Chip	Osram / Taiwan
LM80 + TM21	Osram LED : Accredited Lab / Taiwan LED : N/A
Luminaire	2894 lm
Efficiency Luminaire / Watt	125.83 lm/Watt
Color Temperature	1) 2700 – 5700 CCT : Osram LED 2) 2700 – 6050 CCT : Taiwan LED
CRI	70 / 80
Beam Angle (deg)	145°
Brightness Distribution (%) *	50 / 100
Power Distribution Features **	Manual / Motion / Photocell / Timer (Optional) ***
Warranty ( Direct Manufacturer To End User )	1) LED Light Depreciation Standard L70 - Osram LED : <b>3 years</b> - Taiwan LED : <b>2 years</b> 2) LED Driver : <b>2 years</b> (All types of LED)

## Wiring Method \*

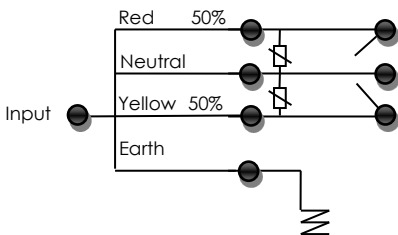

Input **	Luminaire (lm) *	Brightness (%) *	Watt	Switch Mode***
Red / Yellow	1447.00	50.00	11.50	Main On
Red & Yellow	2894.00	100.00	23.00	Optional

## ECO LED LIGHTING SOLUTION

22, Jalan Intan 7/3, Taman Intan, 86000 Kluang, Johor, Malaysia

Tel: 07-7765039 H/P: 017-7800750 / 012-7973811

Website: [www.ecoled.com.my](http://www.ecoled.com.my)

Email: [sales@ecoled.com.my](mailto:sales@ecoled.com.my)

