



Lighting Like No Other

LED FLOODLIGHT 17500 lm


Features

- High quality LED Chip
- Long lifespan
- Osram test report CERTIFIED
- Robust design
- Weatherproof
- Available in various color temperature and voltage
- Energy saving with multiple power distribution
- Widely used in architectural lighting, pools, factories, outdoor kitchens, backyards, gardens and many more



Voltage	180 – 240 VAC
Power Consumption	156 W
Driver	(18-24 x 1w) x 7 units (Isolated)
Power Factor (PF)	0.95
Temperature	TS / TJ / Casing & LED Driver comply to below 80°C
Protection	Lightning Surge Protected 1) Ceramic Resistor 100ohm 2W (Lightning Surge Stabilizer) 2) Zinc Oxide 10000 VA x 4 (8/20µs)
LED Chip Quantity	616 pcs
LED Chip	Osram / Taiwan
LM80 + TM21	Osram LED : Accreditated Lab / Taiwan LED : N/A
Luminaire	17794 lm
Efficiency Luminaire / Watt	114 lm/Watt
Color Temperature	1) 2700 – 5700 CCT : Osram LED 2) 2700 – 6050 CCT : Taiwan LED
CRI	70 / 80
Beam Angle (deg)	145°
Brightness Distribution (%) *	28/44/56/72/ 100
Power Distribution Features **	Manual / Motion / Photocell / Timer (Optional) ***
Warranty (Direct Manufacturer To End User)	1) LED Light Depreciation Standard L70 - Osram LED : 3 years - China LED : 2 years 2) LED Driver : 2 years (All types of LED)

Wiring Method *

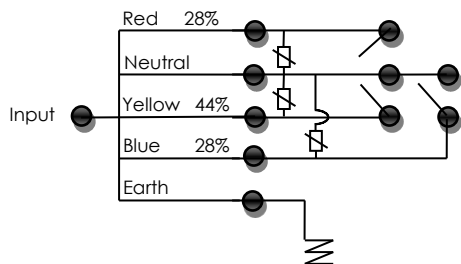

Input **	Luminaire (lm) *	Brightness (%) *	Watt	Switch Mode***
Red	5084.00	28.00	44.57	Main On (Optional)
Blue	5084.00	28.00	44.57	Main On (Optional)
Yellow	7626.00	44.00	66.88	Main On (Optional)
Red & Blue	10618.00	56.00	89.14	Optional
Red & Yellow	12710.00	72.00	111.45	Optional
Blue & Yellow	12710.00	72.00	111.45	Optional
Red & Yellow & Blue	17794.00	100.00	156.000	Optional

ECO LED LIGHTING SOLUTION

22, Jalan Intan 7/3, Taman Intan, 86000 Kluang, Johor, Malaysia

Tel: 07-7765039

H/P: 017-7800750 / 012-7973811

Website: www.ecoled.com.my

Email: sales@ecoled.com.my