

# TCM 8815/17 Series

15" / 17" POS Monitor


## TCM-8815/17 Series features its flexibility and user-friendly design.

It has versatile Touch Screen, adjustable from 4° to 90°. Moreover, it can be extended to a more complete POS solution by simply adding optional POS peripherals.

- Variety of Optional Packages
  - Touch Screen of 15" or 17"
  - Magnetic card reader
  - Finger print scanner
- Slim and Lightweight
- Exchangeable with VESA Wall Mount



### Features



**1. Tilt angle 4°~90° degree**  
Adapt to operation in any environment



**4. Hidden cable management**



**2. MSR / Finger print**



**5. Easy-operate OSD buttons**





**3. Support VESA Wall mount**



**6. Internal power adapter design**

## TCM-8815/17 Series

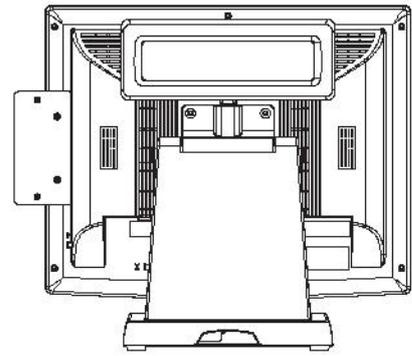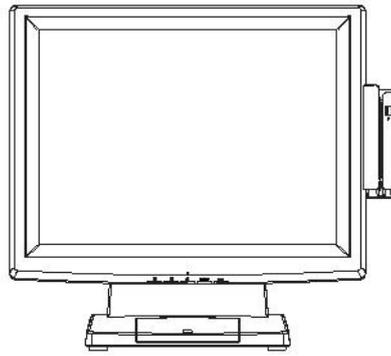

### Specification

Model Name	TCM 8815	TCM 8817
<b>Motherboard</b>	<b>C11</b>	<b>B19</b>
<b>LCD Touch Panel</b>		
LCD Size	15" TFT LED LCD	17" TFT LED LCD
Brightness	250 cd/m <sup>2</sup>	250 cd/m <sup>2</sup>
Resolution	1024x768	1280x1024
Touch Screen	Resistive	
Tilt Adjustment	4° ~ 90°	
<b>External I/O Ports</b>		
USB-IN	1 x USB 2.0 (Type B to PC)	
USB-OUT	1 x USB 2.0 (Type A to Device)	2 x USB 2.0 (Type A to Device)
VGA	1	
DVI	N/A	1
Serial Port	N/A	2 x COM (1 x DB-9/F type to PC, 1 x RJ-45 type to VFD)
DC Jack	1	
OSD Button	2 (power, auto)	5 (down, up, power, menu, auto)
<b>Power</b>		
Power Supply	36W/12V	
<b>Control / Indicator</b>		
Power Button	1	
Indicator LED	1	
<b>Peripheral (option)</b>		
MSR / Finger print	MSR (USB) / Finger print scanner (USB) (Either one module is accepted)	
<b>Certificate</b>		
EMC & Safety	FCC Class A / CE Mark / LVD	
<b>Environment</b>		
Operating Temperature	0°C ~ 35°C (32°F ~ 95°F)	
Storage Temperature	-20°C ~ 60°C (-4°F ~ 140°F)	
Humidity	20% ~ 85% RH non-condensing	
<b>Dimension (WxDxH)</b>	LCD 90° tilt angle: 365 x 218 x 343 mm (14.4" x 8.6" x 13.5")	LCD 90° tilt angle: 399 x 218 x 382 mm (15.7" x 8.6" x 15")
<b>Weight</b>	4.8kg (10.6lbs)	6kg (13.2lbs)
<b>Mousing</b>	100 x 100 mm VESA Standard holes	

Product specifications are subject to change without prior notice.