



Model: AZC2M4i1-VDIR

CE FC RoHS

**DESCRIPTION:**

Dome camera are the most common CCTV cameras for indoor use. The round shape structure gives 'DOME' cameras their unique character and makes it difficult to identify the direction of viewing angle. AZC2M4i1-VDIR used strong metal body casing to avoid vandalism. It has 6pcs Nanometer LED build-in that provide crystal clear view at 30m even at night. And Thanks to the 4 in 1 technology that enables this camera to be used in any coaxial cable with 1080p HD resolution

**FEATURES:**

- 1/3" Sony IMX323 progressive scan CMOS image sensor for excellent image quality
- Supports image resolution up to 1920 x 1080P (30fps)
- 2D & 3D noise reduction
- Max. Transmission distance: 400m via RG6U / 300m via RG59U coaxial
- Support CoC (control over coaxial)
- Support 4 type analogue format, HDTV / HDCVI / AHD / CVBS, switchable by the OSD button on the cable
- Switch to CVBS format to use it on any standard Analog equipment
- 6pcs Nanometer LED
- Metal Casing with IK10 rating

**Ordering Information**

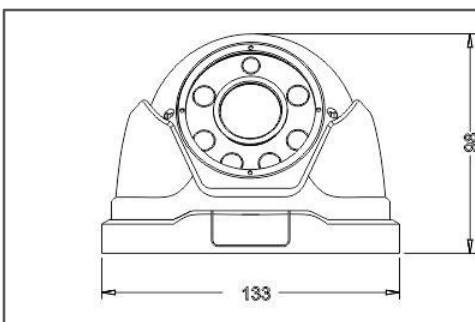
Model No	AZC2M4i1-VDIR
Dimension (L x H x W)	98mm x Ø133mm
Weight	830g
Product Box Size	155 x 155 x 130 mm
Carton Size; Qty / CTN	480*325*410mm; 18pcs/ctn

**Precaution**

- Do not install camera in with temperature above 50°C or under -10°C.
- Do not install in a places with high humidity
- Do not face the camera to a strong light
- Do not drop the camera and avoid physical shock.
- Its highly important to use the correct and suitable power supply (DC12V) for the camera.
- Only Professional and qualified technician can install and test the camera

MODEL	AZC2M4i1-VDIR
<b>CAMERA</b>	
Image Sensor	1/2.9" Sony IMX323 CMOS
Effective Pixels	1920(H) × 1080(V), 2MP
Resolutions	2MP (1920 × 1080)
Electronic Shutter Speed	PAL: 1/4s ~ 1/100,000 sec
Signal To Noise Ratio	More than 50dB
Minimum Illumination	0.1Lux / F2.0 (Color); 0.001Lux / F2.0 (IR ON)
IR LED Type	6pcs Nanometer
IR Distance	25M
AGC	Yes
Lens	2.8-12mm 3MP board type
Video Compression	25/30fps@1080P, 25/30fps@720P
Video Output	Default 1-channel BNC CVI output, switchable to AHD, TVI, CVBS
OSD Languages	English/ Chinese/ German/French/Italian/Spanish/Polish/Russian/Portuguese/Dutch/Turkish
Day / Night Mode	Color/BW/EXT/Auto
DWDR	Off / On/ Auto
Digital Noise Reduction	2D & 3DNR
BLC	Off / Low / Medium / High
HLC	Yes, up to 4 area
Sense Up	Off / On (range x2 – x30)
Privacy	Yes, up to 4 zone
Motion Detection	Yes, up to 4 zone
Defog	Off / Auto
White Balance	ATW, AWC-SET, Indoor, Outdoor, Manual,AWB
<b>OPTIONAL</b>	
Audio	-
<b>GENERAL</b>	
Power Source	DC12V ± 25% / 800mA
Power Consumption	Max. 9.6W (12V DC)
Net Weight	720g
Dimension (L x W x H) mm	Ø133 x 98mm
IP Rating	IP66
Body Material / Vandalproof Rating	Metal / IK10
Operating Temperature	-10°C ~ +50°C / > 90% RH
Storage Temperature	-40°C ~ +60°C / > 95% RH

Specifications subject to change without notice. © 2017. All rights reserved.

**STRUCTURE:****CONNECTOR:**